
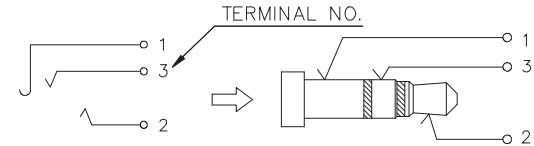
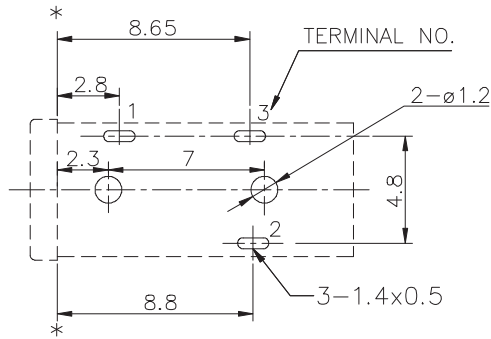




PRODUCT NUMBER
10123766-H00XLF

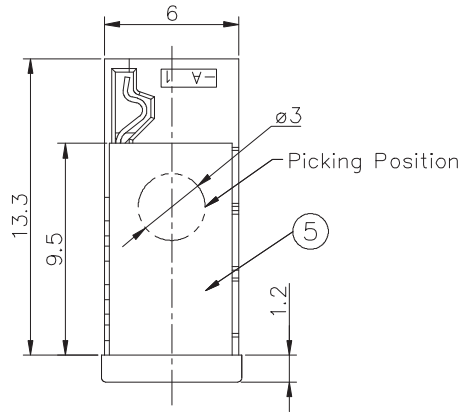

SCHEMATIC
(CODE: H)

PLUG INSERTED



PCB HOLES(BOTTOM VIEW) t=1.6mm
NOTE: GENERAL TOLERANCE: ±0.05mm

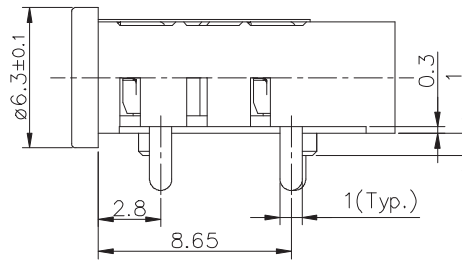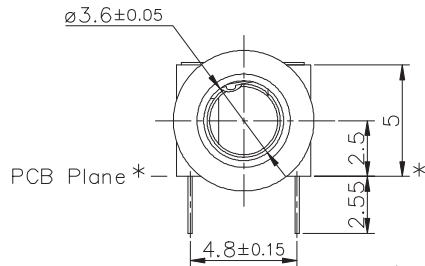

NOTES:

1. MATERIAL: SEE MATERIAL TABLE.
2. PRODUCT SPECIFICATION: GS-12-1160.
3. PACKAGE SPECIFICATION: GS-14-2338.
4. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004.
5. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE 5 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
6. PART NUMBER DEFINITION:

10123766-X X X X LF
 LEAD FREE
 MYLAR - BLANK: WITH MYLAR; N: NO MYLAR
 PLATING - 0: Ag
 HSG COLOR - 0: BLACK
 CIRCUIT SCHEMATIC CODE

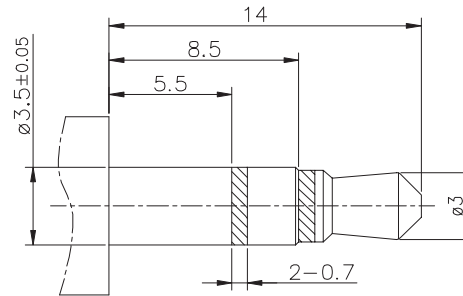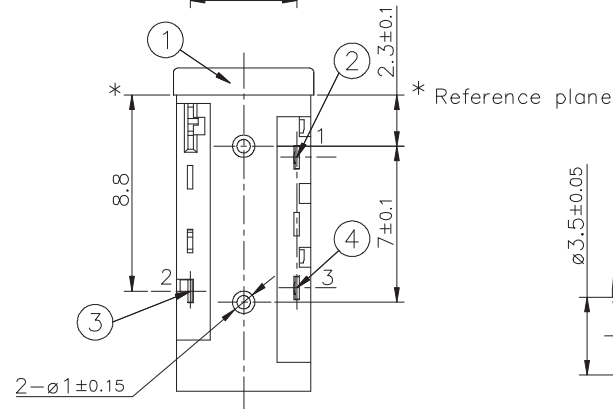

RECOMMENDED PLUG
ø3.5 3-POLE STANDARD PLUG

⑤	MYLAR		1	MYLAR t=0.11	
④	RING TERMINAL	3	1	STAINLESS STEEL t=0.20	Ag-PLATED
③	TIP TERMINAL	2	1	STAINLESS STEEL t=0.20	Ag-PLATED
②	EARTH TERMINAL	1	1	STAINLESS STEEL t=0.20	Ag-PLATED
①	HOUSING		1	PA9T 94V-0	BLACK

NO.	PART NAME	TER.NO.	QTY.	MATERIAL	REMARK
mat'l. code		surface	tolerance	projection	product family
ltr	ecn no	dr	date	tolerances unless otherwise specified	
A	TAI	2014-03-25		angles	16<L≤63 ±0.4
B	ELX-T-18985	TAI	2014-10-13	in/out	4<L≤16 ±0.3
				X±5°	L≤4 ±0.2
		dr	KENNY TAI	2012-12-18	scale
		enrg	KENNY TAI	2012-12-18	
		chr	KENNY TAI	2013-12-02	
		appd	PM ZHENG	2014-03-25	
sheet index	revision sheet	B	B		
		1	2		

