


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

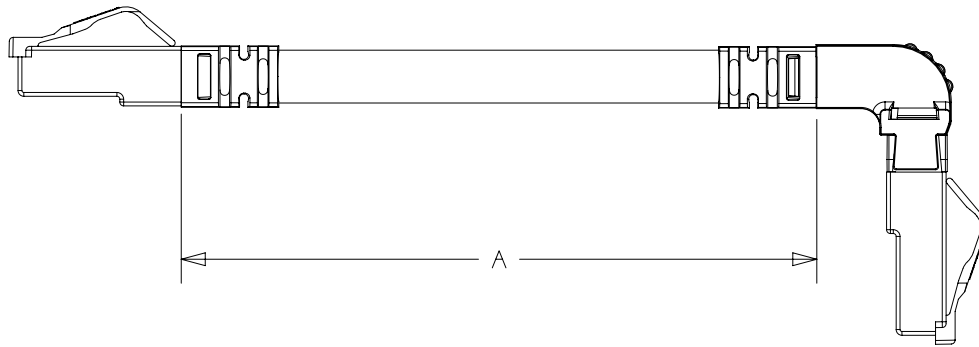

PANDUIT P/N	"A"
VS-AVT-CABLE-02	2 FT
VS-AVT-CABLE-04	4 FT
VS-AVT-CABLE-08	8 FT
VS-AVT-CABLE-16	16 FT
VS-AVT-CABLE-20	20 FT
VS-AVT-CABLE-30	30 FT

NOTES:

1. AVT DEVICE SYSTEM CABLE PROVIDES POWER AND SIGNAL BETWEEN THE INDICATOR MODULE AND THE VDD ISOLATION MODULE.
2. THIS CABLE SHOULD NOT BE USED FOR ETHERNET COMMUNICATION.
3. SEE PRICE LIST FOR CURRENT PRICE AND ORDERING INFORMATION.

PRODUCT SPEC	PACKAGING SPEC
PART NUMBER SEE TABLE	WORK INSTRUCTION
INSPECTION INSTRUCTION NUMBER	FMEA & CONTROL PLAN NUMBER

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
1	10/2/17	DFA	CLW	MSAD	ADDED 4, 16, 20 AND 30 FT CABLES TO TABLE	GAECN05158
0	5/25/17	DFA	CLW	MSAD	INITIAL RELEASE	GAECN05094

TITLE
AVT SYSTEM CABLE
CUSTOMER DRAWING

ITEM REVISION NAME
14I216AR/06

DATASET FILE NAME
14I216AR_DC/06

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE: IN [mm]
.x ± .1 [2.54] .xxx ± .005 [.127]
.xx ± .01 [.25] ANGLES ± 5 °

PANDUIT

MATERIAL:
RoHS COMPLIANT

DRAWING NUMBER:
14I216AR_DC

THIRD ANGLE PROJECTION

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY DFA	DATE 5/25/17	CHK MSAD	SCALE NONE	SHT 1 OF 1	SIZE A
-----	------	----	-----	-----	-------------	-----	------------------------	------------------------	--------------------	----------------------	------------	------------------

D10100DA/20