


LOC		DIST		P		F		ZONE		LTR		REVISIONS		DATE	APPD	
DF	SO												DESCRIPTION			
													REV PER 063D-0222-03	CT	1-04	DE

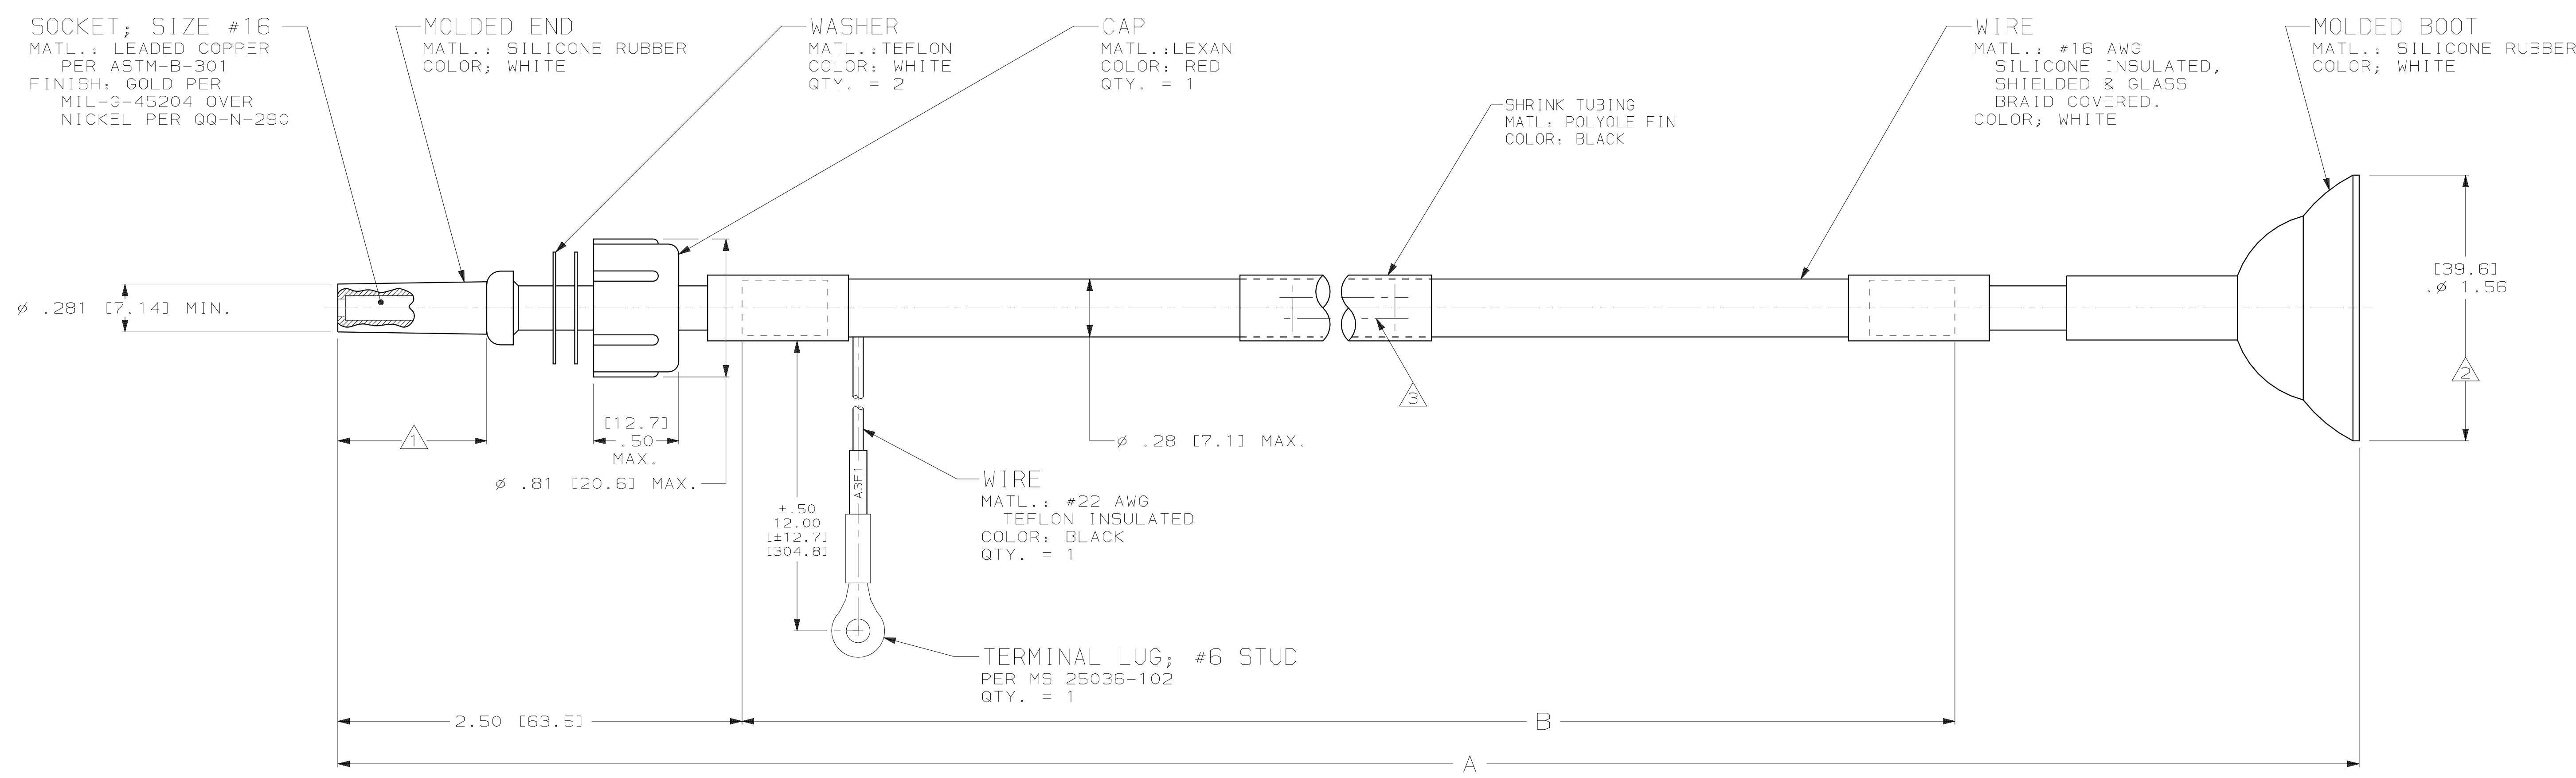

REV	DESCRIPTION	DATE	BY	CHK	APPD	NAME
13973-841416-3 REV --		42.00 ±.25 [1066.8 ± 6.4]	47.00 ±.50 [1193.8 ± 12.7]			
OBsolete		26.00 ±.25 [660.4 ± 6.4]	31.00 ±.50 [787.4 ± 12.7]			
	CUST. PART NO.	B	A			PART NO.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm] TOLERANCES ON:	DR W. LEUFERT 12-4-90	AMP INCORPORATED Harrisburg, Pa. 17105
2 PLC DEC ± .01 [0.25]	CHK D. EABY 2-27-91	
3 PLC DEC ± .005 [0.13]	APPD D. EABY 2-27-91	
ANGLES ± -	APPD D. EABY 2-27-91	
MATERIAL	APPD D. EABY 2-27-91	NAME
SEE CALLOUTS	PRODUCT SPEC	LEAD ASSEMBLY, LGH-1 CRT BASE W/J1-21 CONTACT
FINISH	APPLICATION SPEC	SIZE
SEE CALLOUTS		D 00779
	WEIGHT	CAGE CODE
		00779
		DRAWING NO
		447671
		SCALE
		2:1
		SHEET
		1 of 1

- 1 TO MATE WITH AMP LGH-1 RCPT. WITH .88 [22.4] BARREL DEPTH.
- 2 TO MATE WITH J1-21 TYPE TERMINAL.
- 3 MARKED PER MIL-STD-130 INCLUDING CUSTOMER PART NO. (SEE TABLE).
- 4. OPERATING CONDITIONS: 20KVDC, SEA LEVEL TO +70,000 FEET, [21.3 KM] -55°C TO +125°C.