


# Technical Data Sheet

# Rosenberger

Long-wipe  
SMP

RIGHT ANGLE PLUG PCB  
LIMITED DETENT

**17S202-40ML5**

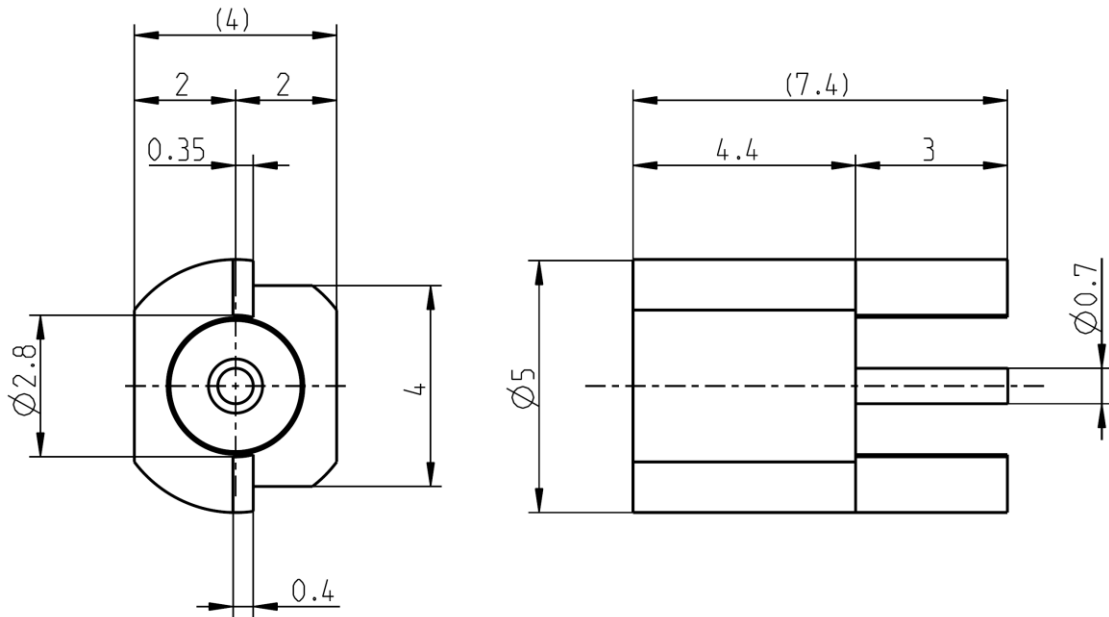

All dimensions are in mm; tolerances acc. ISO 2768 m-H

### Interface

Related to  
According to

MIL-STD-348A, Fig. 326  
Rosenberger 17S000-000

### Documents

PCB layout  
Tape & reel packaging

B 125  
VG03.01M00

### Material and plating

#### Connector parts

Center contact  
Outer contact  
Dielectric

#### Material

Brass  
Brass  
PTFE

#### Plating

AuroDur®, gold plated  
AuroDur®, gold plated

# Technical Data Sheet

# Rosenberger

Long-wipe  
SMP

RIGHT ANGLE PLUG PCB  
LIMITED DETENT

## 17S202-40ML5

### Electrical data

Impedance	50 Ω
Frequency	DC to 6 GHz
Return loss	≥ 28 dB, DC to 3 GHz ≥ 23 dB, 3 to 6 GHz
Insertion loss	≤ 0.1 x $\sqrt{f(\text{GHz})}$ dB
Insulation resistance	≥ 5 GΩ
Center contact resistance	≤ 6.0 mΩ
Outer contact resistance	≤ 2.0 mΩ
Test voltage	500 V rms
Working voltage	335 V rms (sea level)

- VSWR in application depends decisive on PCB layout -

### Mechanical data

Mating cycles	≥ 500
Center contact captivation:	≥ 7 N
Engagement force	
- smooth bore	9 N max.
Disengagement force	
- smooth bore	2.2 N min.

### Environmental data

Temperature range	-65°C to +155°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Shock	MIL-STD-202, Method 213, Condition A
Moisture resistance	MIL-STD-202, Method 106
Max. soldering temperature	IEC 61760-1, +260°C for 10 sec.
RoHS	compliant

### Tooling

N/A

### Suitable cables

N/A

### Weight

Weight 0.40 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

For the installation of the electrotechnical equipment, particular electrotechnical expertise is required.



Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
S_Mühlbacher	15/11/11	Chr. Janßen	14.10.20	c00	20-1927	S. Huber-Siegl	14.10.20

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany <a href="http://www.rosenberger.de">www.rosenberger.de</a>	Tel. : +49 8684 18-0 Email : <a href="mailto:info@rosenberger.de">info@rosenberger.de</a>	Page 2 / 2
--	--	---------------