953122-4 - ACTIVE

MQS

TE Internal #: 953122-4 Automotive Connector Caps & Covers, Cover Assembly, Cable Exit Angle 15°, Blue, PBT GF, 40 Position, -40 – 212 °F [-40 – 100 °C], MQS

View on TE.com >





Protection & Strain Relief Accessory Type: Cover Assembly

Cable Exit Angle: 15°

Strain Relief: Without

Primary Product Color: Blue

Primary Product Material: **PBT GF**

Features

Product Type Features

Protection & Strain Relief Accessory Type

Configuration Features

Number of Positions

connectivity

40

Cover Assembly

Body Features

Cable Exit Angle	15°
Primary Product Color	Blue
Primary Product Material	PBT GF
Mechanical Attachment	
Strain Relief	Without
Usage Conditions	
Operating Temperature (Max)	100 °C[212 °F]
Operating Temperature Range	-40 – 100 °C[-40 – 212 °F]
Packaging Features	
Packaging Quantity	180
Packaging Method	Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

953122-4

Automotive Connector Caps & Covers, Cover Assembly, Cable Exit Angle 15°, Blue, PBT GF, 40 Position, -40 – 212 °F [-40 – 100 °C], MQS



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series | MQS

953122-4

Automotive Connector Caps & Covers, Cover Assembly, Cable Exit Angle 15°, Blue, PBT GF, 40 Position, -40 – 212 °F [-40 – 100 °C], MQS




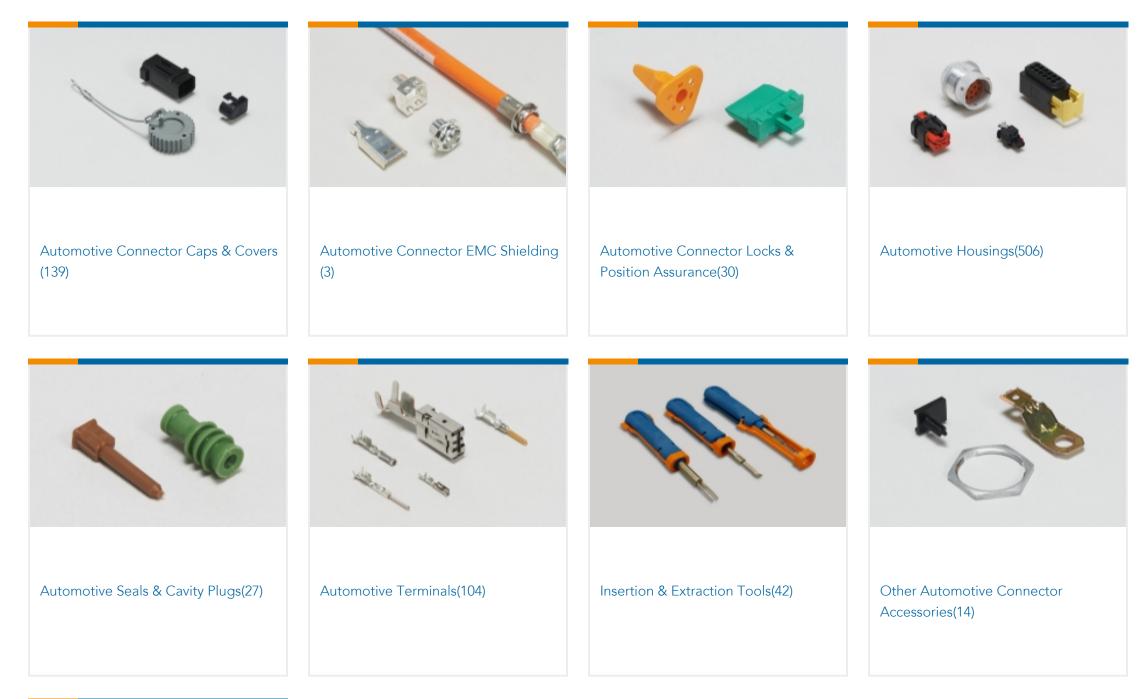



PCB Headers & Receptacles(214)


Customers Also Bought

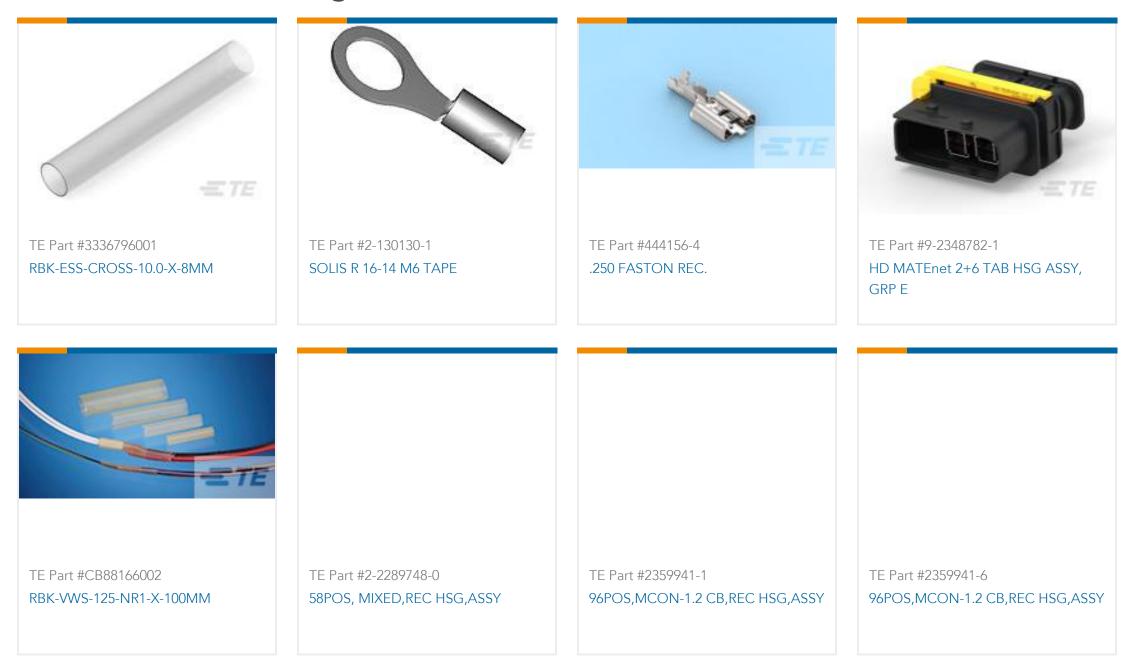

953122-4

Automotive Connector Caps & Covers, Cover Assembly, Cable Exit Angle 15°, Blue, PBT GF, 40 Position, -40 – 212 °F [-40 – 100 °C], MQS



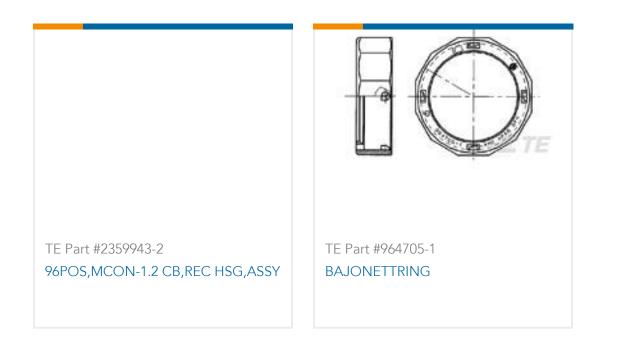

Documents

Product Drawings 40W MQS COVER ASSY (15d)

English

CAD Files

Customer View Model

ENG_CVM_953122-4_O.3d_igs.zip

English

Customer View Model

ENG_CVM_953122-4_O.3d_stp.zip

English

Customer View Model

ENG_CVM_953122-4_O.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications Product Specification

French

Instruction Sheets

Instruction Sheet (non U.S.)

French