



UNIT:mm

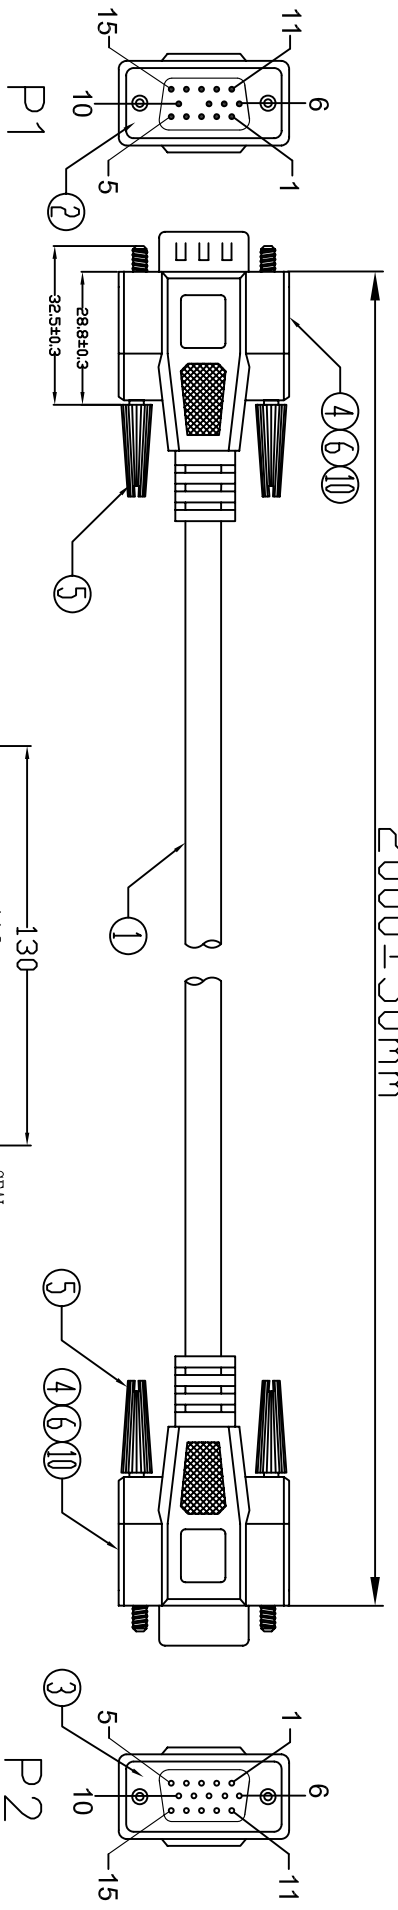

Electronic Test:
 1. 100% Test,(Open,Short,Miss Wire)
 2. Contact Resistance:3 ohm max.
 3. Insulation Resistance:5M ohm min.
 4. Hi-Pot:300V DC/10ms

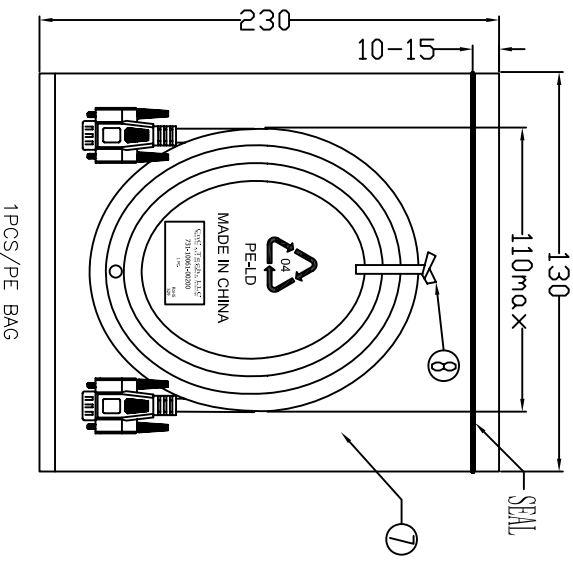

PIN ASSIGNMENT	
P1 1	white
P1 2	grey
P1 3	yellow
P1 4	pink
P1 5	orange
P1 6	red
P1 7	brown
P1 8	green
P1 10	blue
P1 11	purple
P1 12	light green
P1 13	light blue
P1 14	black
P1 15	white/black
Shell	drain

⑩	TUBE	2	HEAT SHRINK TUBE BLACK OD:1.5* $L=15MM$
⑨	PE BAG	1/10	CLEAR SIZE:280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
⑧	TIE	1	WHITE $L=120mm$
⑦	PE BAG	1	CLEAR SIZE:130*230*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
⑥	COOPER FOL	2	DOUBLE-SIDED CONDUCTIVE COPPER FOL 180" $W25mm*1.55mm$
⑤	SCREW	4	SCREW:#4-40UNC L47mm,NICKEL PLATED,INSULATION COLOR BEIGE(V-29)
④	OUT JACKET	43.5g	BEIGE(V-29) 40P PVC(MOULD NO:MM-113)
③	IN JACKET	8g	CLEAR LDPE(MOULD NO:MM-049)
②	CONN	1	HD15P FEMALE,PIN G/F,SHELL-NICKEL,INSULATION COLOR:BLUE. SOLDER TYPE.
①	CABLE	1	NOUL 28AWG(7/0.12T0)*14C+AL/MR+DW(7/0.12 TC) OUTER JACKET COROL:BEIGE(V-29) OD:6.0±0.15mm. L=2000±20mm.

Cnc Tech, LLC
 Industrial Cable and Connector Technology

DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	731-10061-00200
DECIDE BY		DATE	2012-02-15
VERSIONS/EDITION	A/0	PRODUCTION	

4 3 2 1 4 3 2 1