


FCI PART NO.	LENGTH
10129387-P0033YYLF	330±2

WIRING LIST	
CN1	CN2
1	1
2	2
3	3
⋮	⋮
48	48
49	49
50	50

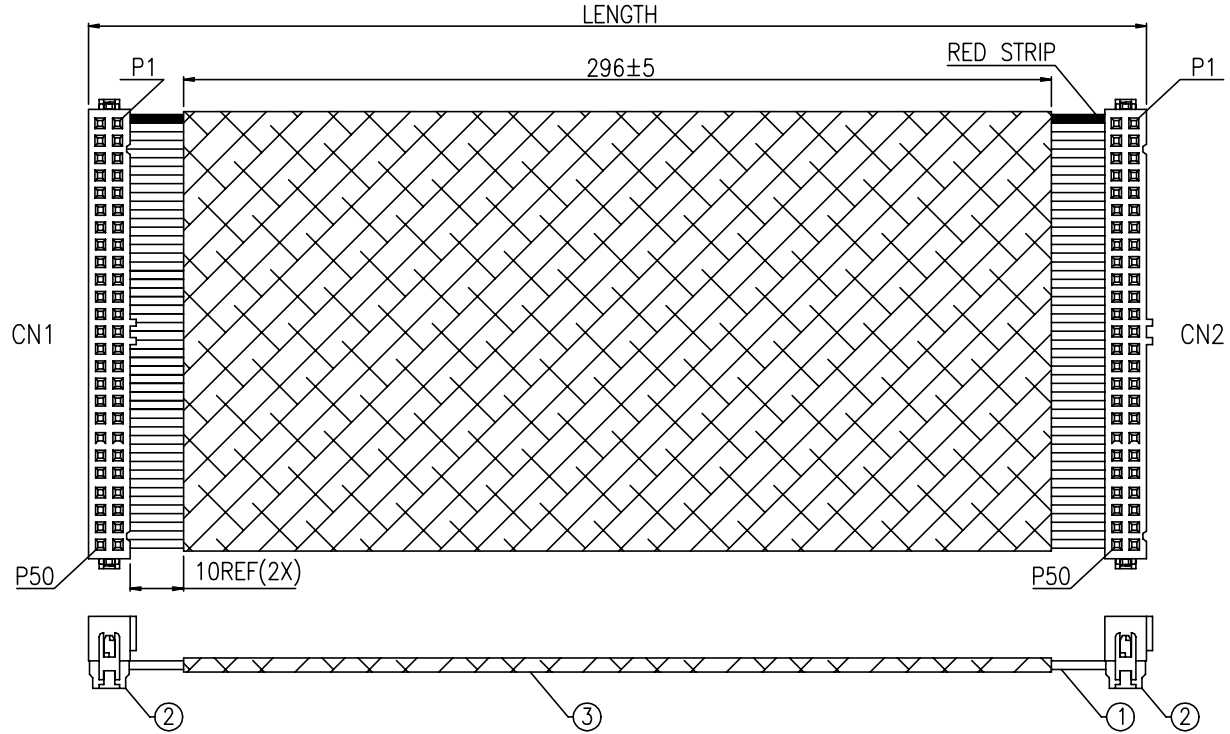

NOTES:

1. MATERIAL: SEE BOM ON SHEET 1.
2. THIS DIMENSION IS A FINISHED PRODUCT LENGTH.
3. ALL CABLE ASSEMBLIES SHALL BE TESTED 100% FOR CONTINUITY AS DEFINED IN WIRING LIST.
4. UNLESS OTHERWISE SPECIFIED ALL CABLE ASSEMBLIES SHALL BE TESTED:  
 HI-POT: DC 300V/10ms  
 DIELECTRIC RESISTANCE: 10M Ohms MIN.  
 CONNECTION RESISTANCE: 3 Ohms MAX.
5. LEAD FREE PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

A/R	M	TUBE: OD=40mm, FIBERGLASS PIPE, BLACK	3
2	EA	IDC CONN: 2.54PITCH 2*25PIN, 0.76um Au, WITH CENTRAL KEY AND WITHOUT STRAIN RELIEF, FCI P/N:71600-150LF	2
A/R	M	FLAT CABLE: 1.27PITCH 28AWG*50C, UL2651, COLOR:GRAY	1
Q'TY	UNIT	DESCRIPTION	ITEM

spec ref	See Notes			dr	Carl Wang	2014-12-30	projection	MM	size	A3	scale	N/A	
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Carl Wang	2014-12-30			ecn no		rel level		
surface	linear	0.X	±	chr	Guo-Feng Jin	2014-12-30			product family		rel level		
		0.XX	±	appr	Guo-Feng Jin	2014-12-30			product family		rel level		
		0.XXX	±				title		10129387		rev	A	
		angular	0°	±*	www.fci.com			cat. no.		Product - Customer Drw		sheet 1 of 1	

