



THIS IS A C.A.D. GENERATED DRAWING  
DO NOT MAKE MANUAL REVISIONS TO MASTER.



\* UNLESS OTHERWISE SPECIFIED TOLERANCES  
ON DECIMAL IS: ANGLE ± 1°  
.XX ± 0.35  
UNIT: MM

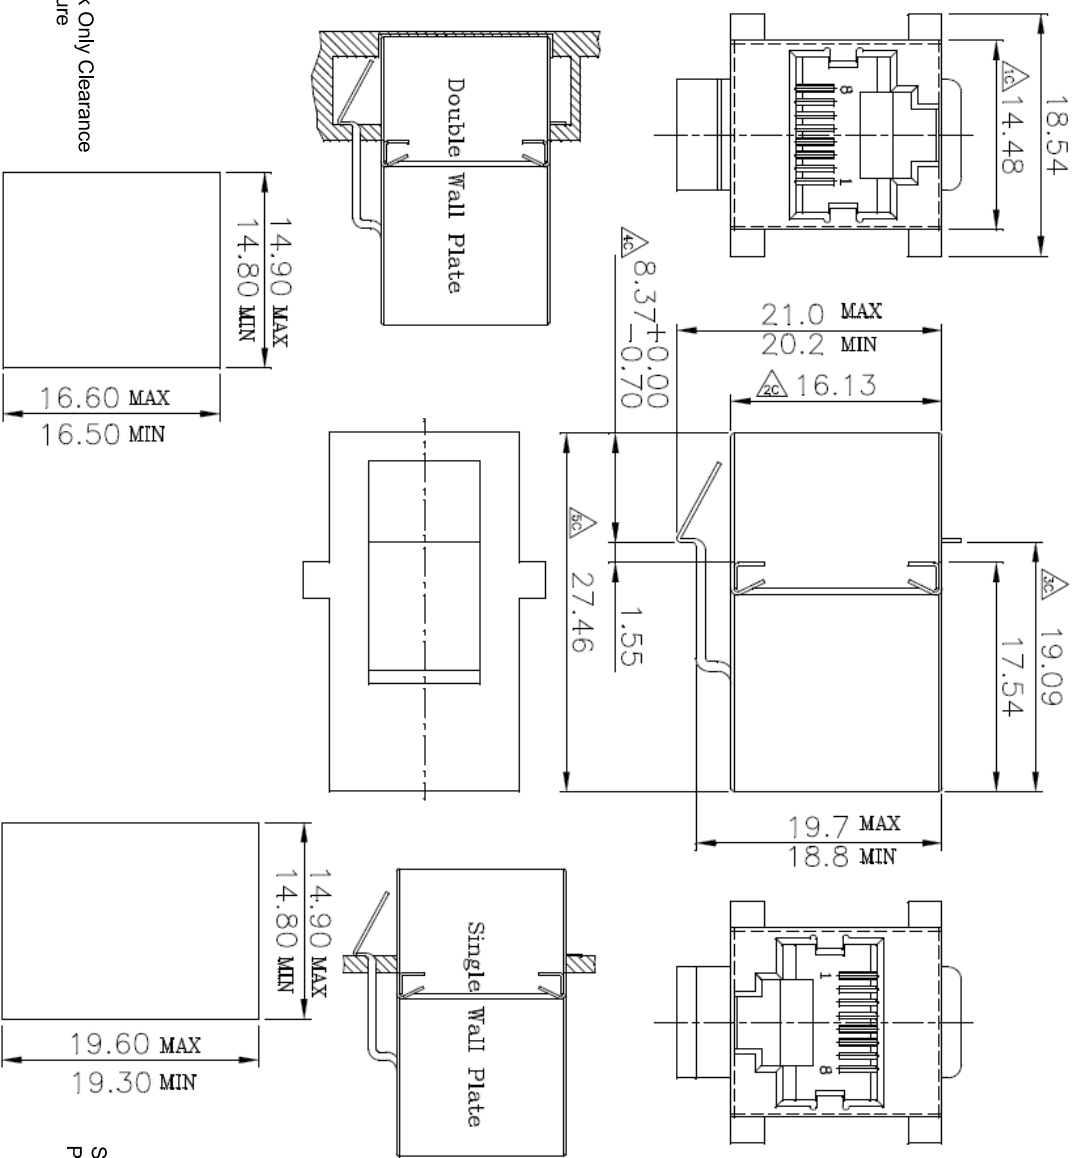

Front Panel Jack Only Clearance  
W/O Latch Feature

Single Panel - Latch Clearance  
Panel Thickness 0.062 inch

Electrical:  
Contact current rating: 1.5AMPS  
Dielectric withstanding voltage: 500VAC  
Insulation resistance: 1000 MegOhms Min.  
Contact resistance: 30 MilliOhms Max  
Operating temperature: -55 °C to +85°C

Materials:  
Contacts: Phosphor bronze  
Insulator: Thermoplastic UL 94V-0  
Shell: Stainless steel  
Gold plating: 6 microinch

THESE DRAWINGS AND SPECIFICATIONS ARE THE  
PROPERTY OF MH CONNECTORS LTD. AND SHALL NOT  
BE REPRODUCED, COPIED OR USED AS THE BASIS FOR  
THE MANUFACTURE OR SALE OF APPARATUS WITHOUT  
WRITTEN PERMISSION.

DRAWN	DATE
JDHNNY	08-21-12
APPROVED	DATE



THIS SERIES FULLY CONFORMS TO THE  
EUROPEAN UNION DIRECTIVES 2002/95/EC  
AND 2002/96/EC FOR ROHS COMPLIANCY.



MH CONNECTORS LTD.

SCALE	SHEET	OF	REV:
1:1	1	DF 1	A
DRAWING No		MH3101S-8821	