


Data sheet

chainflex® CFROBOT3



Data cable (Class 6.1.3.3) ● For torsion applications ● PUR outer jacket ● Shielded ● Oil-resistant and coolant-resistant ● Flame retardant ● Notch-resistant ● Hydrolysis and microbe-resistant

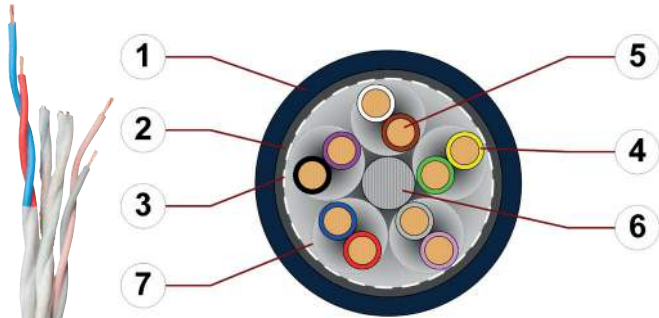

1. Outer jacket: Pressure extruded PUR mixture
2. Overall shield: Extremely torsion-resistant wrapping made of tinned copper wires
3. Banding: Plastic fleece
4. Core insulation: Mechanically high-quality TPE mixture
5. Conductor: Fine-wire strand in especially bending-stable version consisting of bare copper wires
6. Strain relief: Tensile stress-resistant centre element
7. Core structure: Paare mit optimierter Schlaglänge und -richtung







Example image
For detailed overview please see design table



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Cable structure

	Conductor	Stranded conductor in especially bending-resistant version consisting of bare copper wires (following DIN EN 60228).
	Core insulation	Mechanically high-quality TPE mixture.
	Core structure	Cores twisted in pairs with a short pitch length, core pairs then wound with short pitch lengths.
	Core identification	Colour code in accordance with DIN 47100.
	Overall shield	Extremely torsion-resistant tinned wound copper shield. Coverage optical approx. 85 %
	Outer jacket	Low-adhesion, halogen-free, highly abrasion resistant PUR mixture, adapted to suit the requirements in e-chains® (following DIN EN 50363-10-2) Colour: Steel-blue (similar to RAL 5011) Printing: white

„00000 m** igus chainflex CFROBOT3.--.02① ---② E310776 cAUus
AWM Style 20911 VW-1 AWM I/II A/B 80°C 300V FT1 EAC CE UKCA
RoHS-II conform www.igus.de +++ chainflex cable works +++

* **Length printing:** Not calibrated. Only intended as an orientation aid.
① / ② Cable identification according to Part No. (see technical table).
Example: ... chainflex CFROBOT3.05.05.02 (5x(2x0.5))C ...

Example image

Data sheet

chainflex® CFROBOT3



Data cable (Class 6.1.3.3) ● For torsion applications ● PUR outer jacket ● Shielded ● Oil-resistant and coolant-resistant ● Flame retardant ● Notch-resistant ● Hydrolysis and microbe-resistant

Dynamic information

	Bend radius	e-chain® twisted	min. 10 x d
		flexible	min. 8 x d
		fixed	min. 5 x d
	Temperature	e-chain® twisted	-25 °C up to +80 °C
		flexible	-40 °C up to +80 °C (following DIN EN 60811-504)
		fixed	-50 °C up to +80 °C (following DIN EN 50305)
	v max.	twisted	180 °/s
		a max.	twisted
	Travel distance	Robots and 3D movements, Class 1	

These values are based on specific applications or tests. They do not represent the limit of what is technically feasible.


Guaranteed service life according to guarantee conditions

Cycles	5 million	7.5 million	10 million
Temperature, from/to [°C]	Torsion max. [°/m]	Torsion max. [°/m]	Torsion max. [°/m]
-25/-15	±150	±90	±30
-15/+70	±180	±120	±60
+70/+80	±150	±90	±30

Minimum guaranteed service life of the cable under the specified conditions.
The installation of the cable is recommended within the middle temperature range.

Electrical information

	Nominal voltage	300/500 V (following DIN VDE 0298-3) 300 V (following UL)
	Testing voltage	2000 V (following DIN EN 50395)



Example image

Data sheet

chainflex® CFROBOT3



Data cable (Class 6.1.3.3) ● For torsion applications ● PUR outer jacket ● Shielded ● Oil-resistant and coolant-resistant ● Flame retardant ● Notch-resistant ● Hydrolysis and microbe-resistant




Properties and approvals

-  **UV resistance** High
-  **Oil resistance** Oil-resistant (following DIN EN 50363-10-2), Class 3
-  **Flame retardant** According to IEC 60332-1-2, Cable Flame, VW-1, FT1, FT2 / Horizontal Flame
-  **Silicone-free** Free from silicone which can affect paint adhesion (following PV 3.10.7 – status 1992)
-  **UL verified** Certificate No. B129699: „igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year“
-  **UL/CSA AWM** See table UL/CSA AWM for details
-  **NFPA** Following NFPA 79-2018, chapter 12.9
-  **EAC** Certificate No. RU C-DE.ME77.B.00300/19 (TR ZU)
-  **REACH** In accordance with regulation (EC) No. 1907/2006 (REACH)
-  **Lead-free** Following 2011/65/EC (RoHS-II/RoHS-III)
-  **Cleanroom** According to ISO Class 1. The outer jacket material of this series complies with CF77. UL.05.12.D - tested by IPA according to standard DIN EN ISO 14644-1
-  **CE** Following 2014/35/EU
-  **UKCA** In accordance with the valid regulations of the United Kingdom (as at 08/2021)

Properties and approvals

UL/CSA AWM Details

Conductor nominal cross section [mm ²]	Number of cores	UL style core insulation	UL style outer jacket	UL Voltage Rating [V]	UL Temperature Rating [°C]
0.25	8-16	10497	20911	300	80
0.5	10	10497	20911	300	80



Example image

Data sheet


chainflex® CFROBOT3



Data cable (Class 6.1.3.3) ● For torsion applications ● PUR outer jacket ● Shielded ● Oil-resistant and coolant-resistant ● Flame retardant ● Notch-resistant ● Hydrolysis and microbe-resistant


Typical lab test setup for this cable series

Test bend radius R	approx. 100 - 125 mm
Test travel S/S ₂	approx. 1 - 12 m
Test duration	minimum 1.5 - 3 million double strokes
Test speed	approx. 0.5 m/s
Test acceleration	approx. 1.5 m/s ²

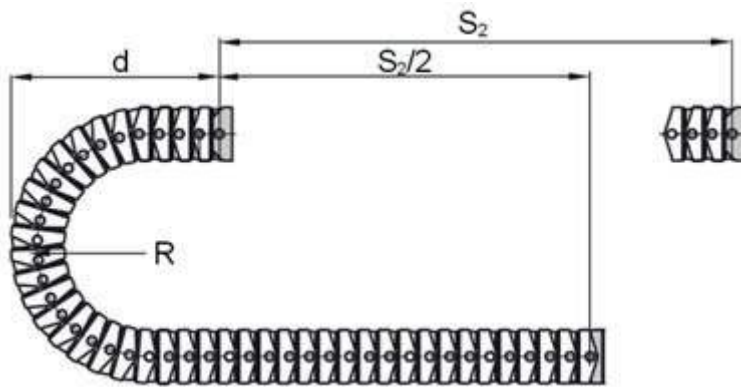

Typical lab test setup (torsion) for this cable series

Torsion range T	±180°/m
Length 3D e-chain®	1 m
Test duration (torsion)	minimum 3 - 5 million cycles
Test speed (torsion)	approx. 80 - 120 °/s
Test acceleration (torsion)	approx. 40°/s ²

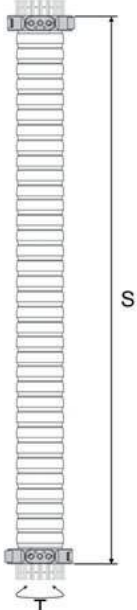

Example image



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Data sheet

chainflex® CFROBOT3



Data cable (Class 6.1.3.3) ● For torsion applications ● PUR outer jacket ● Shielded ● Oil-resistant and coolant-resistant ● Flame retardant ● Notch-resistant ● Hydrolysis and microbe-resistant

Typical application areas

- For heaviest duty applications with torsion movements, Class 6
- Especially for robots and 3D movements, Class 1
- Almost unlimited resistance to oil, Class 3
- Torsion $\pm 180^\circ$, with 1m cable length, Class 3
- Indoor and outdoor applications, UV-resistant
- Robots, Handling, spindle drives

Technical tables:

Mechanical information

Part No.	Number of cores and conductor nominal cross section [mm ²]	Outer diameter (d) max. [mm]	Copper index [kg/km]	Weight [kg/km]
CFROBOT3.02.03.02	(3x(2x0.25))C	9.0	33	84
CFROBOT3.02.04.02	(4x(2x0.25))C	10.5	38	103
CFROBOT3.02.06.02	(6x(2x0.25))C	11.5	52	127
CFROBOT3.02.08.02	(8x(2x0.25))C	13.5	66	170
CFROBOT3.05.05.02	(5x(2x0.5))C	12.5	80	170

Note: The given outer diameters are maximum values and may tend toward lower tolerance limits.
G = with green-yellow earth core **x** = without earth core

Electrical information

Conductor nominal cross section [mm ²]	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2) [Ω/km]	Maximum current rating at 30 °C [A]
0.25	78.0	5
0.5	39.0	10

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.



Example image



Data sheet

chainflex® CFROBOT3



Data cable (Class 6.1.3.3) ● For torsion applications ● PUR outer jacket ● Shielded ● Oil-resistant and coolant-resistant ● Flame retardant ● Notch-resistant ● Hydrolysis and microbe-resistant

Design table

Part No.	Number of cores	Core design
CFROBOT3.XX.03.02	3x2	
CFROBOT3.XX.04.02	4x2	
CFROBOT3.XX.05.02	5x2	
CFROBOT3.XX.06.02	6x2	
CFROBOT3.XX.08.02	8x2	



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Example image

Data sheet

chainflex® CFROBOT3



Data cable (Class 6.1.3.3) ● For torsion applications ● PUR outer jacket ● Shielded ● Oil-resistant and coolant-resistant ● Flame retardant ● Notch-resistant ● Hydrolysis and microbe-resistant

Colour code in accordance with DIN 47100

Conductor no.	Colours according to DIN ISO 47100	Conductor no.	Colours according to DIN ISO 47100
1	white	19	white-pink
2	brown	20	pink-brown
3	green	21	white-blue
4	yellow	22	brown-blue
5	grey	23	white-red
6	pink	24	brown-red
7	blue	25	white-black
8	red	26	brown-black
9	black	27	grey-green
10	violet	28	yellow-grey
11	grey-pink	29	pink-green
12	red-blue	30	yellow-pink
13	white-green	31	green-blue
14	brown-green	32	yellow-blue
15	white-yellow	33	green-red
16	yellow-brown	34	yellow-red
17	white-grey	35	green-black
18	grey-brown	36	yellow-black



Example image

