
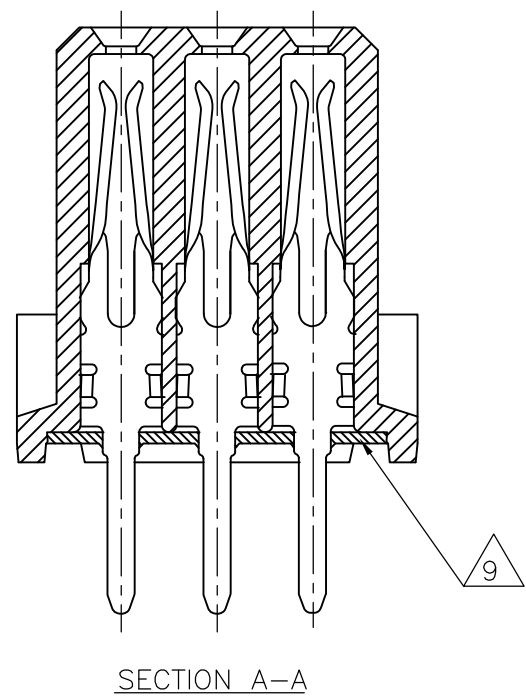
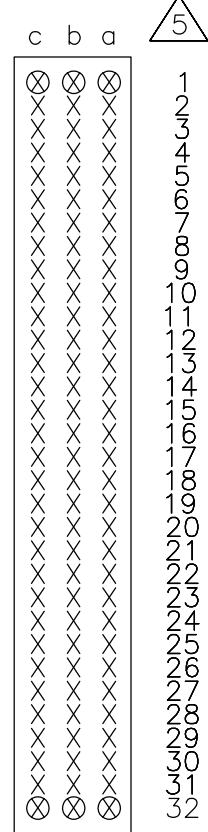


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
H	-	J	ECR-07-020965	23-08-08	AEG MKO
		J1	REVISED PER ECO-09-020935	31AUG09	KK AEG
		J2	ECR-11-008320	18NOV11	RK MKO

- NOTES:
- 1 CONNECTOR MEETS THE REQUIREMENTS ACC. DIN 41612, PART 5.
 - 2 MATERIAL CONTACT: PHOSPHORBRONZE. MATERIAL HOUSING: GLASSFILLED THERM. POLYESTER. COLOR:GREY
 - 3 AT CONTACTAREA 1,25µm GOLD OVER 1,25µm NICKEL AT SOLDER POST AREA 1,25µm TIN.
 - 4 AT CONTACTAREA 0,8µm GOLD OVER 1,25µm NICKEL AT SOLDER POST AREA 1,25µm TIN.
 - 5 CONTACT ARRANGEMENTS; AN AN ASTERISK " X " DENOTES A SIGNAL CONTACT. AN ASTERISK " ⊗ " DENOTES A KINKED SIGNAL CONTACT.
 - 6 AT CONTACTAREA 0,4µm GOLD OVER 1,25µm NICKEL AT SOLDER POST AREA 1,25µm TIN.
 - 7 CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE ON OUTSIDE OF MATING AREA AT SIDE OF ROW c.
 - 8 SOLDER POSTS SUITABLE FOR 1,0 NOM. P.C.B. HOLES.
 - 9 FLUX RESISTANCE STRIP.
 - 10 KINKED POSTS.
 - 11 AT CONTACTAREA 0,1µm GOLD OVER 0,7µm PALLADIUM (DURAGOLD) OVER 1,25µm NICKEL, AT SOLDERPOST AREA 1,25µm TIN.
 - 12 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

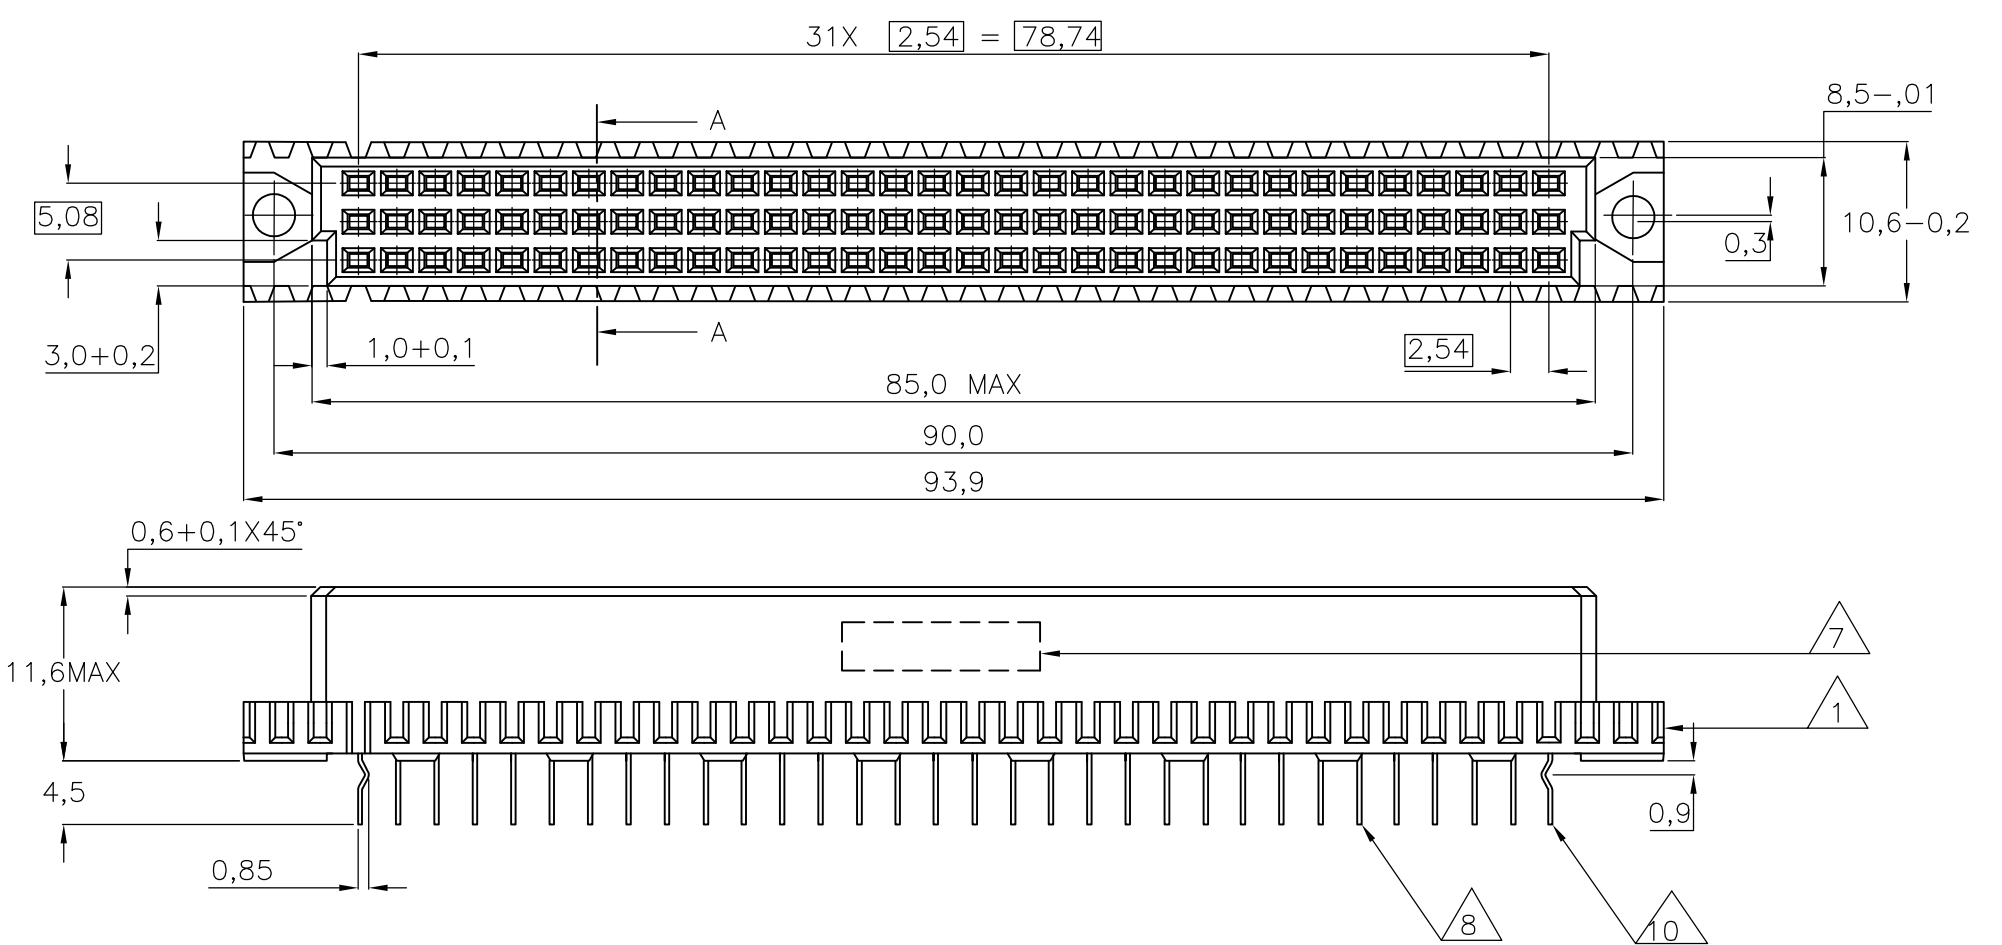

	WITH	WITHOUT	1	2	7-216195-4
OBSOLETE	WITH	WITHOUT	1	2	7-216195-4
OBSOLETE	WITH	WITH	1	2	6-216195-4
OBSOLETE	WITH	WITHOUT	4	2	1-216195-4
OBSOLETE	WITH	WITH	6	2	216195-8
SUPERSEDED BY 2173047-4	WITH	WITH	4	2	216195-4
OBSOLETE	WITH	WITH	3	2	216195-1
	10	9	3	2	
			FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN J.V.LIEMPT. 19JUN91
 CHK J.GIBBELS
 APVD - NAME

STE TE Connectivity

96 POS C FEMALE B.T.B. CONN.
 ACC. DIN 41612 WITH SOLDER POSTS
 FOR 2,4 OR 3,2 mm. P.C.BOARD THK'S.

DIMENSIONS: mm TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ± -
 1 PLC ± -
 2 PLC ± -
 3 PLC ± -
 4 PLC ± -
 ANGLES ± -
 MATERIAL - FINISH -

PRODUCT SPEC -
 APPLICATION SPEC -
 WEIGHT -

SIZE A3 CAGE CODE 00779 DRAWING NO C-216195 RESTRICTED TO -
 CUSTOMER DRAWING SCALE NTS SHEET 1 OF 1 REV J2