


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - TE Connectivity ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
	A	GO TO PRODUCTION	09JUN2020	DC AC

NOTES:

1. MATERIALS : REFER TO TABLE.
2. PACKAGING : SINGULARATE PARTS TO BE SECURELY BAG WRAPPED, BAGGED OR VACUM PACKAGE INBULK
3. CONSULT TE CONNECTIVITY DATASHEET DS 2195729
4. Frequency:600MHz-6GHz Operation
5. Impedance:50 ohm
6. Polarization:LINEAR
7. OPERATING/STORAGE TEMPERATURE -20°C to +65°C

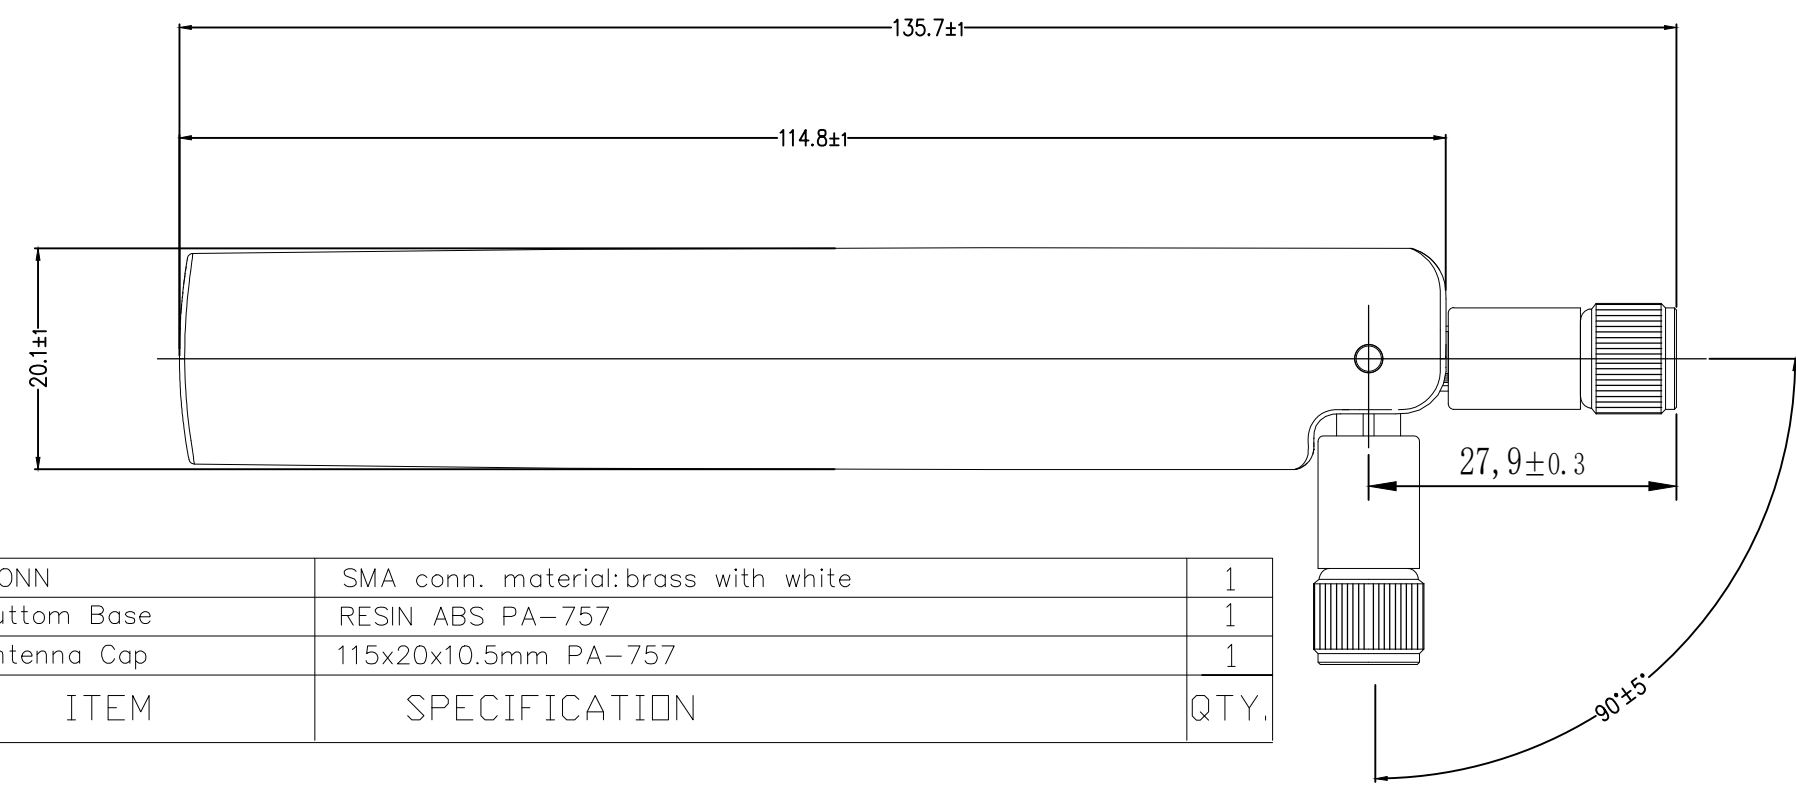

NO.	ITEM	SPECIFICATION	QTY.
3	CONN	SMA conn. material:brass with white	1
2	Buttom Base	RESIN ABS PA-757	1
1	Antenna Cap	115x20x10.5mm PA-757	1

TE PN	2195729-1	2195729-2
ENCLOSURE COLOR	BLACK	WHITE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DC HSIANG 31MAR2020	STE TE Connectivity	
DIMENSIONS: mm		CHK SHIN HOO 31MAR2020		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD AMOS CHEAH 31MAR2020	NAME	
0 PLC ± -		PRODUCT SPEC	EXTERNAL FULL BAND ANTENNA	
1 PLC ± -		APPLICATION SPEC	-	
2 PLC ± -		WEIGHT 0	SIZE A3	CAGE CODE 00779
3 PLC ± -		FINISH -	DRAWING NO	RESTRICTED TO
4 PLC ± -			C-2195729	-
ANGLES ± -		CUSTOMER DRAWING	SCALE 1:1	SHEET 1 OF 1
MATERIAL -		REV A		