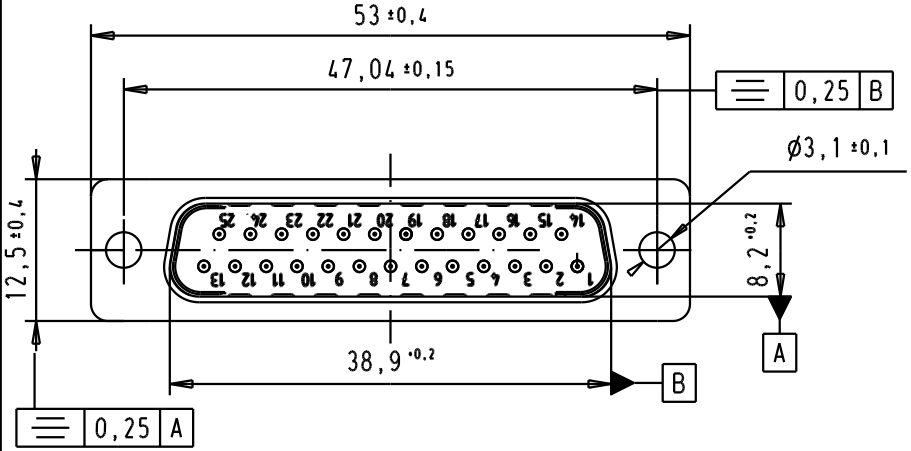



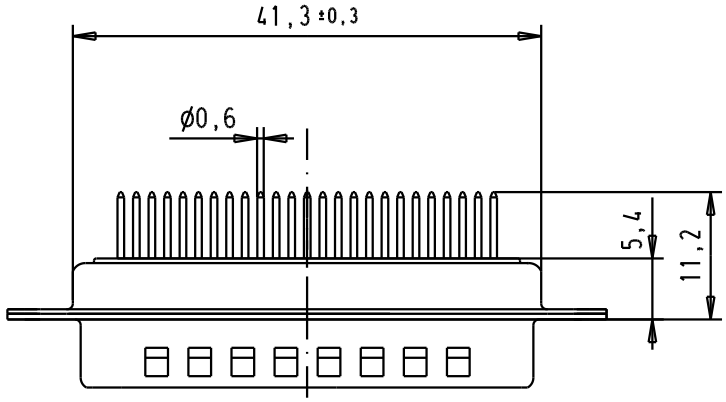

PCB Layout, Component side

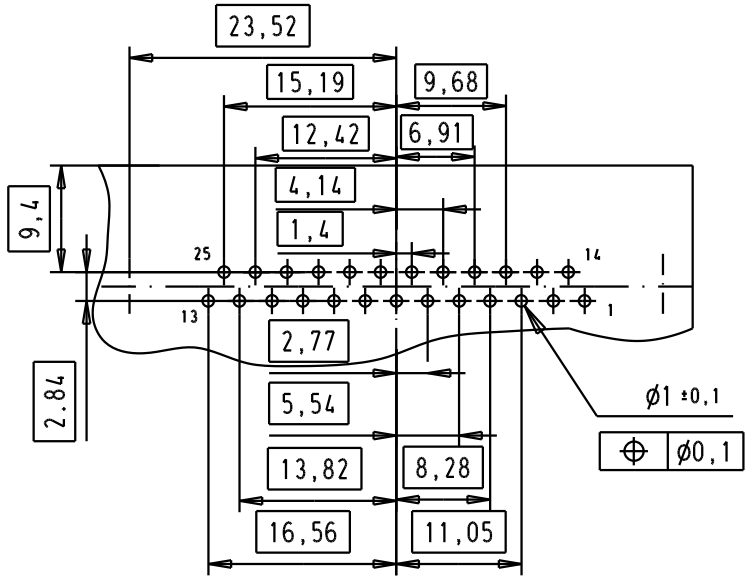

SPECIFICATION

Mating Cycles	500
Filter type	C
Capacitance	470pf ±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	-
10	1dB
50	10dB
100	15dB
500	35dB
1000	32dB

				Dat.	Name
			Detail.	8-JUL-02	CV
			Insp.		
			Stand.		
33423	06/02/06	JMDR			
31058	8-JUL-02	CV			
Mod.	Dat.	Name			

All Dim. in mm
Orig. Size DIN A 4

HARTING EURL
F-95972 Paris

D-Sub, male, straight, 25 Poles, turned solder pin, tin plated shell with dimples and holes

Ma?Mstab/ *Scale* 1.5:1

TB 09643227220

Sub.

Blatt/ *Page* 1/1