


## RS 100 PF RS 100 OR 2000MM A.1

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

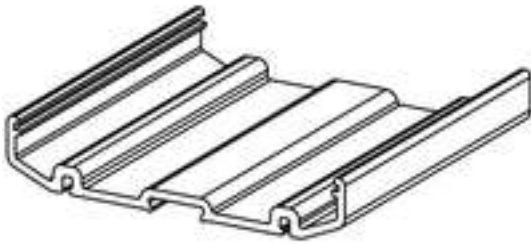

### Flexible - More flexible - Profilform

Modular housings in profile form - the flexible modular system comprising coloured and transparent plastic profiles and carrier modules

The combination of standard pitches mounted side by side in any arrangement and metre goods cut accurate to the millimetre creates the perfect balance between flexibility and economic efficiency:

- Pitch profiles with standard widths ranging from 5mm to 45mm allow the mounting of all standard PCB formats.
- Variable heights ensure maximum component density, even with larger electronics components.
- The different installation variations mean that mounting the enclosure directly is as easy as clipping components onto the terminal rail
- Solid hoods protect the module reliably from external influences

The recipe for success: variable profile + modular form components = flexible enclosure concept that offers a large surface area for the PCBs.

The modular concept is designed for modules with high space requirements and suitable for small component quantities and different widths.

### General ordering data

Type	PF RS 100 OR 2000MM A.1
Order No.	<a href="#">4144870000</a>
Version	Electronics housings, RS 100 Orange, Extruded profile, Width: 104 mm
GTIN (EAN)	4008190377410
Qty.	2 m

**RS 100  
PF RS 100 OR 2000MM A.1**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data****Dimensions and weights**

Length	2,000 mm	Length (inches)	78.74 inch
Width	104 mm	Width (inches)	4.094 inch
Height	24 mm	Height (inches)	0.945 inch
Net weight	560 g		

**System characteristics**

Version	Extruded profile	Number of PCBs per module	1
PCB thickness	1.6 mm	Tolerance for the PCB shape	±0.2
Cross-connection	No	Contact to terminal rail	No
Protection degree	IP20	Encapsulation option	No

**Material data**

Insulating material	PVC	Colour	Orange
Colour chart (similar)	RAL 2000	CTI	≥ 600
UL 94 flammability rating	V-0	Storage temperature, min.	-25 °C
Storage temperature, max.	55 °C	Max. relative humidity during storage	80 %
Operating temperature, min.	-50 °C	Operating temperature, max.	60 °C
Temperature range, installation, min.	-25 °C	Temperature range, installation, max.	60 °C

**Classifications**

ETIM 3.0	EC001284	ETIM 5.0	EC002848
ETIM 6.0	EC002779	UNSPSC	30-21-18-01
eClass 6.2	27-14-11-43	eClass 7.1	27-14-92-14
eClass 8.1	27-14-92-14	eClass 9.0	27-14-11-92
eClass 9.1	27-18-27-90		

**Notes**

## Notes

Descriptive text technical data

**3 heights are available for the cover profile and the end plates:**  
**TS mounting without cover: TS 32 = 45 mm, TS 35x7.5 = 40.5 mm**  
**TS mounting with low cover: TS 32 = 89 mm, TS 35x7.5 = 84.5 mm**  
**TS mounting with high cover: TS 32 = 121 mm, TS 35x7.5 = 116.5 mm**  
**Direct mounting, without/low/high cover: 24 / 69 / 99 mm**

**Dimensions of the PCB**  
**Thickness: 1.6 (±0.2) mm, width: 100 (+0.5) mm**  
**Dimension of RS section = PCB length - 4.5 mm**  
**Dimension of ADP section = PCB length - 1 mm**

**Example:**  
**PCB length 160 mm, RS = 155.5 mm, ADP = 159 mm**

**Approvals**

ROHS	Conform
------	---------

**Data sheet****RS 100**  
**PF RS 100 OR 2000MM A.1****Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com**Technical data****Downloads**

Brochure/Catalogue

[FL ANALO.SIGN.CONV. EN](#)  
[MB DEVICE MANUF. EN](#)  
[CAT 2 PORTFOLIOGUIDE EN](#)  
[FL MACHINE SAFETY EN](#)  
[FL 72H SAMPLE SER EN](#)  
[PO OMNIMATE EN](#)

**Data sheet**

**RS 100  
PF RS 100 OR 2000MM A.1**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

