


1. MAGNET PROPERTIES PER BIF-12:

Br: 2,450-2,650 G
 Hc: 2,140-2,640 Oe
 Hci: ≥2,640 Oe
 BH_(max): 1.4-1.6 MGOe
 T max: 120° C

2. INJECTION MOLDED WITH NYLON-12

3. CAN BE MAGNETIZED IN ANY DIRECTION

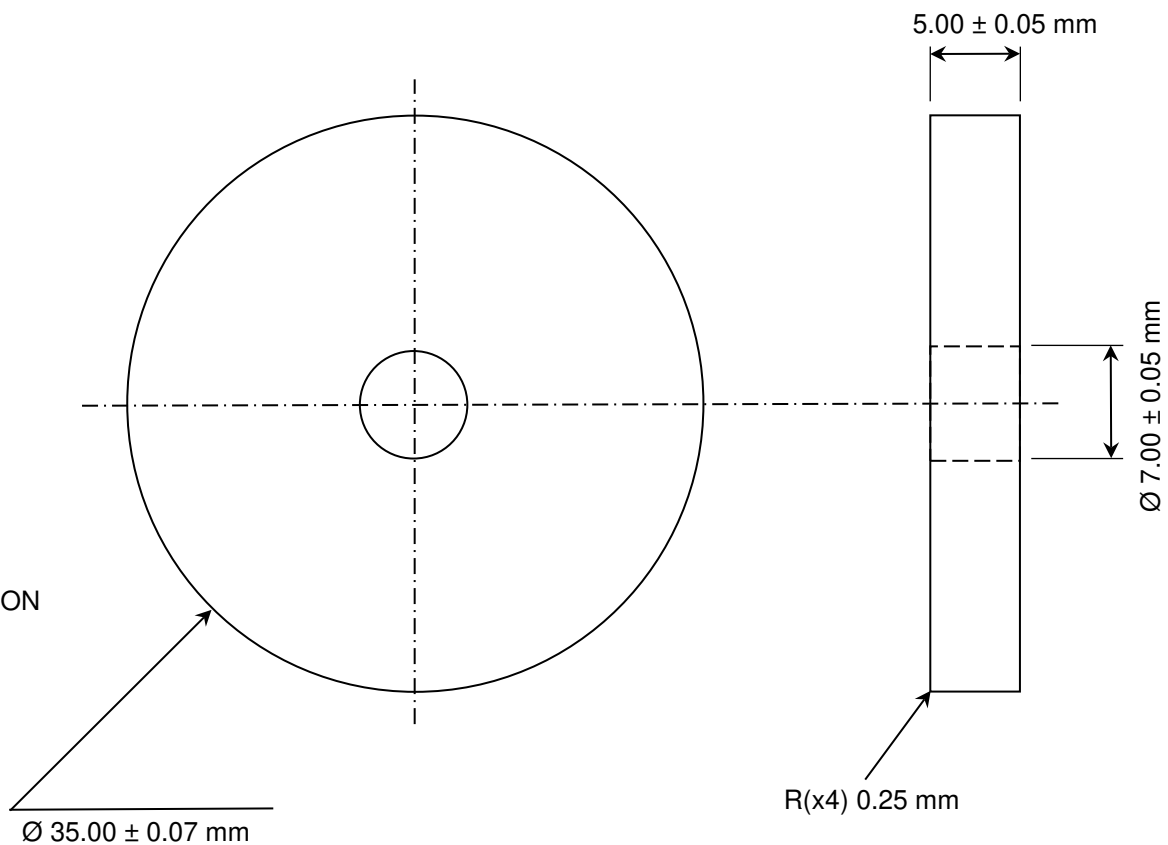

Rev	Date	By

TOLERANCES
 (UNLESS OTHERWISE NOTED)

DECIMAL	METRIC
X.XX = ± .01	X.X = ± .25
X.XXX = ± .005	X.XX = ± .13

ANGLES
 ± .5°

DO NOT SCALE DRAWING

Alliance LLC		
1450 CLARK DRIVE, VALPARAISO, INDIANA 46385		
DESCRIPTION: INJECTION MOLDED FERRITE		
P/N: YB-104-1		BONDED MAGNET
MATERIAL:	Dwg by: BT	REV LEVEL: A
COATING: NONE	Apr by: DV	Apr. Dated: 03-14-2020