


CUSTOMER DATA SHEET

COIL @ +25° C  
 RESISTANCE 700Ω ± 10%  
 NOMINAL VOLTAGE 26.5 VDC  
 MUST OPERATE 13.5 VDC  
 MUST RELEASE 1.5 VDC

ENVIRONMENT:  
 VIBRATION 10 CPS TO 2000 CPS AT 30 g's  
 SHOCK 100 g's 6 ± 1 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES:  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

TOLERANCE UNLESS OTHERWISE SPECIFIED  
 DECIMALS ± .005 FRACTIONAL ± 1/64

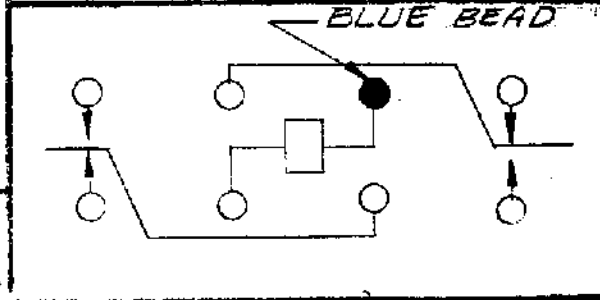

CONTACT RATING: LOW LEVEL TO  
2 AMP @ 28 VDC RESISTIVE  
100,000 OPERATIONS

DR. 2-2-84 CK. OSW  
**Communications Instruments, Inc.**

CUST. QPL  
 CUST. NO. M39016/6-107M

TYPE HFWM RELAY

**HFW1131K04M**