


Electrical Specification

Parameters		Value	Unit
Insertion Loss, typ/max	869 MHz ~ 894 MHz	1.6 / 2.0	dB
Pass Band Ripple, typ/max	869 MHz ~ 894 MHz	0.4 / 1.0	dB
VSWR, typ/max	869 MHz ~ 894 MHz	1.5 / 1.8	-
Attenuation, min/typ	45 MHz	-50 / -65	dB
	779 MHz ~ 804 MHz	-46 / -49	dB
	824 MHz ~ 849 MHz	-42 / -49	dB
	1693 MHz ~ 1743 MHz	-36 / -39	dB
	1738 MHz ~ 1788 MHz	-35 / -38	dB
	2400 MHz ~ 2500 MHz	-30 / -33	dB
	2607 MHz ~ 2682 MHz	-30 / -33	dB
3000 MHz ~ 6000 MHz	-27 / -30	dB	
Input Power, max, 3000h, 50°C		15	dBm
ESD voltage	ESD(MM)	50	VDC
Sensitive discharge device	ESD(HBM)	175	VDC
DC Voltage		5	V
Terminating Source Impedance		50	Ω
Useable Passband		25	MHz
Operating Temperature Range		-30 to +85	°C
Storage Temperature Range		-40 to +85	°C



Dimension

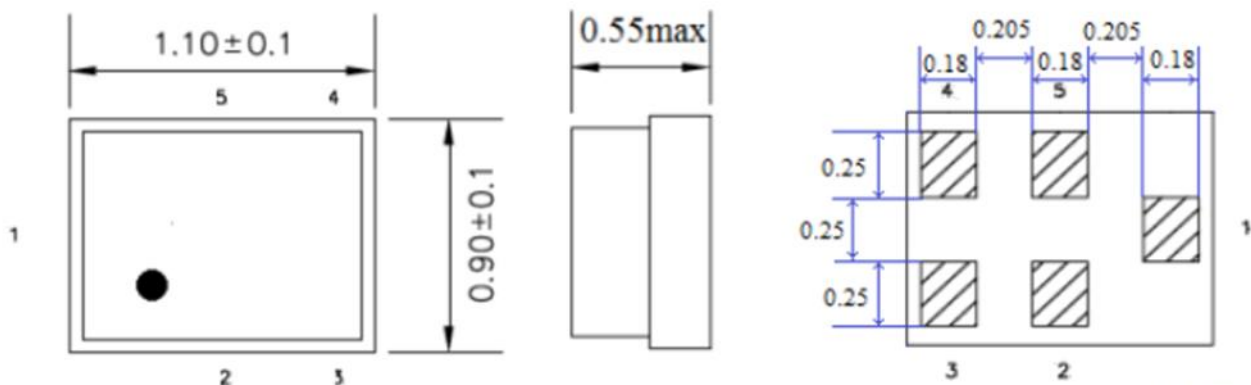


Unit: mm

PIN #	PIN NAME	DESCRIPTION
1	IN	Input
4	OUT	Output
2,3,5	GND	Ground

Frequency Characteristics

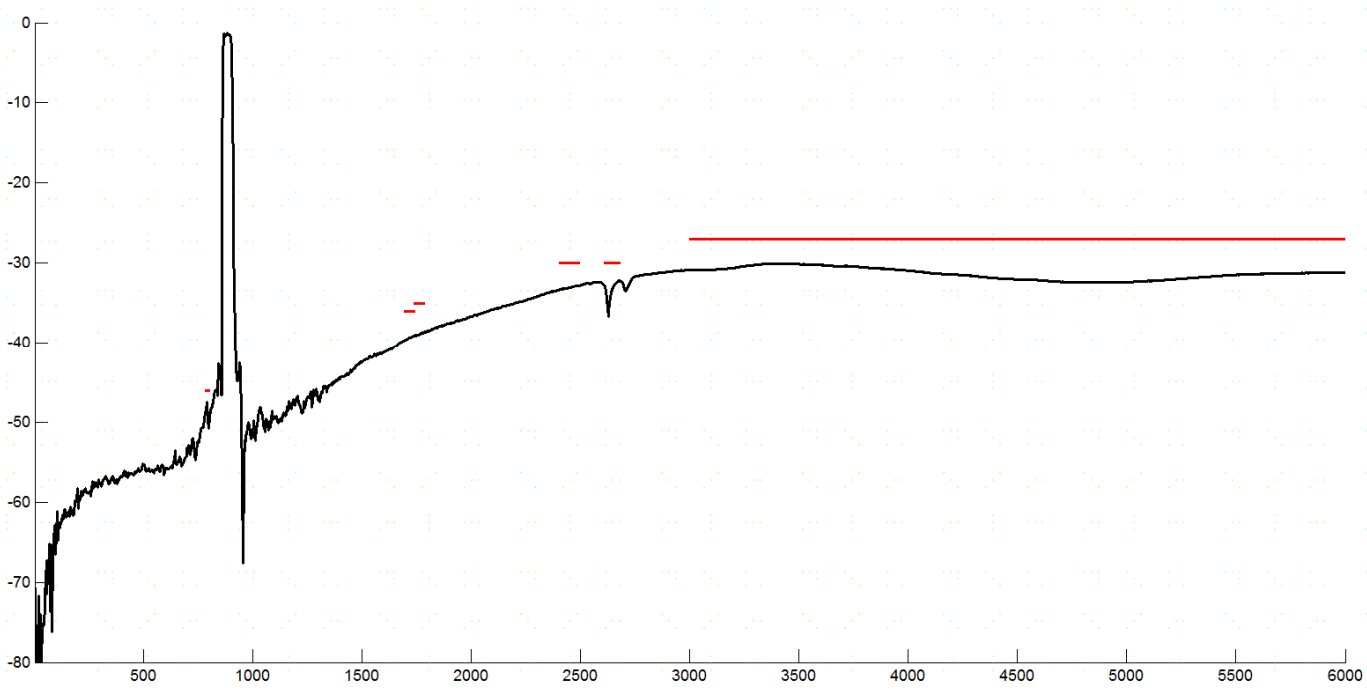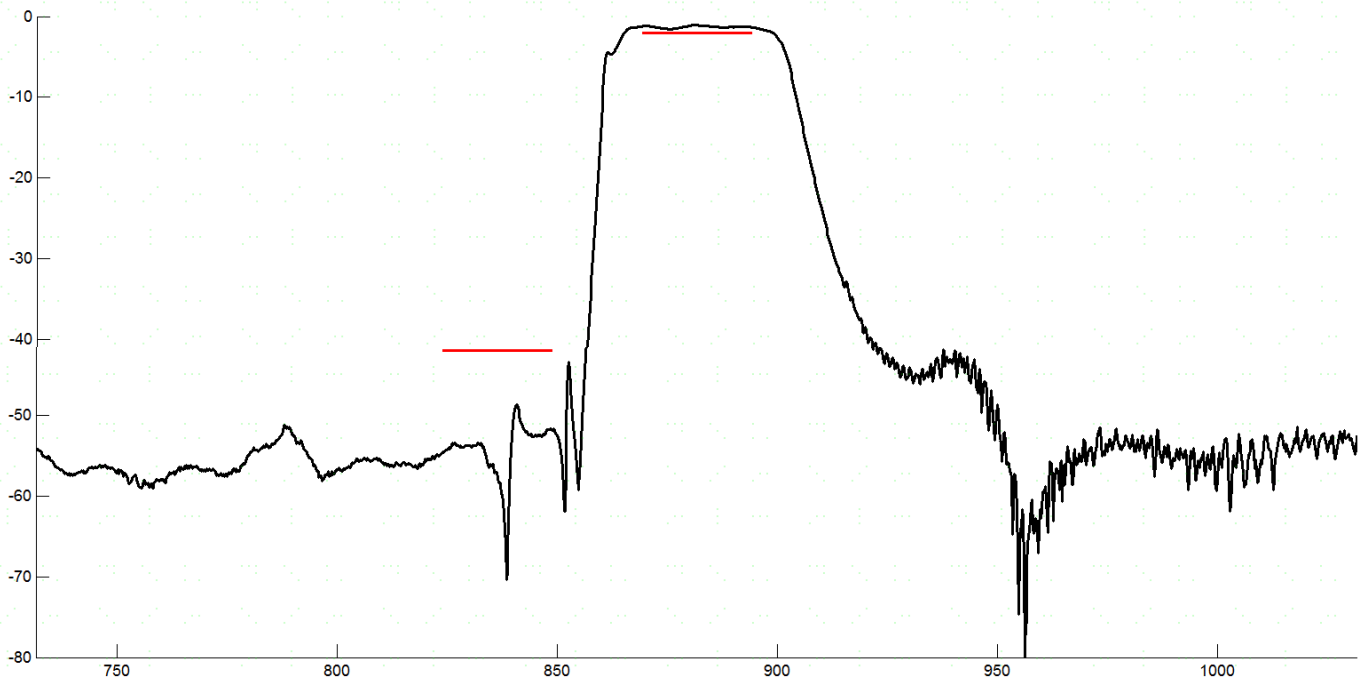

Test Circuit

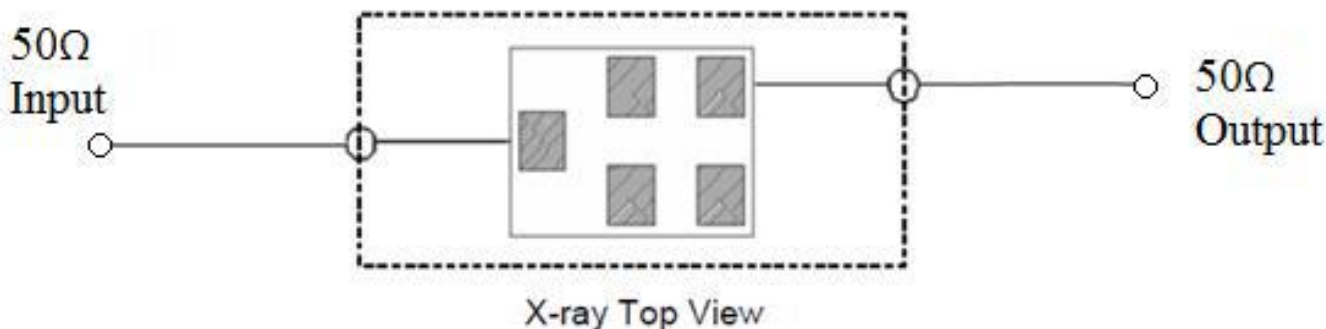


Environmental

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	2
REACH – SVHC	Compliant
RoHS	Compliant
PACKAGING	TAPE & REEL



Tape Dimension

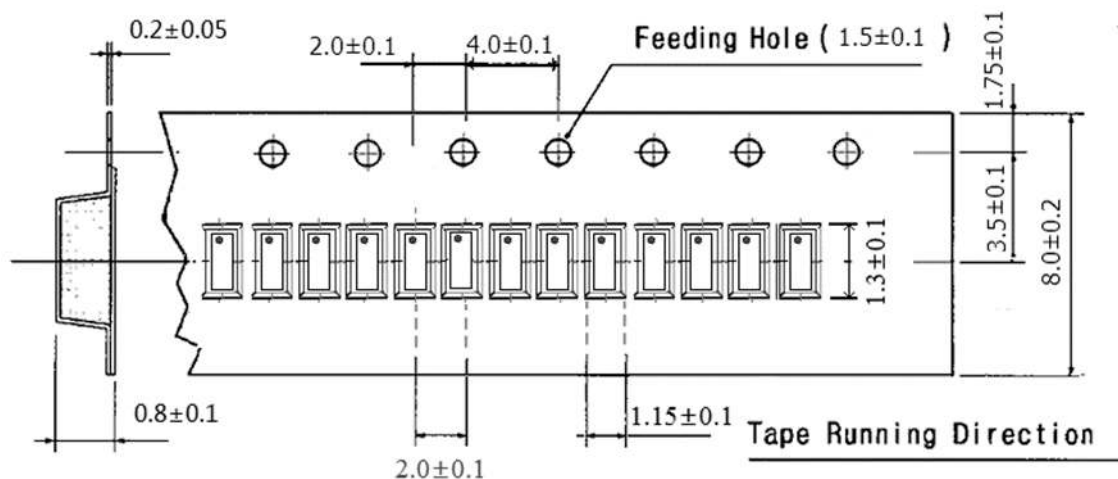

APPROVAL

DRAWN BY	ZZ, August 11, 2021
APPROVED BY	AR, August 11, 2021
REVISION	A, Initial Release

Raltron Electronics / RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided only for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.

Copyright © 2016, Raltron Electronics / RAMI Technology USA, LLC. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Raltron Electronics / RAMI Technology USA, LLC.

RALTRON ELECTRONICS ■ 10400 N.W. 33rd Street ■ Miami, Florida 33172 ■ U.S.A.
Tel: +1-305-593-6033 ■ Fax: +1-305-594-3973 ■ e-mail: sales@raltron.com ■ internet: <http://www.raltron.com>