

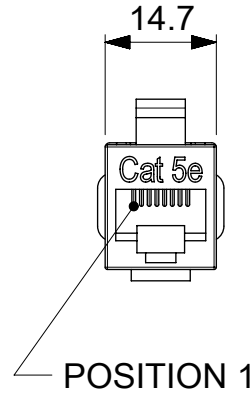



RECOMMENDED  
PANEL OPENING




POSITION 1

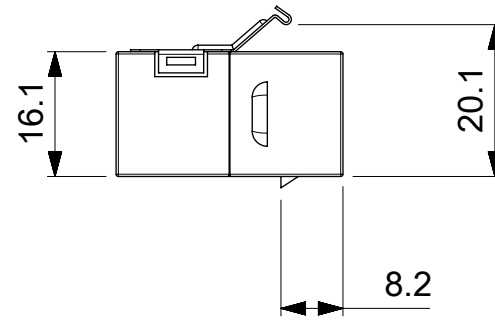

POSITION 1



30



WIRING	
PIN1	PIN1
PIN2	PIN2
PIN3	PIN3
PIN4	PIN4
PIN5	PIN5
PIN6	PIN6
PIN7	PIN7
PIN8	PIN8
SHIELD	SHIELD

MATERIAL	
HOUSING	ABS, UL94V-0
CONTACTS	PHOSPHOR BRONZE TIN PLATED
CONTACT PLATING	GOLD, OVER NICKEL PLATE
SHIELD	BRONZE WITH NICKEL PLATE
ELECTRICAL	
DC CURRENT RATING	1A
VOLTAGE RATING	50V AC/DC
MISCELLANEOUS	
RATING	CATEGORY 5E (EIA /TIA CAT 5E)
ALL DIMENSIONS ARE FOR REFERENCE ONLY	

QUALITY SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
▽ = 0	EC NO: 168789 DRWN: AKHEMIRI CHK'D: DMERONI REV   APPR: AMELZI	2017/11/28 2017/11/29 2017/11/29	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS	SCALE				
▽ = 0			ANGULAR TOL ±		mm	1:1				
▽ = 0			4 PLACES ±		DRWN BY	DATE	2500.0010.0 STRAIGHT SNAP-IN COUPLER RJ45 - RJ45 JACK FULLY SHIELDED CAT 5E			
▽ = 0			3 PLACES ±		AKHEMIRI	2017/11/28				
▽ = 0			2 PLACES ±		CHK'D BY	DATE	PRODUCT CUSTOMER DRAWING			
▽ = 0			1 PLACE ±		DMERONI	2017/11/29				
▽ = 0	0 PLACES ±		APPR BY	DATE	SERIES: 93606 MATERIAL NUMBER: 936060259 CUSTOMER: GENERAL MARKET					
▽ = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		AMELZI	2017/11/29						
▽ = 0	A	REV	DRAWING SIZE	FIRST ANGLE PROJECTION	DOCUMENT NUMBER: 936060259 DOC TYPE: PSD DOC PART: 000 SHEET NUMBER: 1 OF 1					
▽ = 0			A4							