THIS DRAWING IS A CONTROLLED DOCUMENT.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E1	REDRAWN PER ECO-17-007400	13DEC2017	RS	DR

AMP WIRE RANGE	Listed FILE E13288	LR7189 Certified
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

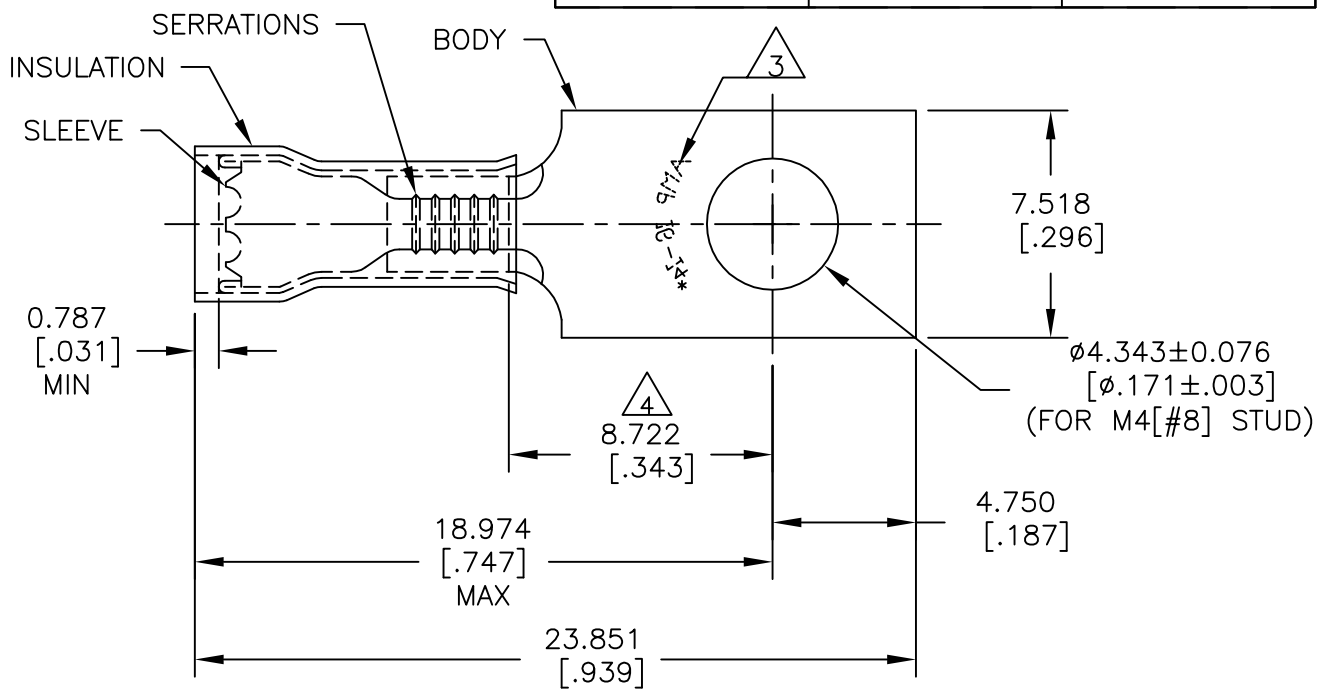

1 BODY MATERIAL THK 0.787±0.051[.031±.002]

2 FOR ø2.921[ø.115] TO ø4.318[ø.170] WIRE INSULATION.

3 STAMP AMP 16-14* APPROX AS SHOWN.

4 APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE

5 MATERIAL:
BODY & SLEEVE: COPPER PER ASTM B-152
INSULATION: NYLON

6 FINISH:
BODY & SLEEVE: TIN PLATE PER ASTM B 545
INSULATION: COLOR-BLUE.

1000	LOOSE PIECE	321283
QTY.	PACKAGE TYPE	PART NUMBER

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- -.
© COPYRIGHT - TE Connectivity ALL RIGHTS RESERVED.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± –
2 PLC	± –
3 PLC	± 0.127[.005]
4 PLC	± –
ANGLES	± –

DWN RAVI S 13DEC2017
CHK ROHDE DANIEL F 13DEC2017
APVD ROHDE DANIEL F 13DEC2017
PRODUCT SPEC UL 486 A-B
APPLICATION SPEC 114-2157
WEIGHT –

MATERIAL 5 | FINISH 6

TE Connectivity

NAME WIRE TERMINAL, P.I.D.G, RECTANGULAR TONGUE, WIRE SIZE: 16-14 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A4	00779	C-321283	–

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV E1