1326460-1 - ACTIVE

AMP | AMP MCP 2.8, AMP MCP Connector System

TE Internal #: 1326460-1 Housing for Female Terminals, Wire-to-Wire, 3 Position, .256 in [6.5 mm] Centerline, Sealable, Black, Signal, Cable Mount (Free-Hanging), Hybrid

View on TE.com >

Connectors > Automotive Connectors > Automotive Housings > AMP MCP, SEALED CONNECTOR HOUSING



Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 2.8 mm [.11 in]

Connector System: Wire-to-Wire

Number of Positions: **3**

Centerline (Pitch): 6.5 mm [.256 in]

All AMP MCP, SEALED CONNECTOR HOUSING (164)

Features

Product Type Features

Connector Shape

Connector & Housing Type

Rectangular

Housing for Female Terminals



Connector System	Wire-to-Wire
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	On the Terminal
Configuration Features	
Number of Positions	3
Number of Rows	1
Electrical Characteristics	
Operating Voltage	24 VDC
Nominal Voltage Architecture	12 V, 24 V
Body Features	
Cable Exit Angle	180°
Primary Product Color	Black
Contact Features	

Housing for Female Terminals, Wire-to-Wire, 3 Position, .256 in [6.5 mm] Centerline, Sealable, Black, Signal, Cable Mount (Free-Hanging), Hybrid



Contact Size	2.8mm	
Contact Type	Receptacle	
Mating Tab Width	2.8 mm[.11 in]	
Mechanical Attachment		
Terminal Position Assurance	Yes	
Strain Relief	Add By Accessory	
Mating Alignment Type	Polarized	
Mating Alignment	With	
Connector Mounting Type	Cable Mount (Free-Hanging)	
Housing Features		
Housing Material	PAGF	
Centerline (Pitch)	6.5 mm[.256 in]	
Dimensions		
Connector Height	22.8 mm[.898 in]	
Product Width	29.4 mm[1.158 in]	
Product Length	31 mm[1.22 in]	

Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C[158 °F][167 °F] [176 °F][185 °F]	
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]	
Operation/Application		
Circuit Application	Signal	
Industry Standards		
Degree of Protection	IP67	
UL Flammability Rating	UL 94HB	
Packaging Features		
Packaging Quantity	600	
Packaging Method	Package	
Other		
Serviceable	Yes	
Connector Position Assurance Capable	No	

Housing for Female Terminals, Wire-to-Wire, 3 Position, .256 in [6.5 mm] Centerline, Sealable, Black, Signal, Cable Mount (Free-Hanging), Hybrid



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.	
Solder Process Capability	Not applicable for solder process capability	

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach


Compatible Parts



Also in the Series AMP MCP 2.8

Housing for Female Terminals, Wire-to-Wire, 3 Position, .256 in [6.5 mm] Centerline, Sealable, Black, Signal, Cable Mount (Free-Hanging), Hybrid



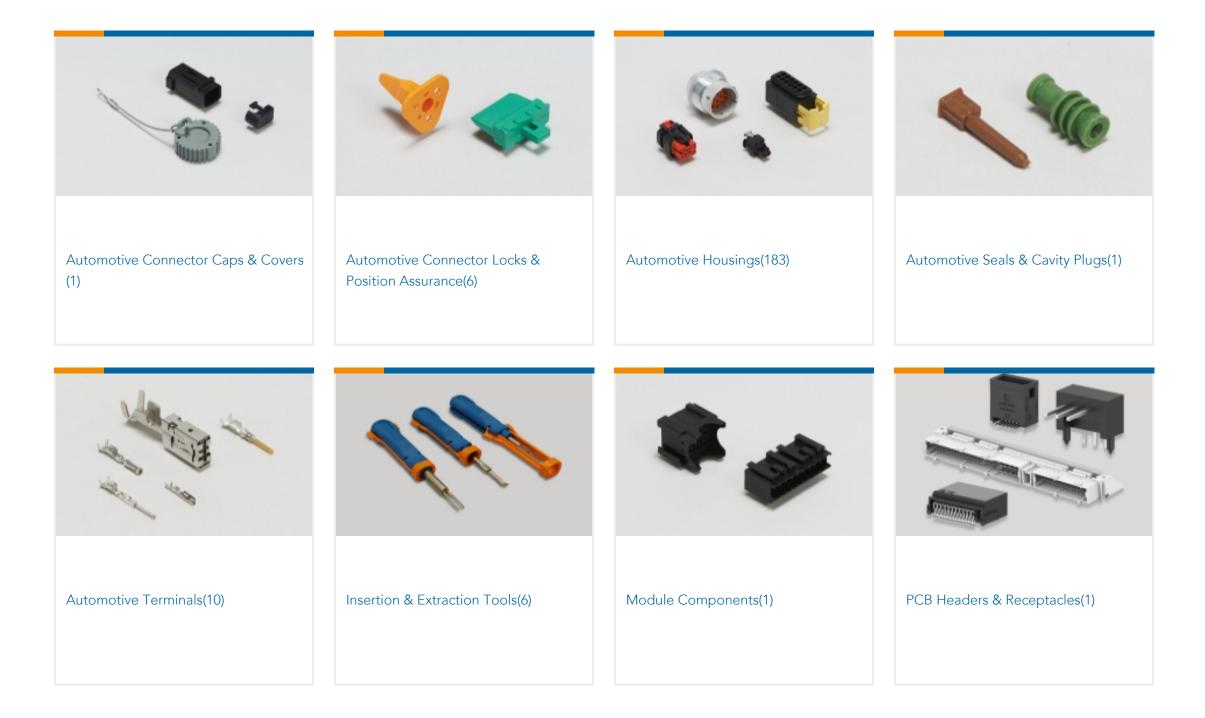

Also in the Series AMP MCP Connector System




Automotive Connector Caps & Covers (25)	Automotive Connector Locks & Position Assurance(7)	Automotive Housings(360)	Automotive Seals & Cavity Plugs(6)
And a second sec			
Automotive Terminals(135)	Insertion & Extraction Tools(13)	Other Automotive Connector Accessories(2)	PCB Headers & Receptacles(30)

Customers Also Bought

Housing for Female Terminals, Wire-to-Wire, 3 Position, .256 in [6.5 mm] Centerline, Sealable, Black, Signal, Cable Mount (Free-Hanging), Hybrid



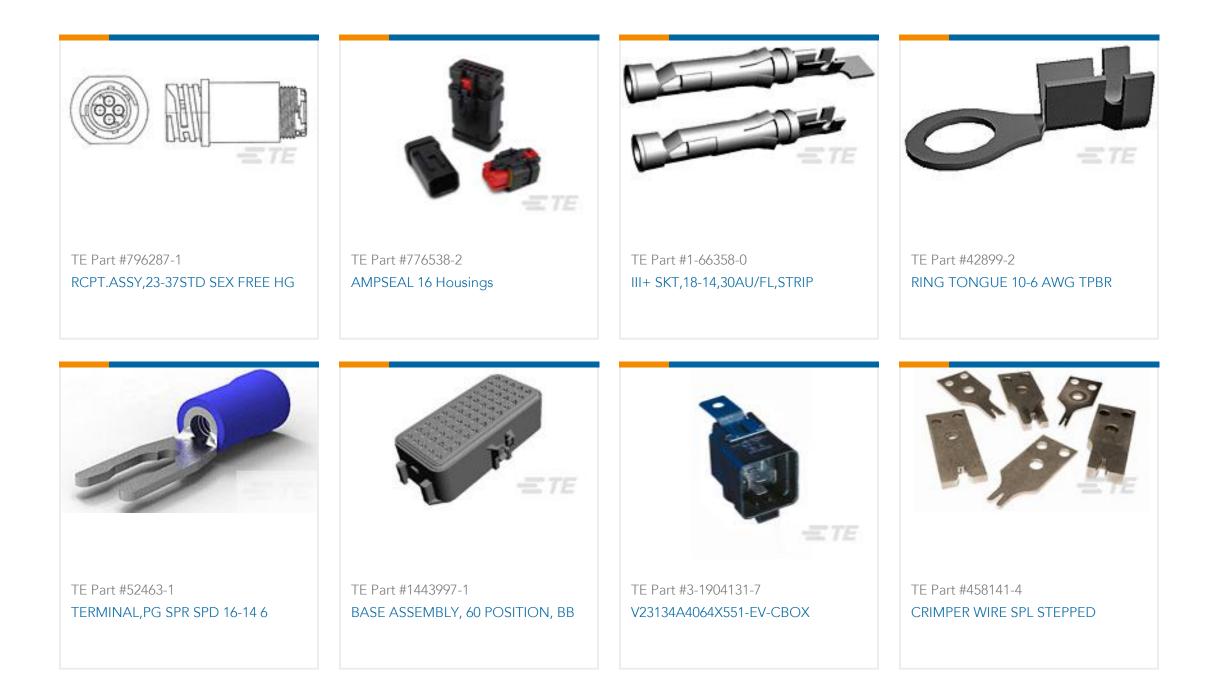

Documents

Product Drawings ASSY, PLUG, 3P SEALED, 2.8MCP

English

CAD Files Customer View Model

ENG_CVM_CVM_1326460-1_A.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1326460-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1326460-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Product Specification

English

Instruction Sheets Instruction Sheet (U.S.)

English