

Snipe Nose Side Cutting Pliers

Stork Beak Pliers, DIN ISO 5745

26

Elastic tips: stable even when twisted





- > distortion-tolerant, flexible precision tips
- > half-round, long, pointed jaws
- > hardened cutting edges (approx. 61 HRC) for soft, medium hard and hard wire
- > vanadium steel; forged, multi-stage oil-hardened

26 11 200 S1

Integrated stripping hole in cutting blade. Strips 12 AWG wire

26 12 200 T BKA / 26 22 200 T BKA*


Pliers with integrated tether attachment point for tool drop protection system

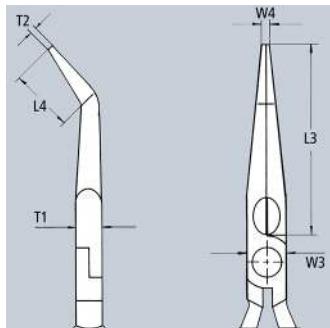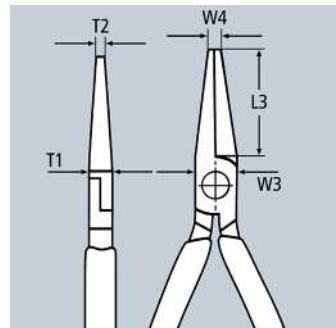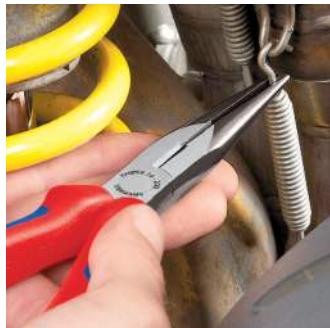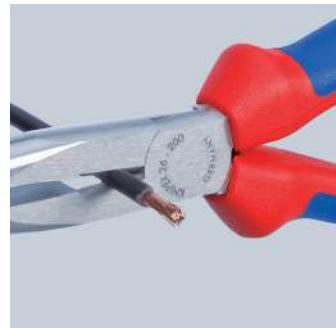

26 11 200



26 12 200

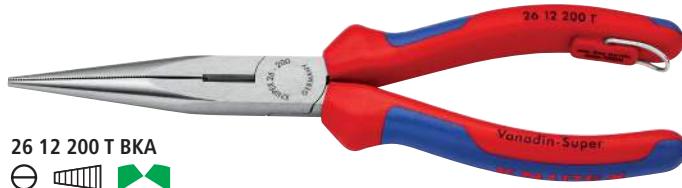


26 12 200 T BKA



26 22 200

≤40°

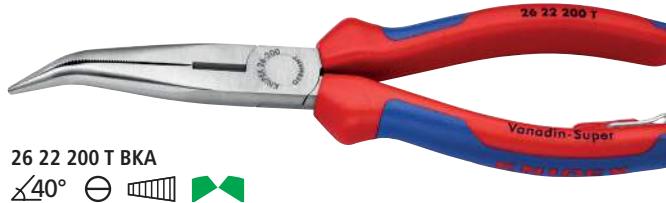

26 22 200 T BKA

≤40°



Product Number	Packaging	↔ mm		Pliers	Head	Handles	Cutting capacities		Dimensions						lbs	
							Ø Inch Ø mm	Ø Inch Ø mm	L3 Inch mm	L4 Inch mm	T1 Inch mm	W3 Inch mm	W4 Inch mm	T2 Inch mm		
26 11 200	X	8 200	⊖	⊖	black atramentized	polished	plastic coated	1/8 3.2	3/32 2.2	2 7/8 73.0	-	3/8 9.5	45/64 18.0	1/8 3.0	3/32 2.5	0.38
26 11 200 S1	X	8 200	⊖	⊖	black atramentized	polished	multi-component grips	1/8 3.2	3/32 2.2	2 7/8 73.0	-	3/8 9.5	45/64 18.0	1/8 3.0	3/32 2.5	0.38
26 12 200	X	8 200	⊖	⊖	black atramentized	polished	multi-component grips, integrated tether attachment point	1/8 3.2	3/32 2.2	2 7/8 73.0	-	3/8 9.5	45/64 18.0	1/8 3.0	3/32 2.5	0.44
26 12 200 T BKA	X	8 200	⊖	⊖	black atramentized	polished	multi-component grips, integrated tether attachment point	1/8 3.2	3/32 2.2	2 7/8 73.0	-	3/8 9.5	45/64 18.0	1/8 3.0	3/32 2.5	0.45
26 21 200	X	8 200	≤40° ⊖	⊖	black atramentized	polished	plastic coated	1/8 3.2	3/32 2.2	2 7/8 73.0	29/32 23.0	3/8 9.5	45/64 18.0	1/8 3.0	3/32 2.5	0.38
26 22 200	X	8 200	≤40° ⊖	⊖	black atramentized	polished	multi-component grips	1/8 3.2	3/32 2.2	2 7/8 73.0	29/32 23.0	3/8 9.5	45/64 18.0	1/8 3.0	3/32 2.5	0.43
26 22 200 T BKA	X	8 200	≤40° ⊖	⊖	black atramentized	polished	multi-component grips, integrated tether attachment point	1/8 3.2	3/32 2.2	2 7/8 73.0	29/32 23.0	3/8 9.5	45/64 18.0	1/8 3.0	3/32 2.5	0.45