

Directive 2002/95/EC
„RoHS“
Compliant

NOTES:


1. METALSHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
2. INSULATORS: PBT GF UL 94 V-0; GREEN
3. SIGNAL CONTACTS: COPPER ALLOY
PLATING: 8µm HARD GOLD over min. 50µm NICKEL
4. NO CONTACTS ON POS. A1 + A2
5. METAL BRACKETS: STEEL; min. 320µm TIN over 80µm NICKEL
6. THREADED INSERTS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
7. P.C.B. HOLE DRILLINGS ON SHEET 2
8. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
9. CONNECTOR IS PART MARKED: 3043W2SAT99N20X CONEC ABC

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH			
DO NOT ALTER CAD DRAWING BY HAND			
rev.	description	date	name

tolerance		scale:	2:1 (5:1)
	dim. in mm	material:	see notes
date	name	title:	
drawn 23.06.10	Schmidt	D-SUB COM. FEMALE 90°	
appd. 23.06.10	Koch	43W2S	
norm		with threaded insert and metal bracket	
d-old		dwg no:	Inventor 10
a	Origin		13K2A2298
DIN-A3		part no:	3043W2SAT99N20X
sh: 1			



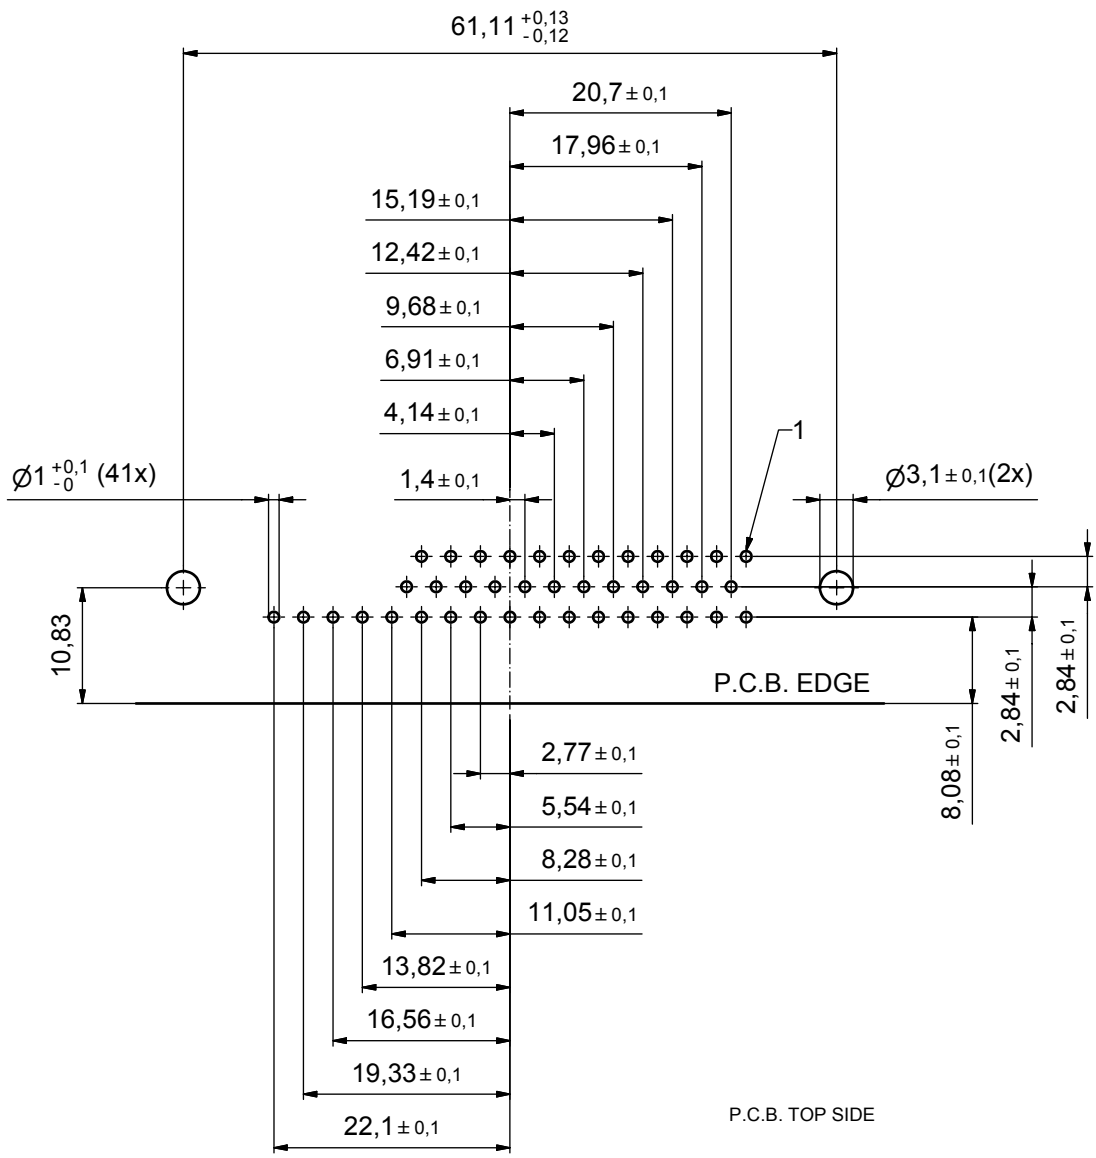

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance		 dim. in mm
DO NOT ALTER CAD DRAWING BY HAND				date	name	
a	Origin			drawn	23.06.10	Schmidt
rev.	description	date	name	appd.	23.06.10	Koch
				norm		
				d-old		
				scale: 2:1 material: see sheet 1		
				title: P.C.B. HOLE DRILLINGS D-SUB COMBINATION MALE 90° 43W2S with threaded insert and metal bracket		
				dwg no: Inventor 10		DIN-A3
				part no: 13K2A2298		sh: 2
				part no: see sheet 1		