


## UHV 25-KH/KH

Order No.: 2130156


The illustration shows a combination of versions UHV 25-AS/AS, UHV 25-KH/AS and UHV 25-KH/KH

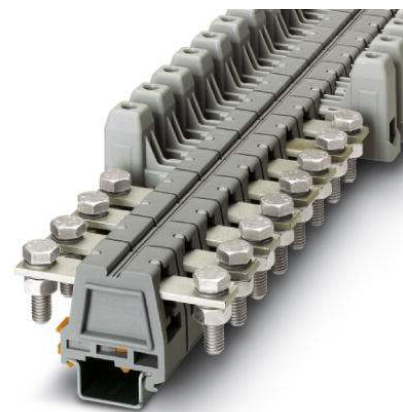

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2130156>

Universal terminal block with screw connection, cross section: 6 - 25 mm<sup>2</sup>, AWG: 10 - 4, width: 26 mm, color: gray

### Commercial data

|                          |   |
|--------------------------|---|
| GTIN (EAN)               | <br>4 017918 052935 |
| sales group              | A000  |
| Pack                     | 10 pcs.   |
| Customs tariff           | 85369010  |
| Catalog page information | Page 324 (CL-2009)  |

### Product notes

WEEE/RoHS-compliant since:  
11/23/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General

|                                    |      |
|------------------------------------|------|
| Number of levels                   | 1    |
| Number of connections              | 2    |
| Color                              | gray |
| Insulating material                | PA-F |
| Inflammability class acc. to UL 94 | HB   |

#### Dimensions

|                 |          |
|-----------------|----------|
| Length          | 102.5 mm |
| Width           | 26 mm    |
| Height NS 35/15 | 72 mm    |

#### Technical data

|                                  |               |
|----------------------------------|---------------|
| Rated surge voltage              | 8 kV          |
| Pollution degree                 | 3             |
| Surge voltage category           | III           |
| Insulating material group        | II            |
| Connection in acc. with standard | IEC 60947-7-1 |
| Nominal current $I_N$            | 101 A         |
| Nominal voltage $U_N$            | 1000 V        |

#### Connection data

|   |                     |
|---|---------------------|
| Conductor cross section stranded min.   | 6 mm <sup>2</sup>   |
| Conductor cross section stranded max.   | 25 mm <sup>2</sup>  |
| Conductor cross section AWG/kcmil min.  | 10                  |
| Conductor cross section AWG/kcmil max   | 4                   |
| Conductor cross section stranded, with ferrule without plastic sleeve min.            | 4 mm <sup>2</sup>   |
| Conductor cross section stranded, with ferrule without plastic sleeve max.            | 25 mm <sup>2</sup>  |
| Conductor cross section stranded, with ferrule with plastic sleeve min.               | 4 mm <sup>2</sup>   |
| Conductor cross section stranded, with ferrule with plastic sleeve max.               | 25 mm <sup>2</sup>  |
| 2 conductors with same cross section, solid min.                                      | 2.5 mm <sup>2</sup> |
| 2 conductors with same cross section, solid max.                                      | 10 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded min.                                   | 4 mm <sup>2</sup>   |
| 2 conductors with same cross section, stranded max.                                   | 10 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, min. | 2.5 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, max. | 10 mm <sup>2</sup>  |
| Type of connection  | Screw connection    |
| Stripping length  | 21 mm               |

|                        |              |
|------------------------|--------------|
| Screw thread           | M5           |
| Tightening torque, min | 4 Nm         |
| Tightening torque max  | 4.5 Nm       |
| Busbar                 | 15 mm x 3 mm |

### Certificates / Approvals



Certification

CSA, GL, GOST, PRS, UL

### Accessories

| Item            | Designation                   | Description   |
|-----------------|-------------------------------|---|
| <b>Assembly</b> |                               |   |
| 1201659         | E/AL-NS 32                    | End clamp, for end support of UKH 50 - UKH 240, is pushed onto DIN rail NS 32 and fixed with 2 screws, width: 10 mm, color: Aluminum  |
| 1201662         | E/AL-NS 35                    | End clamp, for end support of UKH 50 to UKH 240, is pushed onto DIN rail NS 35 and fixed with 2 screws, width: 10 mm, color: aluminum |
| 1201028         | NS 32 AL UNPERF 2000MM        | G rail 32 mm (NS 32)  |
| 1201280         | NS 32 CU/120QMM UNPERF 2000MM | G-profile DIN rail, deep-drawn, material: Copper, unperforated, height 15 mm, width 32 mm, length 2 m                                 |
| 1201358         | NS 32 CU/35QMM UNPERF 2000MM  | G-profile DIN rail, material: Copper, unperforated, height 15 mm, width 32 mm, length 2 m   |
| 1201002         | NS 32 PERF 2000MM             | G-profile DIN rail, material: Steel, perforated, height 15 mm, width 32 mm, length 2 m  |
| 1201015         | NS 32 UNPERF 2000MM           | G-profile DIN rail, material: Steel, unperforated, height 15 mm, width 32 mm, length 2 m  |
| 0801762         | NS 35/ 7,5 CU UNPERF 2000MM   | DIN rail, material: Copper, unperforated, height 7.5 mm, width 35 mm, length: 2 m   |
| 0801733         | NS 35/ 7,5 PERF 2000MM        | DIN rail, material: Steel, galvanized and passivated with a thick layer, perforated, height 7.5 mm, width 35 mm, length: 2 m          |
| 0801681         | NS 35/ 7,5 UNPERF 2000MM      | DIN rail, material: Steel, unperforated, height 7.5 mm, width 35 mm, length: 2 m  |
| 1201756         | NS 35/15 AL UNPERF 2000MM     | DIN rail, deep-drawn, high profile, unperforated, 1.5 mm thick, material: Aluminum, height 15 mm, width 35 mm, length 2 m             |

|         |                            |  |
|---------|----------------------------|--|
| 1201895 | NS 35/15 CU UNPERF 2000MM  | DIN rail, material: Copper, unperforated, 1.5 mm thick, height 15 mm, width 35 mm, length: 2 m |
| 1201730 | NS 35/15 PERF 2000MM       | DIN rail, material: Steel, perforated, height 15 mm, width 35 mm, length: 2 m                  |
| 1201714 | NS 35/15 UNPERF 2000MM     | DIN rail, material: Steel, unperforated, height 15 mm, width 35 mm, length: 2 m                |
| 1201798 | NS 35/15-2,3 UNPERF 2000MM | DIN rail, material: Steel, unperforated, 2.3 mm thick, height 15 mm, width 35 mm, length: 2 m  |
| 2130428 | UHV -E                     | End clamp, Width: 5.2 mm, Color: gray  |
| 2130402 | UHV -TP1                   | Separating plate, Width: 2 mm, Height: 67.5 mm, Color: gray                                    |
| 2130431 | UHV 25-AH                  | Covering hood, Width: 22.8 mm, Height: 45.2 mm, Color: gray                                    |
| 2130541 | UHV 25-VS 2                | Connection rail, Number of positions: 2, Color: silver   |
| 2130554 | UHV 25-VS 3                | Connection rail, Number of positions: 3, Color: silver   |

**Marking**




|         |                  |   |
|---------|------------------|---|
| 1007248 | SBS10:UNBEDRUCKT | Marker cards, unprinted, for individual labeling with the M-PEN, 250-section, perforated, white plastic |
| 1050525 | ZB10:SO/CMS      | Zack strip, 10-section, divisible, special printing, marking according to customer requirements         |

**Tools**


|         |                 |  |
|---------|-----------------|--|
| 1205079 | SZS 1,0X6,5 VDE | Screwdriver, bladed, VDE insulated, size: 1.0 x 6.5 x 150 mm, 2-component grip, with non-slip grip |
| 1205079 | SZS 1,0X6,5 VDE | Screwdriver, bladed, VDE insulated, size: 1.0 x 6.5 x 150 mm, 2-component grip, with non-slip grip |

## Diagrams/Drawings

### Dimensioned drawing

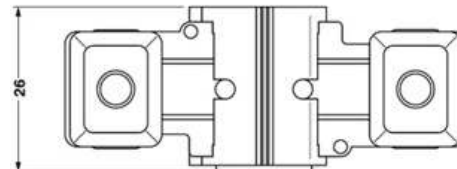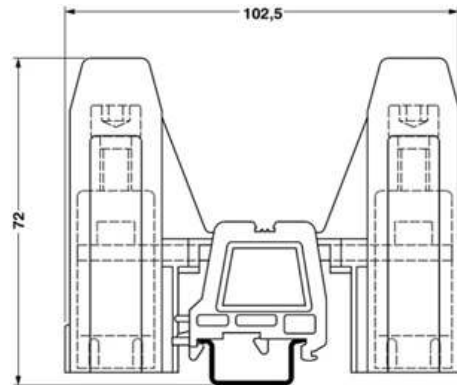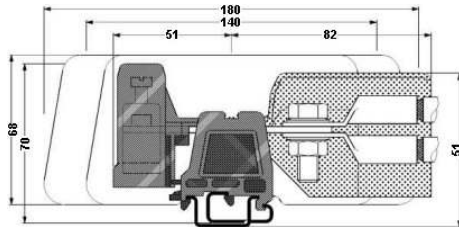

### Circuit diagram

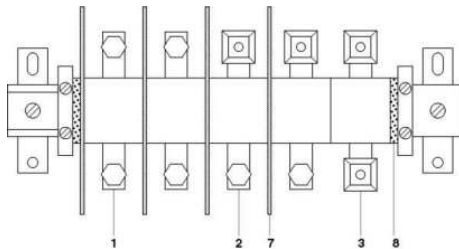

- 1 = high current connector, AS screw set on both sides
- 2 = high current connector, terminal sleeve KH on one side, screw set AS on the other side
- 3 = high current connector
- 7 = separating plate
- 8 = end piece

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;