



T69-25 Graphite Sheets

Version 1.280318



Graphite Sheets

T69-25 is a high performing thermal interface material which is very thin, synthetically made from a highly oriented graphite polymer film and has excellent thermal properties in both the XY and the Z axis. T69-25 is ideal for providing thermal management in some of the most demanding of applications.

Features

Highly oriented pyrolytic graphite sheet with high thermal conductivity
It is flexible and has features of ultra-thin and high EMI shielding effect
Excellent thermal conductivity: 1600 W/mK (4x as high as copper, 7x as high as aluminium)

Light weight: Specific gravity: 2.3

Flexible and easy to be cut or trimmed

Low thermal resistance

Low moisture content: < 1%

Applications

Electronic components: IC, CPU, MOS

LED, M/B, P/S, Heat Sink

LCD, TV, Notebook PC, PC Telecom Device, Wireless, etc.

DDR II Module, DVD Applications, Hand-set applications, etc.

Properties

✓ REACH Compliant

✓ ROHS Compliant

Property		T69-25	Unit	Tolerance	Test Method
Thickness		25um	mm	-	Micrometer
		0.025	mm	±0.010	Micrometer
Thermal Conductivity	X-Y Direction	1500	W/mK	-	AC calorimeter
	Z Direction	18	W/mK	-	Laser flash
Thermal diffusivity		9 - 10 (0.0009- 0.0010m ² /s)	cm ² /s	-	AC calorimeter
Density		1.95 (1095 kg/ m ³)	g/cm ³	-	Archimedes law
Specific heat (at 50°C)		0.85 (850J/kgk)	(J/gk)	-	-
Heat resistance		400	°C	-	-
Extensional strength	X-Y Direction	30	Mpa	-	-
	Z Direction	0.1	Mpa	-	-
Expansion coefficient	X-Y Direction	9.3 x 10 ⁻⁷	1/K	-	-
	Z Direction	3.2 x 10 ⁻⁵	1/K	-	-
Bending test (R5/180°C)		20000 or more	Times	-	-
Electric conductivity		20000	S/cm	-	JISK7194
Operating Temperature		-50 to 200	°C	-	-
Shelf Life		36	months	-	-

T-Global Technology Limited
1 & 2 Cosford Business Park, Central Park,
Lutterworth, Leicestershire LE17 4QU U.K.

Tel: +44 (0)1455 553 510

Email: sales@tglobaltechnology.com

Web: www.tglobaltechnology.com

Skype: tglobal.technology

VAT #: GB 116 662 714



T69-25 Graphite Sheets


Standard Weights & Dimensional Tolerance

Size	Thickness (mm)	Weight (gr)
	200x200x0.025	0.5

* All measurements in weights are in gr


** All sizes are in mm

Data

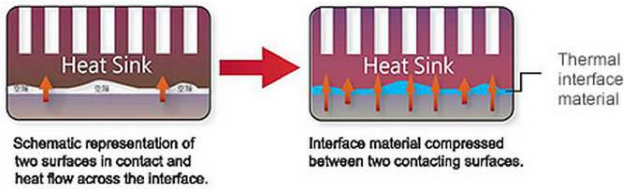


Die-Cut Thickness Tolerances	Thickness (mm)	Tolerance (mm)
	0.3	±0.03
	0.5	±0.05
	0.8	±0.08
	1.0	±0.1
	1.2	±0.12
	1.5	±0.15
	2.0	±0.2
	2.5 - 3.5	±0.25
	4.0 - 4.5	±0.3
	5.0	±0.35
	6.0 - 8.0	±0.4
	9.0	±0.45
10.0	±0.5	
>10.0	±0.5	

Thermal Conductivity T69 (X-Y axis)

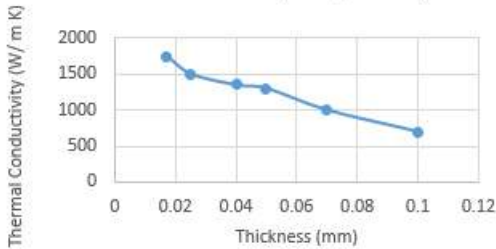

Thermal Conductivity (Z axis)

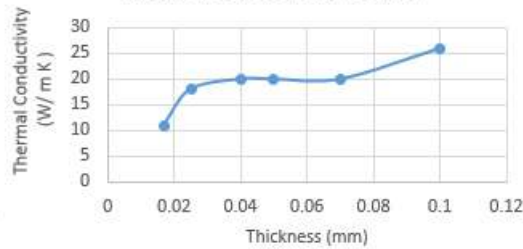

* Data for design engineer guidance only. Observed performance varies in application. Engineers are reminded to test the material in application.

NOTICE: The information contained herein is to the best of our knowledge true and accurate. However, since the varied conditions of potential use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part and users should make their own test to determine the suitability of our products in any specific situation. This product is sold without warranty either expressed or implied, of fitness for a particular purpose or otherwise, except that this product shall be of standard quality, and except to the extent otherwise stated in T-Global Technology Europe and North America's invoice, quotation, or order acknowledgment. We disclaim any and all liabilities incurred in connection with the use of information contained herein, or otherwise. All risks of such are assumed by the user. Furthermore, nothing contained herein shall be construed as a recommendation to use any process or to manufacture or to use any product in conflict with existing or future patents covering any product or material or its use.