


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00158	Connector, 5P mini DIN male, molding style, brass, nickel plating	1	
2	30-00025	Wire, 5C, 20 AWG, UL2464, 300 V, 80 C, 6.5 mm, shielded, VW-1, PVC, 79A	1	
3	24-00069	Overmold, PVC	1	black
4	Heat Shrink	Heat shrink tube, Ø7.0, 105° C, L=10 ±2 mm	1	black
5	Heat Shrink	Heat shrink tube, Ø1.0, 105° C, L=30 ±5 mm	1	black, covers drain wire
6	Tie	Twist tie	2	black

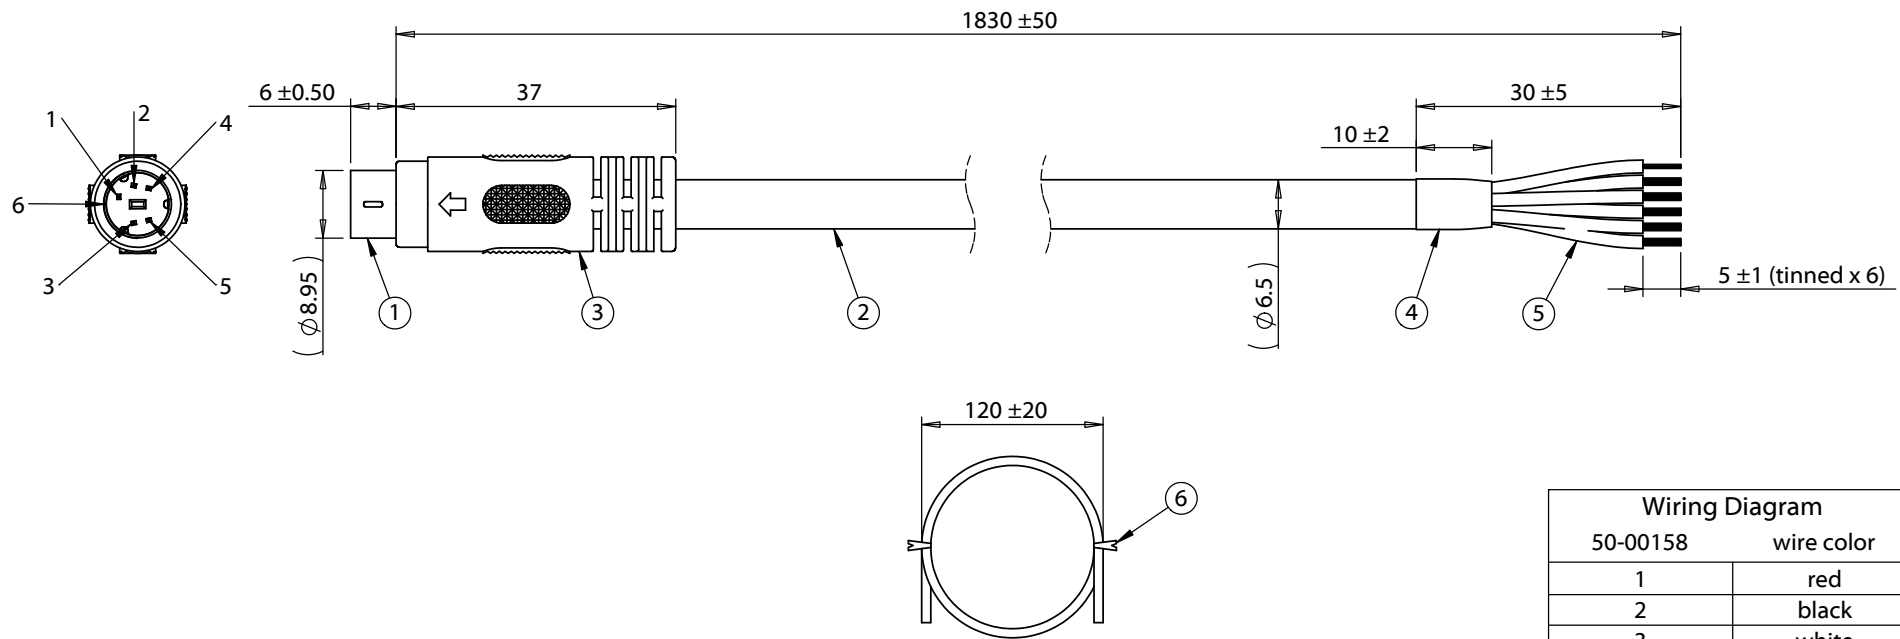

Notes:
Functionally equivalent components may be substituted

Electrical requirement: 2 A, 12 Vdc

Revision:	Date:	Description:	Prepared: GL Digitally signed by GL Date: 2017.08.08 11:23:51 -0700	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	3/08/2016	Initial release	Verified: PS Digitally signed by PS Date: 2018.01.04 16:29:53 -08'00'	RoHS and REACH compliant	
A1	6/07/2017	Corrected DIN pin numbering	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent	
				Description: Cable, 1830 mm, 5P mini-DIN male 50-00158, to stripped tinned, 20 AWG, UL2464 30-00025, shielded	
					Size: A Part number: 10-00421 Scale: 1:1 Sheet 1 of 1