

SILICON CARBIDE SCHOTTKY RECTIFIER 10 AMP, 1200 VOLT



FEATURES:

- Positive temperature coefficient
- High reverse voltage
- High operating temperature (175°C MAX)
- Stable switching over temperature extremes



www.centralsemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CSIC10-1200 is a silicon carbide Schottky rectifier designed for high frequency systems where energy efficiency and thermal performance are critical design elements.

MARKING: FULL PART NUMBER

APPLICATIONS:

- Power inverters
- Industrial motor drives
- Switch-mode power supplies
- Power factor correction
- Over-current protection

MAXIMUM RATINGS: (T_C=25°C unless otherwise noted)

	SYMBOL		UNITS
Peak Repetitive Reverse Voltage	V _{RRM}	1200	V
Peak Reverse Surge Voltage	VRSM	1200	V
DC Blocking Voltage	VR	1200	V
Average Rectified Forward Current (T _C =142°C)	Ι _Ο	10	А
Continuous Forward Current (T _C =142°C)	١ _F	14	A
Peak Forward Surge Current, tp=8.3ms	IFSM	80	А
Power Dissipation	PD	136	W
Power Dissipation (T _C =142°C)	PD	30	W
Operating and Storage Junction Temperature	TJ, T _{stg}	-55 to +175	°C
Thermal Resistance	ΘJC	1.1	°C/W


ELECTRICAL CHARACTERISTICS: (T, = 25°C unless otherwise noted)				
SYMBOL	TEST CONDITIONS	TYP	MAX	UNIT
IR	V _R =1200V	30	250	μA
I _R	V _R =1200V, T _J =175°C	60	800	μA
V _F	I _F =10A	1.5	1.7	V
V _F	I _F =10A, T _J =175°C	2.5	3.0	V
QC	V _R =600V, I _F =10A, di/dt=250A/µs	35		nC
СЈ	V _R =1.0V, f=1.0MHz	500		pF
СЈ	V _R =300V, f=1.0MHz	50		pF
СЈ	V _R =600V, f=1.0MHz	36		pF

R3 (15-June 2016)



SILICON CARBIDE SCHOTTKY RECTIFIER 10 AMP, 1200 VOLT


TO-220-2 CASE - MECHANICAL OUTLINE

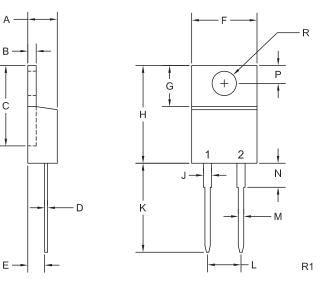

LEAD CODE: 1) Cathode 2) Anode

Tab is Common to Pin 1

MARKING: FULL PART NUMBER



DIMENSIONS					
	INCHES		MILLIMETERS		
SYMBOL	MIN	MAX	MIN	MAX	
A	0.170	0.190	4.32	4.83	
В	0.045	0.055	1.14	1.40	
C	0.460	0.507	11.68	12.88	
D	0.013	0.024	0.33	0.61	
E	0.080	0.115	2.03	2.92	
F	0.380	0.420	9.65	10.67	
G	0.230	0.270	5.84	6.86	
Н	0.570	0.615	14.48	15.62	
J	0.044	0.070	1.14	1.78	
K	0.500	0.580	12.70	14.73	
L	0.200		5.	5.08	
M	0.025	0.036	0.64	0.91	
N	0.120	0.240	3.05	6.10	
Р	0.100	0.120	2.54	3.05	
R (DIA)	0.143	0.156	3.63	3.96	
		TO	-220-2 (F	REV: R1)	


R3 (15-June 2016)

www.centralsemi.com



CSIC10-1200

SILICON CARBIDE SCHOTTKY RECTIFIER 10 AMP, 1200 VOLT

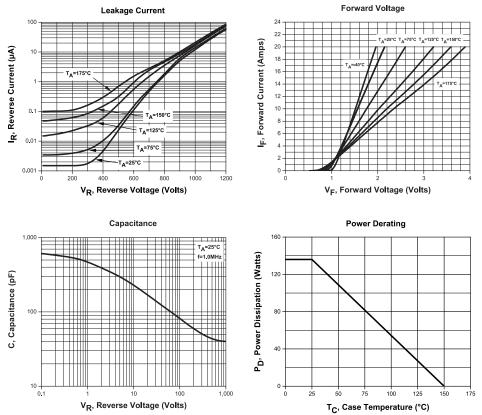

TYPICAL ELECTRICAL CHARACTERISTICS

www.centralsemi.com

R3 (15-June 2016)

www.centralsemi.com

OUTSTANDING SUPPORT AND SUPERIOR SERVICES

PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- · Consolidated shipping options

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities

Special wafer diffusions

· Custom product packing

- PbSn plating options
- Package details
- Application notes
- · Application and design sample kits

Custom bar coding for shipments

Custom product and package development

REQUESTING PRODUCT PLATING

- 1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
- If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp. 145 Adams Avenue Hauppauge, NY 11788 USA Main Tel: (631) 435-1110 Main Fax: (631) 435-1824 Support Team Fax: (631) 435-3388 www.centralsemi.com

Worldwide Field Representatives: www.centralsemi.com/wwreps

Worldwide Distributors: www.centralsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: <u>www.centralsemi.com/terms</u>





http://www.centralsemi.com

Product End of Life Notification

PDN ID:	PDN01142
Notification Date:	2/04/20
Last Buy Date:	8/04/20
Last Shipment Date	2/04/21

Summary:All silicon carbide Schottky rectifiers in the DPAK-2L and TO-220-2 packages are discontinued and now classified as End of Life (EOL). However, Central will continue to support these products in bare die form.

Although Central Semiconductor Corp. makes every effort to continue to produce devices that have been proclaimed EOL (End of Life) by other manufacturers, it is an accepted industry practice to discontinue certain devices when customer demand falls below a minimum level of sustainability. Accordingly, the following product(s) have been transitioned to End of Life status as part of Central's ongoing Product Management Process. Any replacement products are noted below. The effective date for placing last purchase orders will be six (6) months from the date of this notice and twelve (12) months from the notice date for final shipments, and minimum order quantities may apply. The last purchase and shipment dates may be extended if inventory is available.

Central Part Number	Replacement
CSICD05-1200 BK	N/A, Stock Only
CSICD05-1200 TR13	N/A, Stock Only
CSICD10-1200 BK	N/A, Stock Only
CSICD10-1200 TR13	N/A, Stock Only
CSICD10-650 BK	N/A, Stock Only
CSICD10-650 TR13	N/A, Stock Only
CSIC10-1200	N/A, Stock Only
CSIC10-1200 SL	N/A, Stock Only
CSIC10-650 SL	N/A, Stock Only

Central would be happy to assist you by providing additional information or technical data to help locate an alternate source if we have no replacement available. Please email your requests to engineering@centralsemi.com.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.