



Circuit breaker size S00 for transformer protection A-release 7...10 A N-release 208 A screw terminal Standard switching capacity with transverse auxiliary switches 1 NO+1 NC

|  |                            |
|--|----------------------------|
| <b>product brand name</b>  | SIRIUS                     |
| <b>product designation</b>   | Circuit breaker            |
| <b>design of the product</b>   | For transformer protection |
| <b>product type designation</b>  | 3RV2                       |
| <b>General technical data</b>  |                            |
| <b>size of the circuit-breaker</b>   | S00                        |
| <b>size of contactor can be combined company-specific</b>                                  | S00, S0                    |
| product extension auxiliary switch   | Yes                        |
| <b>power loss [W] for rated value of the current</b>                                       |                            |
| • at AC in hot operating state   | 9.25 W                     |
| • at AC in hot operating state per pole  | 3.1 W                      |
| insulation voltage with degree of pollution 3 at AC rated value                            | 690 V                      |
| <b>surge voltage resistance rated value</b>  | 6 kV                       |
| shock resistance according to IEC 60068-2-27   | 25g / 11 ms                |
| <b>mechanical service life (switching cycles)</b>  |                            |
| • of the main contacts typical   | 100 000                    |
| • of auxiliary contacts typical  | 100 000                    |
| electrical endurance (switching cycles) typical  | 100 000                    |
| <b>reference code according to IEC 81346-2</b>   | Q                          |
| <b>Substance Prohibitive (Date)</b>  | 10/01/2009                 |
| <b>Ambient conditions</b>  |                            |
| installation altitude at height above sea level maximum                                    | 2 000 m                    |
| <b>ambient temperature</b>   |                            |
| • during operation   | -20 ... +60 °C             |
| • during storage   | -50 ... +80 °C             |
| • during transport   | -50 ... +80 °C             |
| relative humidity during operation   | 10 ... 95 %                |
| <b>Main circuit</b>  |                            |
| <b>number of poles for main current circuit</b>  | 3                          |
| <b>adjustable current response value current of the current-dependent overload release</b> | 7 ... 10 A                 |
| <b>operating voltage</b>   |                            |
| • rated value  | 20 ... 690 V               |
| • at AC-3 rated value maximum  | 690 V                      |
| • at AC-3e rated value maximum   | 690 V                      |
| <b>operating frequency rated value</b>   | 50 ... 60 Hz               |
| <b>operational current rated value</b>   | 10 A                       |
| <b>operational current</b>   |                            |
| • at AC-3 at 400 V rated value   | 10 A                       |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• at AC-3e at 400 V rated value</li> </ul>   | 10 A   |
| <b>operating power</b>  |  |
| <ul style="list-style-type: none"> <li>• at AC-3 <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> <li>• at AC-3e <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> </ul> | 2.2 kW<br>4 kW<br>5.5 kW<br>7.5 kW<br><br>2.2 kW<br>4 kW<br>5.5 kW<br>7.5 kW |
| <b>operating frequency</b>  |  |
| <ul style="list-style-type: none"> <li>• at AC-3 maximum</li> <li>• at AC-3e maximum</li> </ul>   | 15 1/h<br>15 1/h   |
| <b>Auxiliary circuit</b>  |  |
| <b>design of the auxiliary switch</b>   | transverse   |
| <b>number of NC contacts for auxiliary contacts</b>   | 1  |
| <b>number of NO contacts for auxiliary contacts</b>   | 1  |
| number of CO contacts for auxiliary contacts  | 0  |
| <b>operational current of auxiliary contacts at AC-15</b>   |  |
| <ul style="list-style-type: none"> <li>• at 24 V</li> <li>• at 120 V</li> <li>• at 125 V</li> <li>• at 230 V</li> </ul>   | 2 A<br>0.5 A<br>0.5 A<br>0.5 A   |
| <b>operational current of auxiliary contacts at DC-13</b>   |  |
| <ul style="list-style-type: none"> <li>• at 24 V</li> <li>• at 60 V</li> </ul>  | 1 A<br>0.15 A  |
| <b>Protective and monitoring functions</b>  |  |
| <b>product function</b>   |  |
| <ul style="list-style-type: none"> <li>• ground fault detection</li> <li>• phase failure detection</li> </ul>   | No<br>Yes  |
| <b>trip class</b>   | CLASS 10   |
| <b>design of the overload release</b>   | thermal  |
| <b>breaking capacity maximum short-circuit current (I<sub>cu</sub>)</b>   |  |
| <ul style="list-style-type: none"> <li>• at AC at 240 V rated value</li> <li>• at AC at 400 V rated value</li> <li>• at AC at 500 V rated value</li> <li>• at AC at 690 V rated value</li> </ul>  | 100 kA<br>100 kA<br>42 kA<br>6 kA  |
| <b>breaking capacity operating short-circuit current (I<sub>cs</sub>) at AC</b>   |  |
| <ul style="list-style-type: none"> <li>• at 240 V rated value</li> <li>• at 400 V rated value</li> <li>• at 500 V rated value</li> <li>• at 690 V rated value</li> </ul>  | 100 kA<br>100 kA<br>42 kA<br>4 kA  |
| response value current of instantaneous short-circuit trip unit   | 208 A  |
| <b>UL/CSA ratings</b>   |  |
| <b>full-load current (FLA) for 3-phase AC motor</b>   |  |
| <ul style="list-style-type: none"> <li>• at 480 V rated value</li> <li>• at 600 V rated value</li> </ul>  | 10 A<br>10 A   |
| <b>yielded mechanical performance [hp]</b>  |  |
| <ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> </ul> </li> <li>• for 3-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> </ul> </li> </ul>               | 0.5 hp<br>1.5 hp<br><br>2 hp<br>3 hp<br>5 hp<br>10 hp                        |

|  |  |  |
|--|--|--|
| <b>contact rating of auxiliary contacts according to UL</b>  | C300 / R300  |  |
| <b>Short-circuit protection</b>  |  |  |
| <b>product function short circuit protection</b>   | Yes  |  |
| <b>design of the short-circuit trip</b>  | magnetic   |  |
| <b>design of the fuse link</b>   | Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current I <sub>k</sub> < 400 A)   |  |
| <ul style="list-style-type: none"> <li>for short-circuit protection of the auxiliary switch required</li> </ul>  |  |  |
| <b>design of the fuse link for IT network for short-circuit protection of the main circuit</b>   | gL/gG 50 A<br>gL/gG 40 A<br>gL/gG 40 A   |  |
| <ul style="list-style-type: none"> <li>at 400 V</li> </ul>   |  |  |
| <ul style="list-style-type: none"> <li>at 500 V</li> <li>at 690 V</li> </ul>   |  |  |
| <b>Installation/ mounting/ dimensions</b>  |  |  |
| <b>mounting position</b>   | any  |  |
| <b>fastening method</b>  | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715   |  |
| <b>height</b>  | 97 mm  |  |
| <b>width</b>   | 45 mm  |  |
| <b>depth</b>   | 97 mm  |  |
| <b>required spacing</b>  | 30 mm<br>30 mm<br>9 mm<br>30 mm<br>30 mm<br>9 mm<br>30 mm<br>30 mm<br>9 mm<br>50 mm<br>50 mm<br>0 mm<br>30 mm<br>0 mm<br>50 mm<br>50 mm<br>0 mm<br>30 mm<br>0 mm |  |
| <ul style="list-style-type: none"> <li>for grounded parts at 400 V <ul style="list-style-type: none"> <li>downwards</li> <li>upwards</li> <li>at the side</li> </ul> </li> <li>for live parts at 400 V <ul style="list-style-type: none"> <li>downwards</li> <li>upwards</li> <li>at the side</li> </ul> </li> <li>for grounded parts at 500 V <ul style="list-style-type: none"> <li>downwards</li> <li>upwards</li> <li>at the side</li> </ul> </li> <li>for live parts at 500 V <ul style="list-style-type: none"> <li>downwards</li> <li>upwards</li> <li>at the side</li> </ul> </li> <li>for grounded parts at 690 V <ul style="list-style-type: none"> <li>downwards</li> <li>upwards</li> <li>backwards</li> <li>at the side</li> <li>forwards</li> </ul> </li> <li>for live parts at 690 V <ul style="list-style-type: none"> <li>downwards</li> <li>upwards</li> <li>backwards</li> <li>at the side</li> <li>forwards</li> </ul> </li> </ul> |  |  |
| <b>Connections/ Terminals</b>  |  |  |
| <b>type of electrical connection</b>   |  | screw-type terminals<br>screw-type terminals   |
| <ul style="list-style-type: none"> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> </ul>  |  |  |
| <b>arrangement of electrical connectors for main current circuit</b>   |  | Top and bottom   |
| <b>type of connectable conductor cross-sections</b>  |  | 2x (0,75 ... 2,5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup><br>2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (18 ... 14), 2x 12 |
| <ul style="list-style-type: none"> <li>for main contacts <ul style="list-style-type: none"> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul> </li> <li>at AWG cables for main contacts</li> </ul>  |  |  |
| <b>type of connectable conductor cross-sections</b>  |  |  |
| <ul style="list-style-type: none"> <li>for auxiliary contacts</li> </ul>   |  |  |

|   |   |
|---|---|
| — solid or stranded                                 | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ) |
| — finely stranded with core end processing          | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ) |
| • at AWG cables for auxiliary contacts              | 2x (20 ... 16), 2x (18 ... 14)  |
| <b>tightening torque</b>                            |   |
| • for main contacts with screw-type terminals       | 0.8 ... 1.2 N·m   |
| • for auxiliary contacts with screw-type terminals  | 0.8 ... 1.2 N·m   |
| <b>design of screwdriver shaft</b>                  | Diameter 5 to 6 mm  |
| <b>size of the screwdriver tip</b>                  | Pozidriv size 2   |
| <b>design of the thread of the connection screw</b> |   |
| • for main contacts                                 | M3  |
| • of the auxiliary and control contacts             | M3  |

| Safety related data   |  |
|---|--|
| <b>B10 value</b>  |  |
| • with high demand rate according to SN 31920                           | 5 000  |
| <b>proportion of dangerous failures</b>                                 |  |
| • with low demand rate according to SN 31920                            | 50 %   |
| • with high demand rate according to SN 31920                           | 50 %   |
| <b>failure rate [FIT]</b>   |  |
| • with low demand rate according to SN 31920                            | 50 FIT   |
| T1 value for proof test interval or service life according to IEC 61508 | 10 y   |
| <b>protection class IP on the front according to IEC 60529</b>          | IP20   |
| <b>touch protection on the front according to IEC 60529</b>             | finger-safe, for vertical contact from the front |
| display version for switching status                                    | Handle   |

#### Certificates/ approvals

|                          |                           |
|--------------------------|---------------------------|
| General Product Approval | Declaration of Conformity |
|--------------------------|---------------------------|



[Confirmation](#)



|                           |                   |                   |
|---------------------------|-------------------|-------------------|
| Declaration of Conformity | Test Certificates | Marine / Shipping |
|---------------------------|-------------------|-------------------|



EG-Konf.

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



ABS



BUREAU VERITAS



DNV

|                   |       |
|-------------------|-------|
| Marine / Shipping | other |
|-------------------|-------|



LRS



PRS



RINA



RMRS

[Confirmation](#)



VDE

#### Railway

[Vibration and Shock](#)

[Confirmation](#)

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2411-1JA15>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2411-1JA15>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2411-1JA15>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV2411-1JA15&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2411-1JA15&lang=en)

Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2411-1JA15/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2411-1JA15&objecttype=14&gridview=view1>

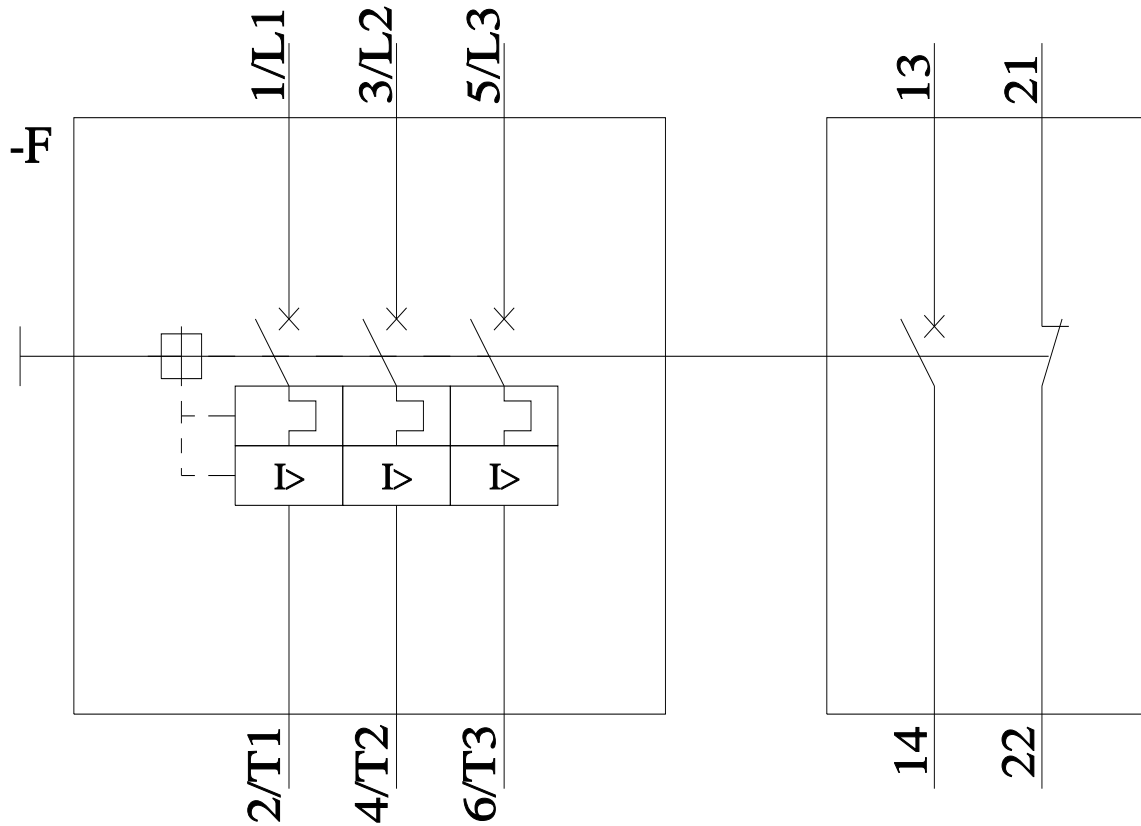

last modified:

6/25/2022