

6

5

4

3

2

1

E

E

D

D

C


C

B

B

A

A

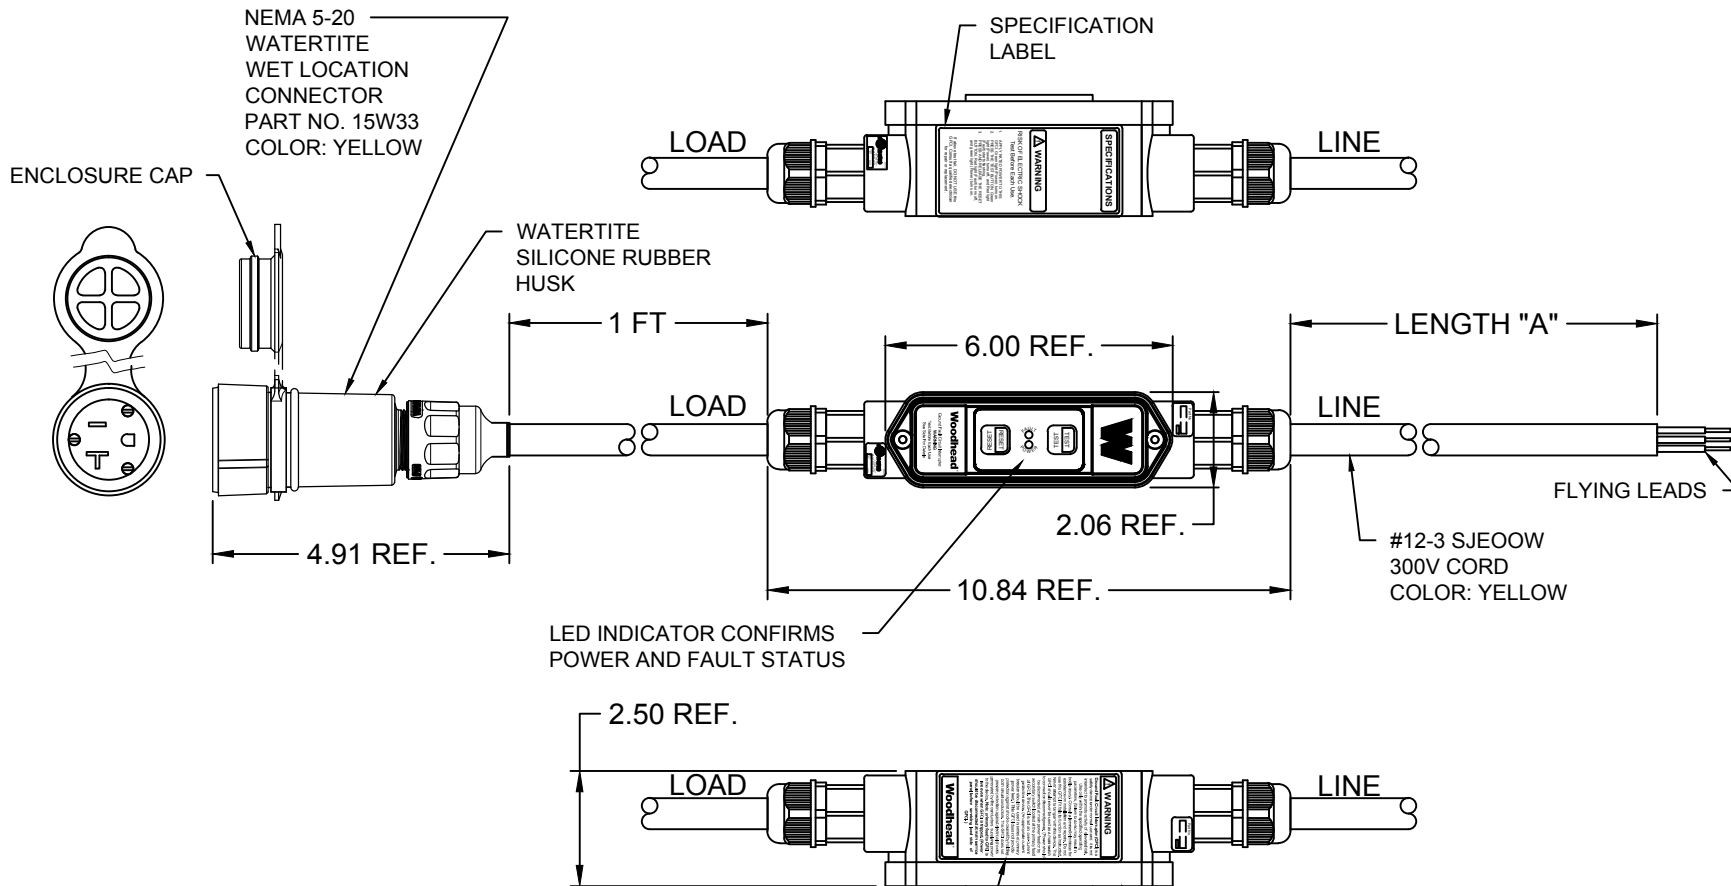

LED INDICATOR CONFIRMS  
POWER AND FAULT STATUS

WARNING LABEL

RUGGED, RAINPROOF,  
UV-STABILIZED ENCLOSURE  
RESISTS ABUSE, SUNLIGHT,  
OILS AND CHEMICALS

**TECHNICAL:**  
RATED VOLTAGE: 120VAC  
OPERATING VOLTAGE RANGE: 85% TO 110% OF RATED  
CURRENT: UP TO 20 AMPS OR DEVICE RATING  
FREQUENCY: 60Hz  
TRIP LEVEL: 5 ± 1mA  
PHASE: SINGLE  
RESPONSE TIME: 25 MS MAX.  
AGENCY APPROVAL: NONE

120VAC  
85% TO 110% OF RATED  
UP TO 20 AMPS OR DEVICE RATING  
60Hz  
5 ± 1mA  
SINGLE  
25 MS MAX.  
NONE

MATERIAL NO.	ENGINEERING NO.	LENGTH "A"	POWER-UP
1301530278	20052-0PM18	17 FT	MANUAL
1301530280	20052-0PM30	30 FT	MANUAL
1301530281	20052-0PM45	45 FT	MANUAL
1301530282	20052-0PM60	60 FT	MANUAL

ADD PARTS -280, 281, & 282	DESCRIPTION
EC NO: IFC2019-0185	
DRWN: BPATTERS 10/22/18	
CHKD: ---	
APPR: HKNEELAN 2018/03/28	
REV	
C	

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm
	INCH
4 PLACES	±---
3 PLACES	±---
2 PLACES	±---
1 PLACE	±---
ANGULAR ± 5°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE INCH ONLY	
DRAWN BY	DATE
BPATTERS	2018/03/20
CHECKED BY	DATE
DWILLIAM	---
APPROVED BY	DATE
HKNEELAN	2018/03/28
MATERIAL NO.	
SEE TABLE	
SIZE	
A	

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
NTS	INCH	
TITLE		
120 VAC 20A IN-LINE GFCI MANUAL 17' FLYING LEADS 1' SECONDARY NEMA 5-20		
MOLEX INCORPORATED		
MATERIAL NO.	DOCUMENT NO.	SHEET NO.
	SD-130153-278	1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		