


# Steward

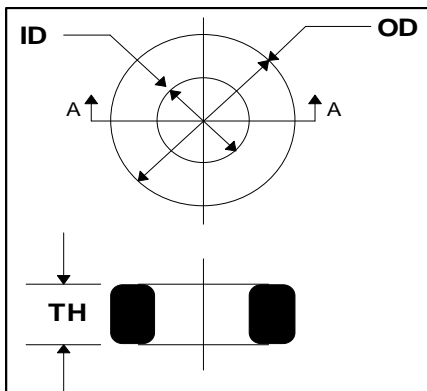

CORE DIMENSIONS				28T0119-100			
UNCOATED CORE							
	MM	INCHES		MM	INCHES		
OD	3.05	(.120)	±	.13	(.005)		
ID	1.27	(.050)	±	.13	(.005)		
TH	.76	(.030)	±	.13	(.005)		
SINGLE PARYLENE COATING				28T0119-10P			
OD	3.07	(.121)	±	.13	(.005)		
ID	1.24	(.049)	±	.13	(.005)		
TH	.79	(.031)	±	.13	(.005)		

WEIGHT / K 0.05 LBS  
 INITIAL PERMEABILITY 850

ELECTRICAL SPECIFICATION								
	MIN	NOM	MAX	FREQ.	VOLT.			
	(μH)	(μH)	(μH)	(kHz)	(V)	MIN TOL.	MAX TOL.	URNS
L	.091	.113	.136	100	≤ .00028	(-20%)	(+20%)	1
Q	REF	-	-	100	≤ .00028	-	-	1
Net Impedance	MIN	NOM	FREQ.					
	(Ω)	(Ω)	(MHz)		URNS			
Z1 (Ref.)	3.58	4.78	25		-			
Z2	6.77	9.02	150		-			

COATING SPECIFICATIONS			
	Max. Coating	Min. DLB	
TYPE	(mils.)	VAC	TEST FORCE (LB)
PARYLENE	0.5	1000	0.09

NOTES:



Rev	Description	Date	INT
A	Original Draft	7/6/1995	JBE
B	UPDATE PRINT TO NEW FORMAT	7/6/1995	JBE
C	UPDATE ELECT & Z SPECS	5/6/1996	BAC
D	TRANSFER TO LOTUS NOTES	11/12/1997	IS
E	REVISED GAUSS TO 10	12/17/2003	TPM
F	REMOVE 10Q SPECS CHANGE P/N	9/30/2005	JRK
G	Revised Template	6/1/2006	WMM

Date: 6/1/2006	DWG # 28T0119-10P-G	Rev:
Drawn By: WMM	Title # 28T0119-10P	G

Steward This document contains information which is proprietary to Steward. No production or publication of this document in whole or in part shall be made without written authorization from Steward.

**UNCONTROLLED DOCUMENT**