
T	۵	т	m	D	0





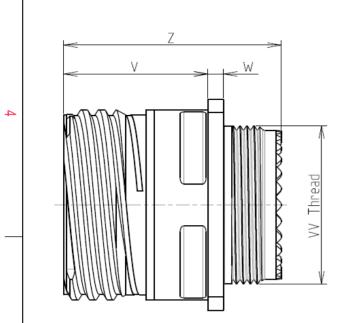

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 13

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Passivated -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range

: 500 hours

: 41.72 g ± 10%

8D 0

G

13

Κ

04

В


F

А

Connector dimension		
Dim	Nominal	
Р	3.25±0.2	
РР	4.93±0.2	
R1	23.01	
R2	20.62	
S	28.6±0.3	
V	20.83+0/-1.25	
W	2.1/2.5	
Z	31.5 Max	
VV THREAD	M18x1-6g	

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

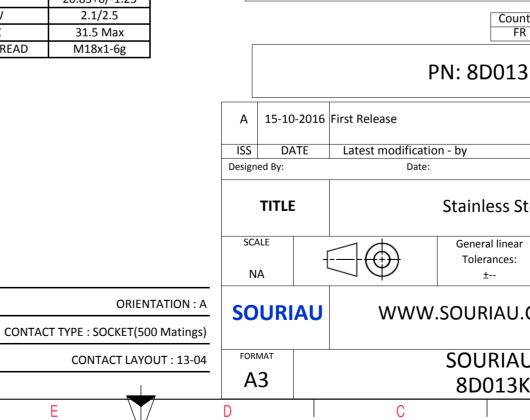

			1	
σ		Þ		
R			4	
AS EXAMPLE			3	
any non-conform which does not control of the Parties or indation, technical r untry Juris FR 3KO4BA	omply with by a third party	t	2	
	CUSTOMER DRA	MOD N°		
Steel Receptacle 8D series				
ar	NPRDS / PROJI 859	ECT	1	
J.COM	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission			
U DRG N° K04BA-C		SHEET		
B		A	J	
0	I			

-	Т	۵	н т	m		0	
		Contact Layout					Panel Cutout
4	,	x $(\begin{array}{c} \begin{array}{c} & & \\ & \\ & \\ & \\ & \\ & \\ & \\ & \\ & \\ $			Â	SQUARE FLANGE RECEPTACLE (TYPE 0 REAR MOUNTING	
	Controposition A B C D Shell Arrangement N Size no. N 13 -4	n ID (mm) (mm) +.000 (0.00) +.150 (3.81) +.146 (3.71) +.035 (0.89) +.000 (0.00) 083 (2.11) 146 (3.71) +.035 (0.89)			¥		
c						Di Ø Ø R Ø	A A 1
	+					SOURIAU shall not be due to a use of the the Specifications issue	e Products whi ed by either of
N						(professional r	Country FR
					A 15-10-20 ISS DATE	PN: 16 First Release Latest modification - by	8D013K
					Designed By: TITLE SCALE	Date:	iinless Ste
<u> </u>							eneral linear Tolerances: ± URIAU.CO
			_	- 1	FORMAT A3	8	DURIAU 3D013K0
	Н	G	F	E	D	C	

