



Technical Data Sheet

PEWAN102-20SF

Features

- 7 GHz to 11 GHz
- WR-102 Waveguide Band

- 20 dBi Nominal Gain
- SMA Female Connector

Applications

- Antenna Measurements
- Wireless Communication
- Laboratory Use

- Microwave Radio Systems
- · Radome Testing
- Automotive Antenna Test
- Solutions
- · Radar Cross Section
- Satellite Antenna Testing

Description

The PEWAN102-20SF standard gain horn antenna (also known as waveguide horn) from Pasternack is part of our comprehensive selection of waveguide antennas. This standard gain horn is mated with a WR-102 to SMA Female waveguide to coaxial adapter and operates from 7 GHz to 11 GHz.

Our PEWAN102-20SF standard gain horn antenna has a nominal gain of 20 dBi with a Horizontal and Vertical HPBW (Half Power Beam Width) of 17.5 dB and 17.3 dB respectively. Pasternack's SMA Female to WR-102 standard gain horns are available in 10, 15 and 20 dBi models with pyramidal shape and connectorized input.

Waveguide antennas, such as the PEWAN102-20SF are used in a wide variety of applications due to the high-power handling capability, low loss, high directivity, and near constant electrical performance. Our WR-102 waveguide antennas with SMA Female interface is part of over 40,000 RF, microwave and millimeter wave components from Pasternack available worldwide and Ship same day.

Configuration

Design Coaxial Interface WR-102 Standard Gain Horn SMA Female

Electrical Specifications

Minimum	Typical	Maximum	Units
7		11	GHz
	20		dBi
	17.5		Degrees
	17.3		Degrees
		1.25:1	
	Minimum 7	7 20 17.5	7 11 20 17.5 17.3

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-102 Standard Gain Horn with 20 dBi gain, SMA Female connector PEWAN102-20SF







Technical Data Sheet

PEWAN102-20SF

Mechanical Specifications

Size

 Length
 13.063 in [331.8 mm]

 Width
 4.988 in [126.7 mm]

 Height
 3.701 in [94.01 mm]

 Weight
 1.161 lbs [526.62 g]

RF Connector

Type SMA Female

Waveguide Interface

Waveguide Size WR-102

Environmental Specifications

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-102 Standard Gain Horn with 20 dBi gain, SMA Female connector PEWAN102-20SF








Technical Data Sheet

PEWAN102-20SF

Typical Performance Data

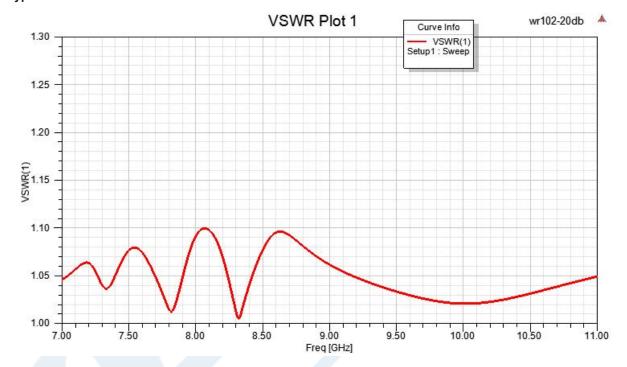

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-102 Standard Gain Horn with 20 dBi gain, SMA Female connector PEWAN102-20SF








Technical Data Sheet

PEWAN102-20SF

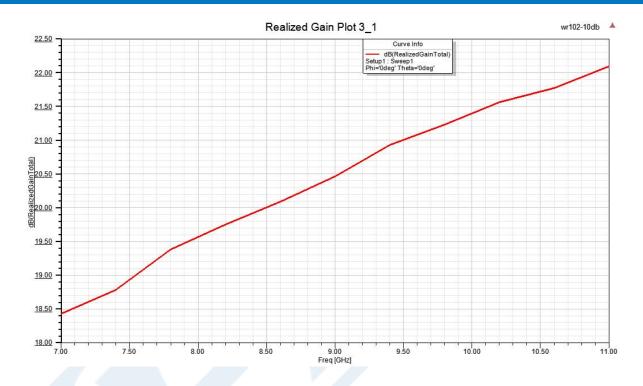


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-102 Standard Gain Horn with 20 dBi gain, SMA Female connector PEWAN102-20SF

PEWAN102-20SF REV 1








Technical Data Sheet


PEWAN102-20SF

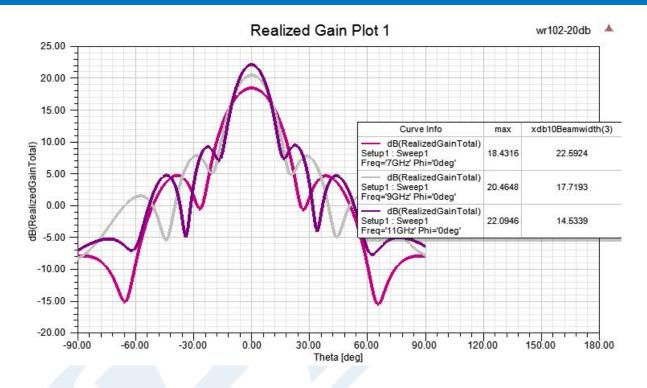

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-102 Standard Gain Horn with 20 dBi gain, SMA Female connector PEWAN102-20SF








Technical Data Sheet

PEWAN102-20SF

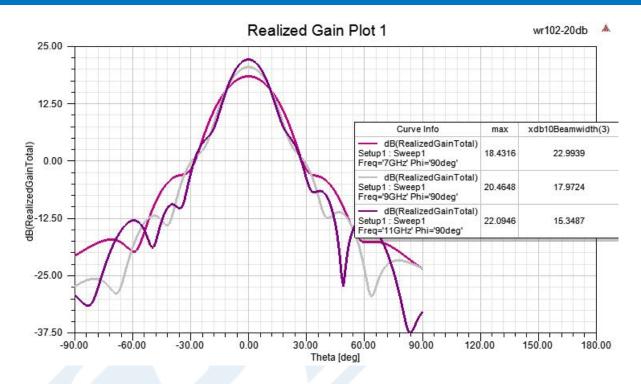

WR-102 Standard Gain Horn with 20 dBi gain, SMA Female connector from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-102 Standard Gain Horn with 20 dBi gain, SMA Female connector PEWAN102-20SF

URL:

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.



PEWAN102-20SF CAD DrawingWR-102 Standard Gain Horn with 20 dBi gain, SMA Female connector

