


Eaton 9PX 3000VA 2700W 208V Online Double-Conversion UPS - L6-20P, 8 C13, 2 C19 Outlets, Lithium-ion Battery, Cybersecure Network Card Option, 2U Rack/Tower

MODEL NUMBER: 9PX3000GRT-L

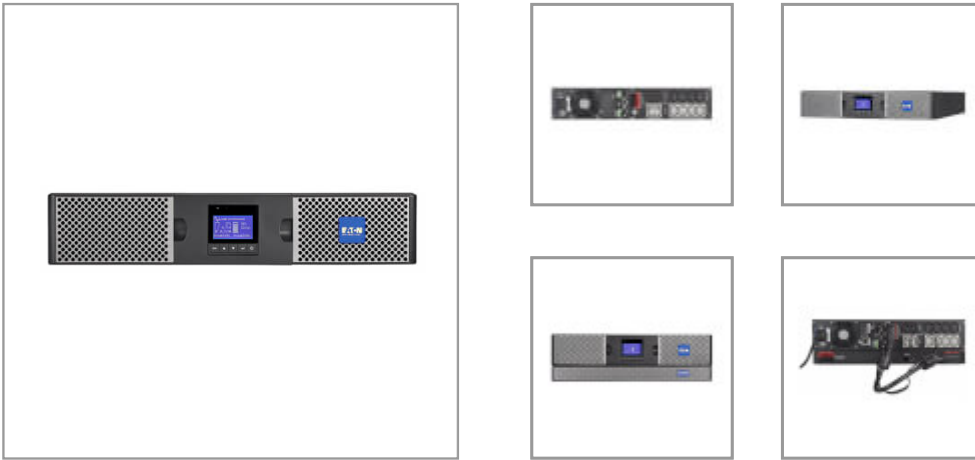

Provides sine wave output, complete battery backup and power protection for mission-critical IT installations, edge networks and other advanced network applications.

Features

3kVA/2.7kW/208V Long-Term Battery Backup for IT Installations and Edge Networks

This 9PX rack-mount online double-conversion UPS system provides reliable, low-maintenance battery backup and AC power protection against blackouts, brownouts, surges and line noise that can damage valuable IT equipment or destroy data. Ideal for locations that are difficult to access or infrequently maintained, the 9PX3000GRT-L is an efficient “set it and forget it” solution. It’s ideal power management for education, commercial, financial or healthcare networking components, including Cisco switches and servers.

Reliable, Expandable Battery Backup Keeps You Operational Through Power Outages

The hot-swappable maintenance-free lithium-ion battery modules have a service life of 8 to 10 years. They allow you to work through short power failures and give you enough time to safely save files and shut down your system in case of a prolonged blackout. Exclusive ABM technology increases battery life by 50 percent and closely monitors battery health to provide advanced notice when batteries need replacing. These lithium iron phosphate (LFP) batteries provide 80 to 120 percent more runtime at full load than equivalent lead-acid UPS systems while weighing up to 40 percent less, reducing the overall UPS weight.

Supports External Batteries for Scalable Extended Runtime

For mission-critical applications demanding continuous uptime, the UPS supports the connection of up to four expanded battery modules (9PXEBM72RT-L, sold separately) for hours of extended runtime.

Optional Gigabit Network Interface Offers 24/7 Remote Access

The NETWORK-M2 network card (sold separately or as a network card bundle) enables full remote configuration and management, including load shedding, reboots of connected equipment and safe shutdowns. UPS firmware can also be flashed remotely through the NETWORK-M2 without dropping the load, so you don’t have to plan for downtime. The card meets both UL 2900-1 and IEC 62443-4-2 standards for cybersecurity, which were developed to address the vulnerability of connected devices to known malware/exploits and to protect business from these risks. The optional Environmental Monitoring Probe Gen 2 (EMPDT1H1C2, sold separately) provides a variety of environmental monitoring capabilities, including temperature and humidity conditions.

Highlights

- Keeps equipment running during outages to allow time for file saves and safe shutdown
- Improved lithium-ion batteries have service life up to 10 years – set it and forget it!
- Provides 80% to 120% more runtime at full load than equivalent lead-acid UPS systems
- Interactive LCD interface keeps you updated on critical load information in real time
- Optional expanded battery modules allow extended runtime to keep equipment powered

Package Includes

- 3000VA 2700W 208V 9PX Online Double-Conversion UPS with 10 Outlets
- Detachable C19 to NEMA L6-20P power cord, 6 ft. (1.8 m)
- USB cable
- RS-232 cable
- Rack-mounting hardware
- Tower support stands
- Safety guide
- Quick Start Guide



Powering Business Worldwide

1000 Eaton Boulevard
Cleveland, OH 44122
United States

10 Outlets Protect Your Connected Components

Two C19 and eight C13 managed outlets provide connected equipment with pure sine wave AC output and allow you to monitor power consumption down to the outlet group level. Power provided by these outlets is filtered to protect connected equipment against damaging surges and line noise. Five outlets are grouped into two load banks that let you shed non-critical loads to extend runtime for critical loads.

Rotating LCD Interface Keeps You Informed at a Glance

The high-contrast front-panel LCD provides control settings and critical information to help diagnose any issues. The interface rotates to accommodate both rack-mount and tower configurations, and it tilts up to 45 degrees for more comfortable viewing.

Advanced Communications Ports Allow for Automatic Saves and Shutdowns

RS-232 and USB ports connect to a serial-enabled device for a variety of communication options (cables are included). A dry-contact relay port can be programmed through the LCD to provide reliable communications to automation and industrial components. The RPO/ROO port permits emergency shutdown or remote restart of all connected equipment.

Versatile Installation Options

You can mount the 9PX3000GRT-L in just 2U of space in an EIA-standard 19-inch rack using the included 4-post rail kit or an optional 2-post rail kit (RK2PC, sold separately). You can also adapt it for tower installation using the included support stands. The detachable six-foot C19 to NEMA L6-20P power cable connects to a compatible AC outlet.

Specifications

| OVERVIEW | |
|------------------------------------|---|
| UPC Code | 743172105493 |
| UPS Type | On-Line |
| INPUT | |
| Input Phase | Single-Phase |
| Rated input current (Maximum Load) | 14.42A |
| Nominal Input Voltage(s) Supported | 200V AC; 208V AC; 220V AC; 230V AC; 240V AC |
| UPS Input Connection Type | L6-20P |
| UPS Input Cord Length (ft.) | 6 |
| UPS Input Cord Length (m) | 1.8 |
| Plug Type | L6-20P |
| OUTPUT | |
| Output Capacity (VA) | 3000 |
| Output Capacity (kVA) | 3 |
| Output Capacity (Watts) | 2700 |
| Output Capacity (kW) | 2.7 |
| Power Factor | 0.9 |
| Crest Factor | 3:1 |



Powering Business Worldwide

1000 Eaton Boulevard
Cleveland, OH 44122
United States

| | |
|--|--|
| Nominal Voltage Details | 200V, 208V, 220V, 230V, 240V |
| Frequency Compatibility | 50 / 60 Hz |
| Output AC Waveform (Battery Mode) | Pure Sine wave |
| Nominal Output Voltage(s) Supported | 200V; 208V; 220V; 230V; 240V |
| Output Receptacles | (8) C13; (2) C19 |
| Individually Controllable Load Banks | Yes |
| BATTERY | |
| Battery Type | Lithium Ion |
| Runtime Full Load (min.) | 10.5 min. |
| Runtime Half Load (min.) | 21 min. |
| Expandable Runtime | Yes |
| Expandable Runtime Description | Add up to 4 extended battery modules (EBM). Part number <a >9pxebm72rt-l<="" a="" href="/tripplite.eaton.com/eaton-9px-external-battery-lithium-72v-1u-9PXEBM72RT-L"> |
| DC System Voltage (VDC) | 72 |
| Battery Access | Battery access door |
| Battery Replacement Description | Hot-swappable, replaceable batteries. Part number EBP-1609-L |
| Battery Management | Integrated battery management system (BMS) for temperature regulation and life cycle monitoring |
| USER INTERFACE, ALERTS & CONTROLS | |
| Front Panel LCD Display | LCD graphical display |
| Switches | RPO / ROO |
| Alarm Cancel Operation | Press ESC to silence the alarm |
| Audible Alarm | Audible alarm indicates utility failure, low-battery, overload, other UPS/Battery fault or remote shutdown conditions |
| LED Indicators | 4 status-indicating LEDs |
| SURGE / NOISE SUPPRESSION | |
| UPS AC Suppression Joule Rating | 296 |
| UPS AC Suppression Response Time | 0 ms |
| EMI / RFI AC Noise Suppression | Yes |
| PHYSICAL | |
| Primary Form Factor | Rackmount; Tower |
| Rack Height | 2U |
| Cooling Method | Fan |



Powering Business Worldwide

1000 Eaton Boulevard
Cleveland, OH 44122
United States

| | |
|---|--|
| Installation Form Factors Supported with Included Accessories | 4 post 19 inch rackmount; Tower |
| Installation Form Factors Supported with Optional Accessories | 2 post rackmount (RK2PC) |
| Minimum Required Rack Depth (cm) | 68.58 |
| Minimum Required Rack Depth (inches) | 27 |
| Unit Dimensions (hwd / in.) | 3.410 x 17.320 x 23.820 |
| Unit Weight (lbs.) | 50.270 |
| Unit Weight (kg) | 22.80 |
| ENVIRONMENTAL | |
| Operating Temperature Range | 32° to 104°F (0° to 40°C) |
| Relative Humidity | 0-96% non-condensing |
| AC Mode Efficiency Rating (100% Load) | 94 |
| AC Economy Mode Efficiency Rating (100% Load) | 98 |
| COMMUNICATIONS | |
| Network Management Cards | NETWORK-M2 ; INDGW-M2 ; RELAY-MS |
| Communications Interface | RS-232; USB |
| FEATURES & SPECIFICATIONS | |
| High Availability UPS Features | Automatic Voltage Regulation (AVR); Expandable battery backup; Hot swappable batteries; On-Line/Double-Conversion; Pure sine wave output; Remote management; Surge/noise protection; Zero transfer time |
| APPLICATIONS | |
| UPS Applications | Mission Critical Applications |
| STANDARDS & COMPLIANCE | |
| Product Certifications | cTUVus; NOM (Mexico); EN 62040-2 |
| Product Compliance | CE (Europe); FCC Part 15 Class B (USA); RoHS |
| WARRANTY & SUPPORT | |
| Product Warranty Period (U.S. & Canada) | 5-year limited warranty |



Powering Business Worldwide

1000 Eaton Boulevard
Cleveland, OH 44122
United States



Powering Business Worldwide

© 2023 Eaton. All Rights Reserved.
Eaton is a registered trademark. All other trademarks
are the property of their respective owners.