

Ratings

Voltage: 300 V
 Temperature: -80~200 °C
 Flammability: VW-1
 Oil resistance: 60 °C
 ≥50% elongation and tensile strength after aging

Conductor

Conductor count: 1
 Gauge: 12 AWG 3.3 mm²
 Material: tinned copper strands
 Strand size: Ø0.47 mm x 19
 Resistance at 20 °C: 5.64 Ω /km max


Insulator

Material: Fluorinated ethylene propylene (FEP)
 Color: purple
 Diameter: Ø3.01 ±0.15 mm
 Nominal thickness: 0.33 mm
 Resistance at 20 °C: 2.5 MΩ /kft min

Wire marking: E339579 UL AWM STYLE 1332 12AWG 200°C 300V
 VW-1 --- cUL AWM I A/B 200°C 300V FT1 TENSILITY

Mechanical Tests

After aging at 232±1°C for 7 days
 Minimum tensile strength 1.76 kgf/mm²
 Minimum elongation 200% original

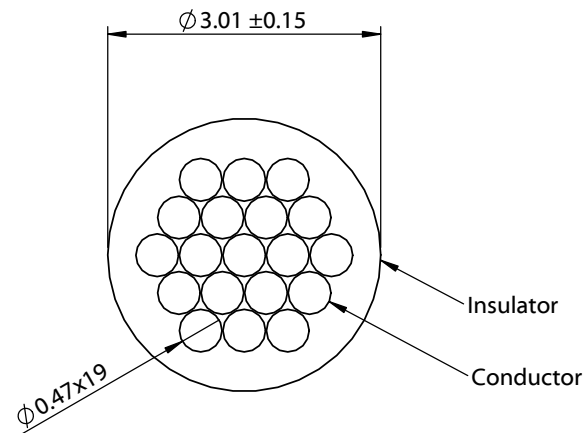

Revision:	Date:	Description:
A	05/20/2022	Initial release

Prepared:	MP <small>Digitally signed by MP Date: 2022.05.24 12:00:32 -07'00'</small>
Verified:	PB <small>Digitally signed by PB Date: 2022.05.27 12:09:32 -07'00'</small>
Dimensions are in millimeters.	
Tolerances:	
X: ± 0.5 mm	
X.X: ± 0.3 mm	
X.XX: ± 0.05 mm	

Notes:
RoHS compliant
Function test: no open, no short circuit, no Intermittent
Description:
Wire, hook-up, TS, 12 AWG, UL 1332, 300V, 200C, 3.01 mm, FEP, purple

TENSILITY	
<small>tel</small> 1.541.323.3228	<small>800</small> 877.670.7118
<small>fax</small> 1.541.323.4202	<small>web</small> tensility.com
Size:	Part number:
A	30-02518
Scale: 12:1	Sheet 1 of 1