
—	G	нт. П	m	O





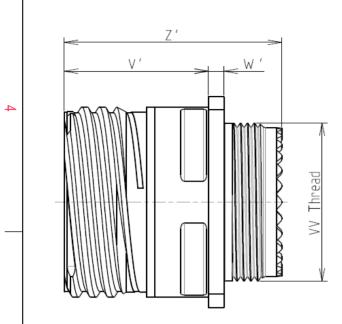

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ω

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite
-Shell Plating	: Nickel
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy 0.8µm minimum
-Durability	: 500 Mating cycles
-Delivered with Souria	u contacts and Accessories
-Temperature Range	<u>∶</u> -65°C to +200°C
-Salt Spray	: 2000 hours
-Mass	: 19.2 g ± 10%
	-Shell Plating -Insulator -Contacts -Seals & Grommet -Contact Plating -Durability -Delivered with Sourian -Temperature Range -Salt Spray

8D 0

G

13

Μ

08

В

F


Ν

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Z'	32 Max
/V THREAD	M18x1-6g

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

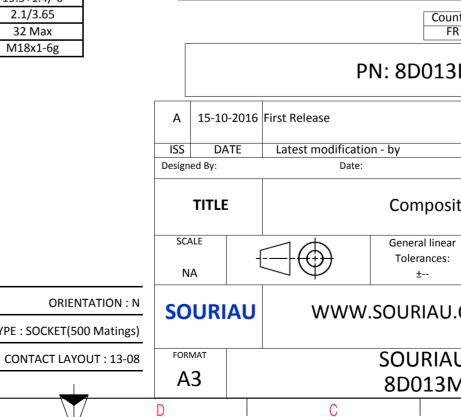

σ	J		Þ	>		
P						4
S EXAMPLE						3
which does	s not co ties or k	oy a third par				
Intry R	Jurisd	iction & Con Not Listed				2
3M08B	SN					
		CUSTOME	R DRAWING		/IOD N°	
ite Receptacle 8D series						
ar	NPRDS / PROJECT 859					
J.COM	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	J DRG N° SHEET					
MO8BN B	N-C		A		1/2	J

		۵	ات	m		0
		Contact Layout				Panel Cutout
4		$ \begin{array}{c} & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & $			Å	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Com posi II A E CC C C C C C C C C C C C C C C C N S S C N S S S S	Jon X-axis (mm) Y-axis (mm) 4 +.065 (1.65) +.157 (3.99) 8 +.170 (4.32) +.000 (0.00) > +.120 (3.05) 120 (3.05) > 170 (4.32) +.000 (0.00) E 120 (3.05) 120 (3.05) 170 (4.32) +.000 (0.00) S 065 (1.65) +.157 (3.99)			¥ 	
ى ع		mber of Size Service Contact Supersedes ntacts contacts rating location 8 8 20 I All MS20051-8				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
23						Country FR PN: 8D013N
					A 15-10-20 ISS DATE Designed By:	16 First Release
_					TITLE SCALE NA	General linear Tolerances:
					SOURIA	
		1	1		FORMAT A3	SOURIAU 8D013M0
	Н	G	F	E	D	C

