


- NOTES:
- 1) MATERIAL:  
HOUSING: NYLON 6/6, UL94V-2, COLOR: NATURAL  
TERMINAL: C2700W BRASS
  - 2) FINISH: 0.000003/(.0000001) MIN. TIN OVERALL OVER  
0.000001/(.00000004) MIN. NICKEL OVERALL
  - 3) PRODUCT SPECIFICATION: NONE
  - 4) PACKAGING SPECIFICATION: PK-5219-002
  - 5) MATES WITH: 3191-06R\*
  - △ DIFFERENCE OF DIMENSION IS INTENTIONAL TO PREVENT PART RISING FROM P.C.B.
  - 7) PARTS CONFORM TO CLASS 'B' REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

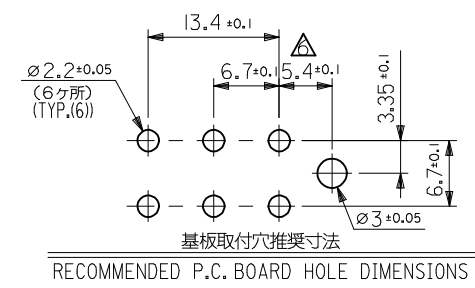

ENG. NO.	ORDER NO.	PIN STYLE	HSG. MATERIAL	PIN PLATING
5219-06A	15-31-1066	SOLID	94V-2 NYLON	TIN
5219-06B	15-31-3066	HOLLOW	94V-2 NYLON	TIN

ADD P/N 15-31-3066 EC NO: UCP2014-1950 DRWN: AELHAG 2013/12/16 CHKD: JBELL 2013/12/16 APPR: F SMITH 2013/12/19	QUALITY SYMBOLS ▽ F7=0 ▽ F7=0 ▽ F7=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
		4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.25 ± --- 1 PLACE ± 0.35 ± ---	DRAWN BY K. KOHAMA	DATE 2000/05/30	TITLE NEW INTER. CONN. 6POS. 6 POS. HEADER			
		ANGULAR ± 3°	CHECKED BY M. FUKUSHIMA	DATE 2000/05/30	MOLEX INCORPORATED			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO. SEE CHART		DOCUMENT NO. SD-5219-06A	SHEET NO. 1 OF 1		