




Terminals & Splices > Quick Disconnects

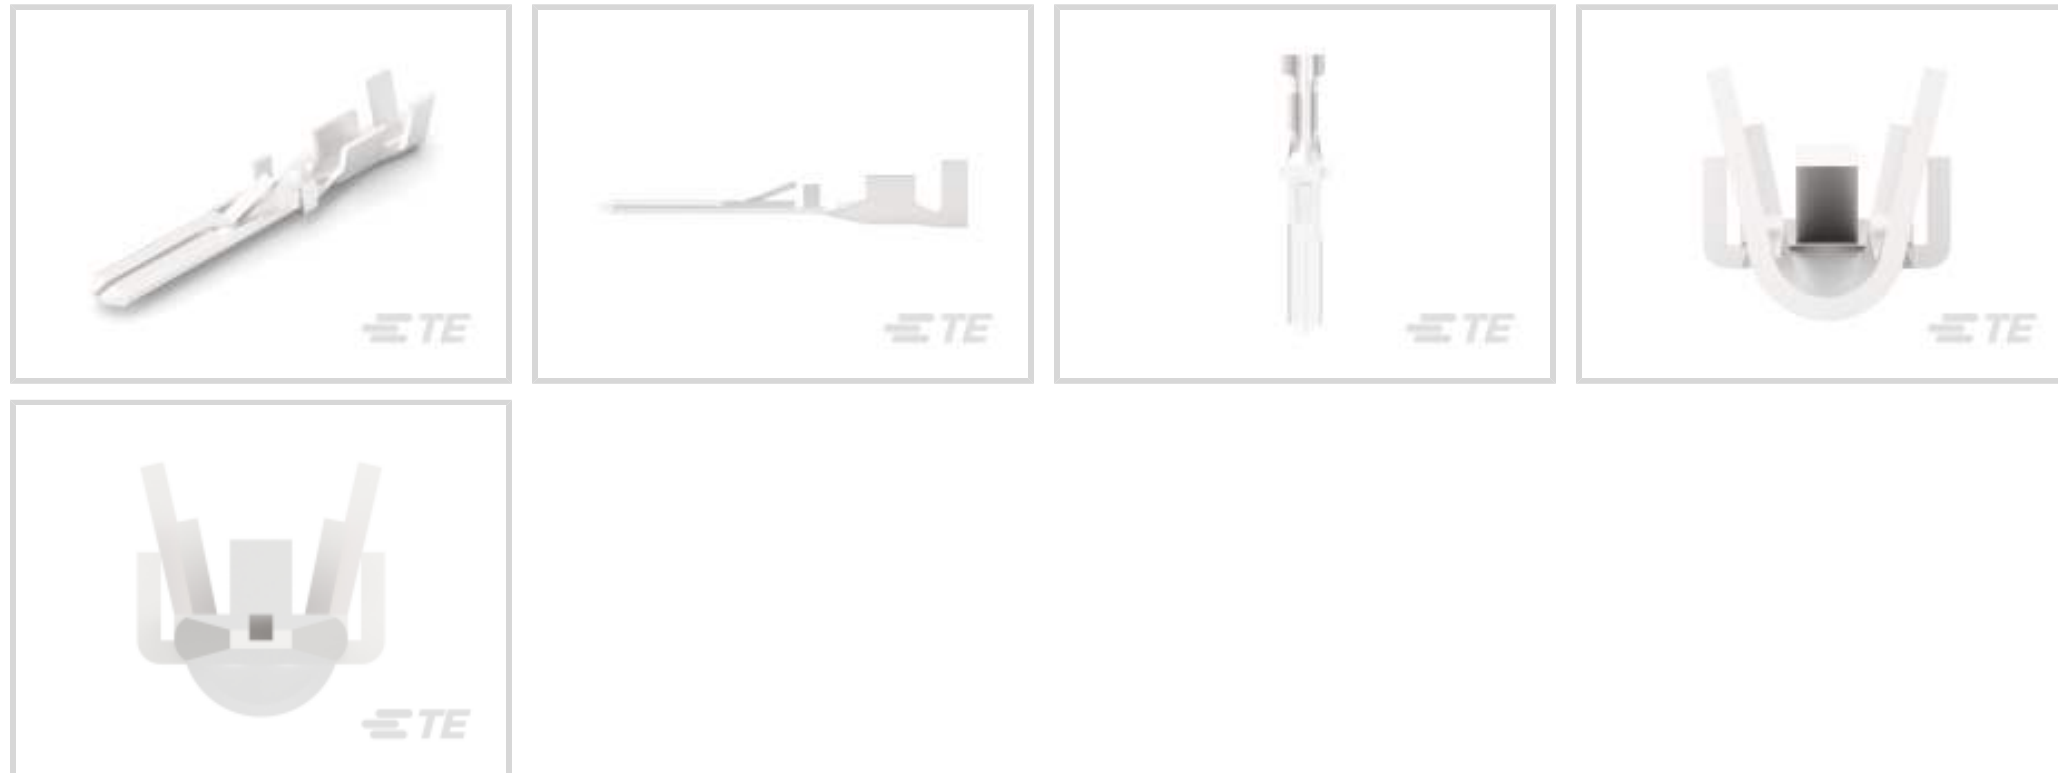

Quick Disconnect Terminal Type: **Tab**

Wire Size: **1021 – 2048 CMA**

Mating Tab Width: **2.8 mm [.11 in]**

Features

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Contact Features

Quick Disconnect Terminal Type	Tab
Mating Tab Width	2.8 mm [.11 in]
Mating Tab Thickness	.79 mm [.031 in]
Terminal Orientation	Straight
Contact Base Material	Copper Zinc Alloy
Terminal Plating Material	Silver
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Locking Lance Height	1.2 mm [.047 in]
----------------------	------------------



Mating Retention Type

Locking Lance

Dimensions

Product Length

22.5 mm [.886 in]

Compatible Insulation Diameter Range

1.4 – 2.3 mm [.055 – .09 in]

Wire Size

1021 – 2048 CMA

Usage Conditions

Insulation Option

Uninsulated

Operating Temperature Range

-40 – 140 °C [-40 – 284 °F]

Packaging Features

Packaging Quantity

1000

Packaging Method

Box

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU

Compliant

EU ELV Directive 2000/53/EC

Compliant

China RoHS 2 Directive MIIT Order No 32, 2016

No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JUNE 2023 (235)
Candidate List Declared Against: JUNE 2023 (235)
Does not contain REACH SVHC

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability






Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




Also in the Series | FASTIN-FASTON 110

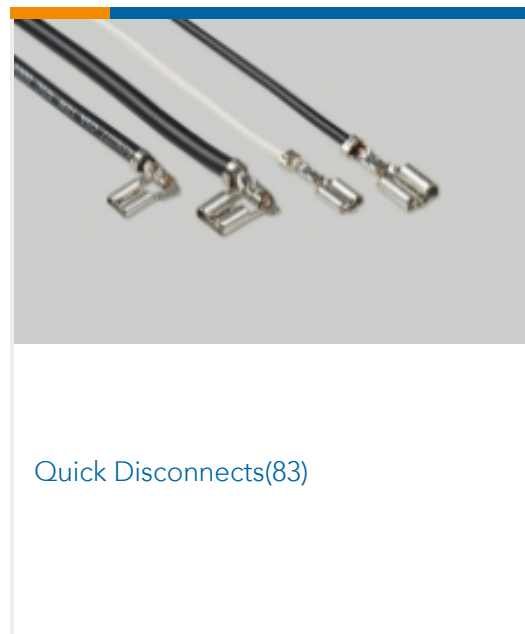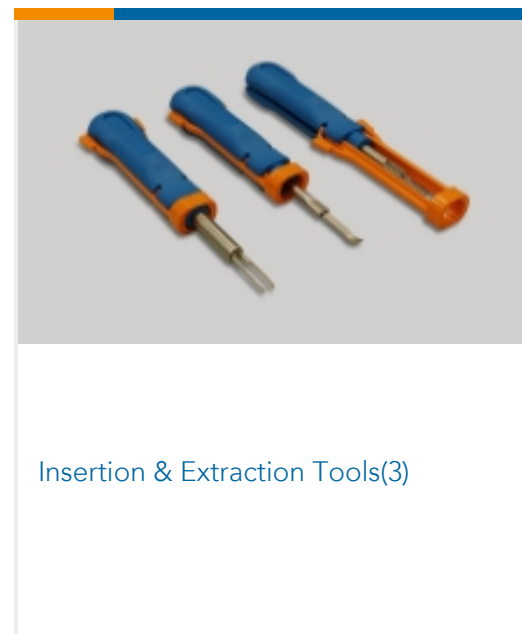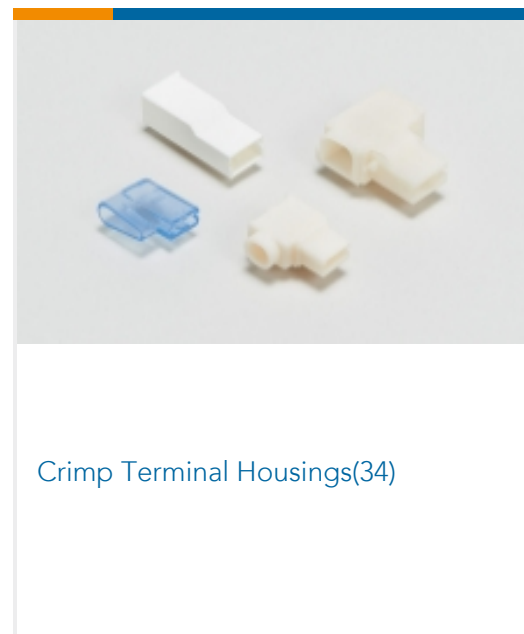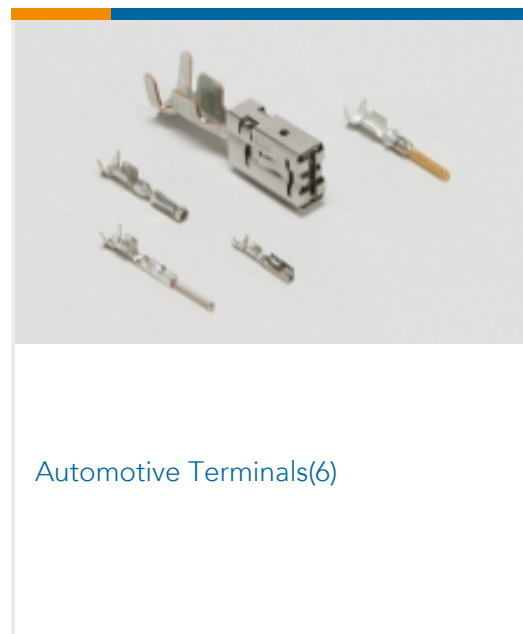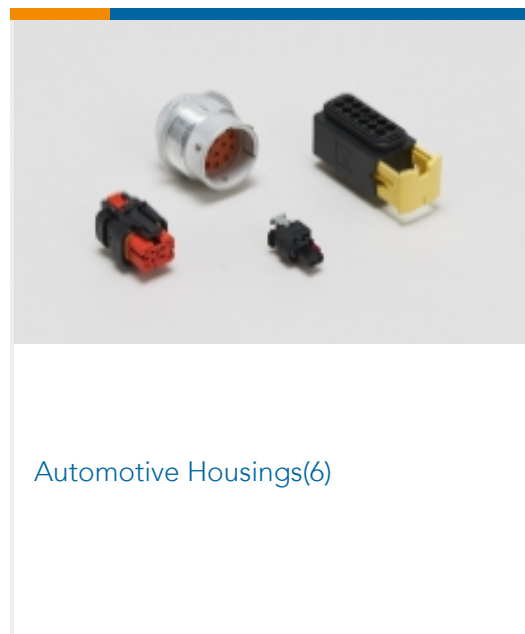

Customers Also Bought



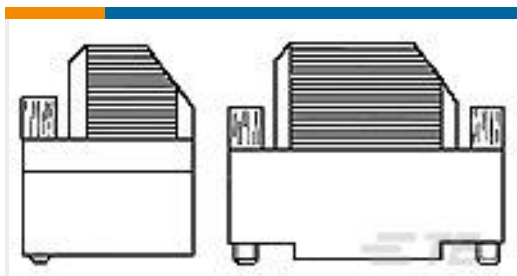

TE Part #1393738-4
V42254A6000G137=SUB D GEHAEUSE




TE Part #364201-E
SRCBUG A 2,54 2 2 CSI 165 E1 ADV
TRAY J




TE Part #364214-E
SRCBUG A 2,54 2 3 CSI 164 E1 ADV J
2 324



TE Part #464256-E
SRCA 1,27 10 F 1 IDC22 137 E1 094
1,27 T

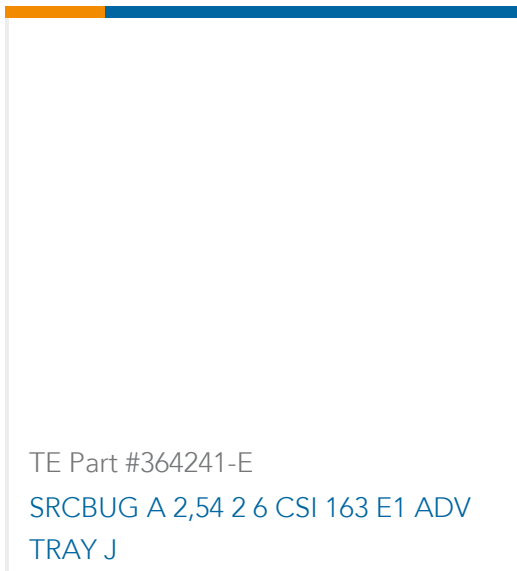

TE Part #364241-E
SRCBUG A 2,54 2 6 CSI 163 E1 ADV
TRAY J

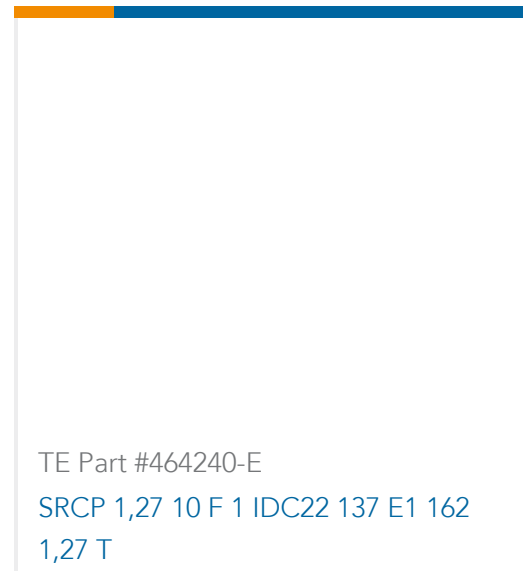

TE Part #464240-E
SRCP 1,27 10 F 1 IDC22 137 E1 162
1,27 T

Documents

Product Drawings

[FF 110 \(2.8 X 0.8 MM\) TAB SSP CUZN30](#)

English

[FF 110 \(2.8 X 0.8 MM\) TAB SSP CUZN30](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_928931-1_P.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_928931-1_P.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_928931-1_P.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.