



3.3 Volt CMOS 16-Bit Buffer/Line Driver

QS74FCT2X3244


FEATURES/BENEFITS

- Pin and function compatible to the QSFCT2X244
- Available in 40-pin QVSOP
- Undershoot clamp diodes on all inputs
- Ground bounce controlled outputs
- Low power QCMOS: 0.07 μ W typ static
- JEDEC low voltage spec compatible
- $I_{OL} = 24$ mA Com.
- TTL-compatible input and output levels
- Extended temperature -40°C to $+85^{\circ}\text{C}$
- 2.7V to 3.6V Supply Voltage


DESCRIPTION

The FCT2X3244 is a 16-bit buffer/line driver with three-state outputs that is ideal for driving high-capacitance loads as in memory address and data buses. All inputs have clamp diodes for undershoot noise suppression and all outputs have ground bounce suppression (see QSI Application Note AN-001). Control pins can be driven by 3.3V or 5V components. Ultra-low power QCMOS technology makes this product ideal for portable computing systems or communications devices.

FUNCTIONAL BLOCK DIAGRAM

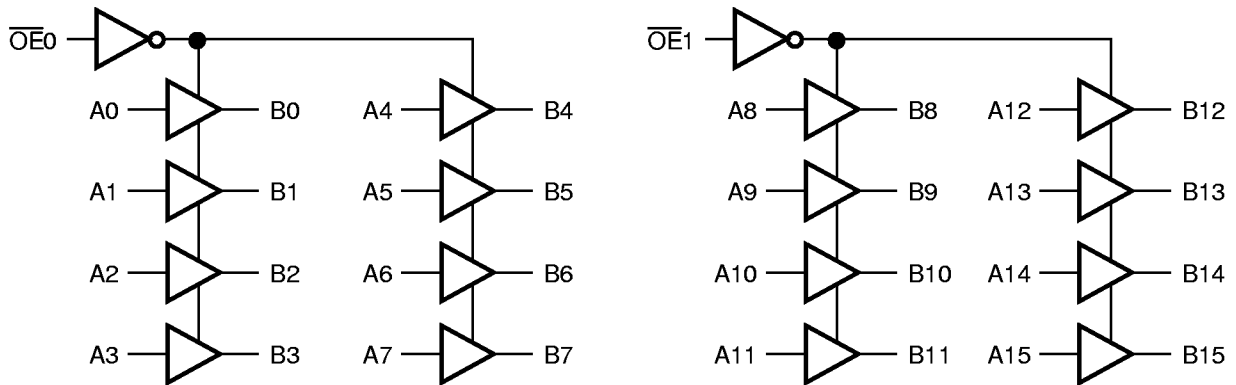

PIN CONFIGURATION
(All Pins Top View)

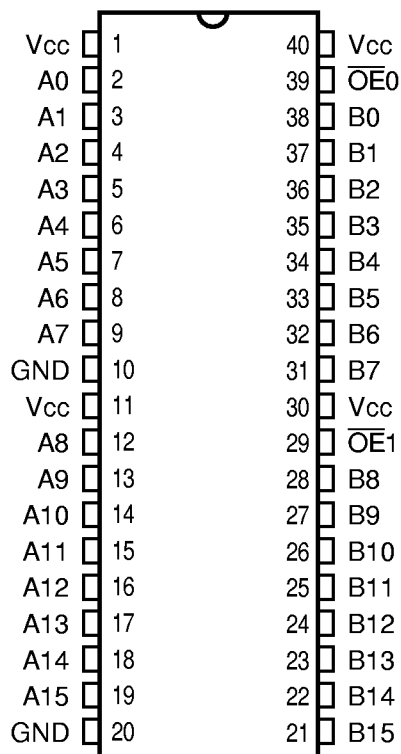

PIN DESCRIPTION

Name	I/O	Description
Ai	I/O	Data Bus A Inputs
Bi	I/O	Data Bus B Outputs
$\overline{OE}0$	I	Output Enables for A/B7-A/B0
$\overline{OE}1$	I	Output Enables for A/B15-A/B8

FUNCTION TABLE

$\overline{OE}n$	Input A	Output B
H	X	Hi-Z
L	L	L
L	H	H

ABSOLUTE MAXIMUM RATINGS

Supply Voltage to Ground	-0.5V to +4.6V
DC Input/Output Voltage	-0.5V to Vcc + 0.5V
DC Control Pin Voltage V _{IN}	-0.5V +7.0V
AC Input Voltage (for a pulse width ≤ 20 ns)	-3.0V
DC Input Diode Current with V _{IN} < 0	±20 mA
DC Output Diode Current with V _{OUT} < 0	±50 mA
DC Output Current Max. Sink Current/Pin	±60 mA
Maximum Power Dissipation	0.5 watts
T _{STG} Storage Temperature	-65° to +150°C

Note: Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to this device resulting in functional or reliability type failures.

CAPACITANCE

$T_A = 25^\circ\text{C}$, $f = 1\text{ MHz}$, $V_{IN} = 0\text{V}$, $V_{OUT} = 0\text{V}$

Pins	QVSOP Typ	Unit
1, 11, 29, 39	4	pF
2-9, 12-19, 21-28, 31-38	8	pF

Note: Capacitance is characterized but not tested.

RECOMMENDED OPERATING CONDITIONS

Symbol	Description	Min	Max	Unit
V_{CC}	Supply Voltage	2.7	3.6	V
V_{IN}	Input Voltage	0	V_{CC}	V
V_{OUT}	Output Voltage	0	V_{CC}	V
T_A	Ambient Operating Temperature	-40	+85	$^\circ\text{C}$
$\Delta t/\Delta V$	Input Transition Rise or Fall Rate ⁽¹⁾	0	8	ns/V

Notes:

1. As measured between 0.8V and 2V.

DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

Recommended operating conditions apply unless otherwise specified.

Symbol	Parameter	Test Conditions	Min	Typ ⁽¹⁾	Max	Unit
V_{IH}	Input HIGH Voltage	Input Pins	2.0	—	5.5	V
		I/O Pins	2.0	—	$V_{CC}+0.5$	V
V_{IL}	Input LOW Voltage	Input Pins	-0.5	—	0.8	V
ΔV_T	Input Hysteresis	$V_{TLH} - V_{THL}$ for All Inputs	—	0.2	—	V
$ I_{IH} $ $ I_{IL} $	Input Current Input HIGH or LOW	$V_{CC} = \text{Max.}$, $0 \leq V_{IN} < V_{CC}$	—	—	1	μA
$ I_{OZ} $	Off-State Output Current (Hi-Z)	$V_{CC} = \text{Max.}$, $0 \leq V_{IN} \leq V_{CC}$	—	—	5	μA
I_{OS}	Short Circuit Current	$V_{CC} = \text{Max.}$, $V_{OUT} = \text{GND}^{(2,3)}$	-60	—	-225	mA
V_{IC}	Input Clamp Voltage	$V_{CC} = \text{Min.}$, $I_{IN} = -18\text{ mA}^{(3)}$	—	-0.7	—	V
V_{OH}	Output HIGH Voltage	$V_I = V_{IH}$ or V_{IL} , $V_{CC} = \text{Min.}$, $I_{OH} = -100\ \mu\text{A}$	$V_{CC}-0.2$	—	—	V
		$V_I = V_{IH}$ or V_{IL} , $V_{CC} = 3\text{V}$, $I_{OH} = -8\text{ mA}$	2.4	—	—	
V_{OL}	Output LOW Voltage	$V_I = V_{IH}$ or V_{IL} , $V_{CC} = \text{Min.}$, $I_{OL} = 100\ \mu\text{A}$	—	—	0.2	V
		$V_I = V_{IH}$ or V_{IL} , $V_{CC} = 3\text{V}$, $I_{OL} = 16\text{ mA}$	—	—	0.4	V
		$V_I = V_{IH}$ or V_{IL} , $V_{CC} = 3\text{V}$, $I_{OL} = 24\text{ mA}$	—	—	0.5	V

Notes:


1. Typical values indicate $V_{CC} = 3.3\text{V}$ and $T_A = 25^\circ\text{C}$.
2. Not more than one output should be shorted and the duration is ≤ 1 second.
3. These parameters are guaranteed by design but not tested.

POWER SUPPLY CHARACTERISTICS

Symbol	Parameter	Test Conditions ⁽¹⁾	Min	Typ	Max	Unit
I _{CC}	Quiescent Power Supply Current	V _{CC} = Max., freq = 0 0V ≤ V _{IN} ≤ 0.2V or V _{CC} -0.2V ≤ V _{IN} ≤ V _{CC}	—	0.02	40	μA
ΔI _{CC}	Supply Current per Input @ TTL HIGH	V _{CC} = Max., freq = 0, V _{IN} = V _{CC} - 0.6V	—	1.0	20	μA
Q _{CCD}	Supply Current per Input per MHz	V _{CC} = Max., Outputs Open and Enabled One Bit Toggling @ 50% Duty Cycle Other Inputs at GND or V _{CC} ^(2,3)	—	40	85	μA/ MHz

Notes:

1. For conditions shown as Min. or Max., use the appropriate values specified under DC specifications.
2. Q_{CCD} is a measurement of device power consumption only and does not include power to drive load capacitance or tester capacitance. This parameter is guaranteed by design but not tested.
3. I_c can be computed using the above parameters as explained in the Technical Overview section.

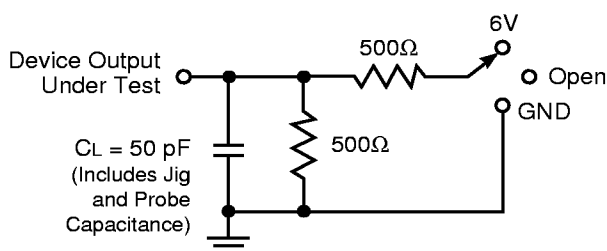

Test	Switch
t _{PHL} /t _{PLH}	Open
t _{PZL} /t _{PLZ}	6V
t _{PZH} /t _{PHZ}	GND

Load Circuit for Outputs

Notes

1. Input pulse characteristics: 0V to 2.7V, t_r = t_f = 2.5 ns (10% to 90%), transition measured at 1.5V, pulse generator Z_{OUT} = 50Ω.

SWITCHING CHARACTERISTICS OVER OPERATING RANGE

Commercial T_A = 0°C to 70°C, V_{CC} = 3.3V ± 0.3V


C_{LOAD} = 50 pF, R_{LOAD} = 500Ω unless otherwise noted.

Symbol	Description ⁽¹⁾	2X3244		2X3244A		Unit
		Min	Max	Min	Max	
t _{PLH} t _{PHL}	Propagation Delay A _i to B _i	1.5	6.5	1.5	4.8	ns
t _{PZH} t _{PZL}	Output Enable \overline{OE} to B _i	1.5	8	1.5	6.2	ns
t _{PLZ} t _{PHZ}	Disable Time ⁽²⁾	1.5	7	1.5	5.6	ns

Notes:

1. Minimums guaranteed but not tested.
2. This parameter is guaranteed by design but not tested.
3. See Test Circuit and Waveforms.

150-MIL QVSOP™ - Package Code Q1/Q2
150-Mil Wide Plastic Small Outline Gull-Wing

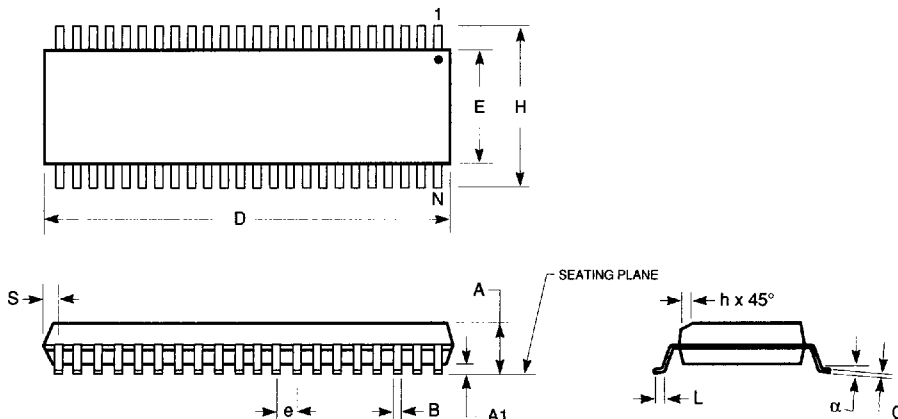

JEDEC#	MO-154BB			MO-154AB		
DWG#	PSS-40A (Q2)			PSS-48A (Q1)		
Symbol	Min	Nom	Max	Min	Nom	Max
A	0.059	0.065	0.069	0.059	0.065	0.069
A1	0.004	0.006	0.008	0.004	0.006	0.008
B	0.0067	0.008	0.009	0.0051	0.0063	0.008
C	0.0075	0.008	0.0098	0.0075	0.008	0.0098
D	0.386	0.390	0.394	0.386	0.390	0.394
E	0.150	0.154	0.157	0.150	0.154	0.157
e	0.0197 BSC, 0.5mm			0.0157 BSC, 0.4mm		
H	0.228	0.236	0.244	0.228	0.236	0.244
h	0.010	0.013	0.016	0.010	0.013	0.016
L	0.020	0.024	0.030	0.020	0.024	0.030
N	40			48		
α	0°	5°	8°	0°	5°	8°
S	0.006	0.008	0.010	0.012	0.014	0.016

Notes:

1. Refer to applicable symbol list.
2. All dimensions are in inches.
3. N is the number of lead positions.
4. Dimensions D and E are to be measured at maximum material condition but do not include mold flash. Allowable mold flash is 0.006in. per side.
5. Lead coplanarity is 0.003in. maximum.

7466803 0003753 331