



### Electrical Specifications

**Notch Center Frequency:** 915 MHz  
**Notch Band:** 902-928 MHz  
**Notch Band Attenuation:** >20 dB  
**Low Side of Passband:** 500-850 MHz  
**High Side of Passband:** 970-1200 MHz  
**Insertion Loss in Passband:** <1 dB  
**Return Loss in Passband:** >15 dB  
**Rejection:** >20dB @ 902-928 MHz  
**Power Handling:** 20 Watts Max


### Mechanical

**Connector Type:** SMA (M/F)  
**Dimensions:** 2.50 x 1.125 x 0.75 Inches

### Environmental

**Operating Temperature:** 0 to +60° C  
**Storage Temperature:** -40 to +85° C  
**Shock:** 10 G. 11 ms  
**Vibration:** 10 G. 5 to 200 Hz

### Outline Drawing:

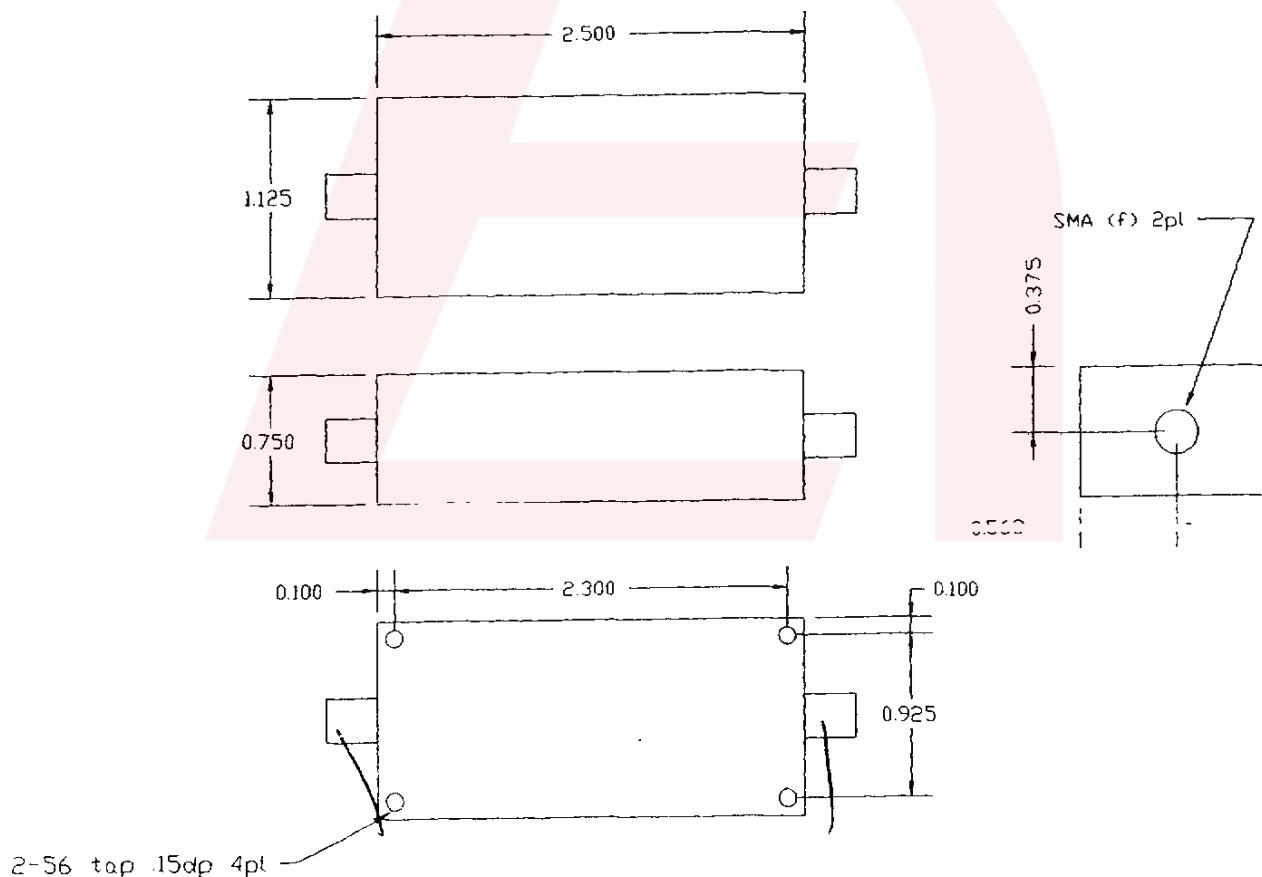



### Response Plot:

