

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION




20

© COPYRIGHT 2018 BY TE CONNECTIVITY


ALL RIGHTS RESERVED.

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
A		RELEASED	20NOV18	W.Z	W.W
A1		REVISED(ECR-19-008773)	21JUN19	W.Z	W.W

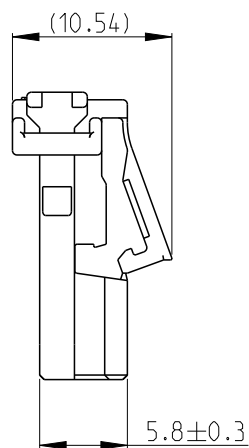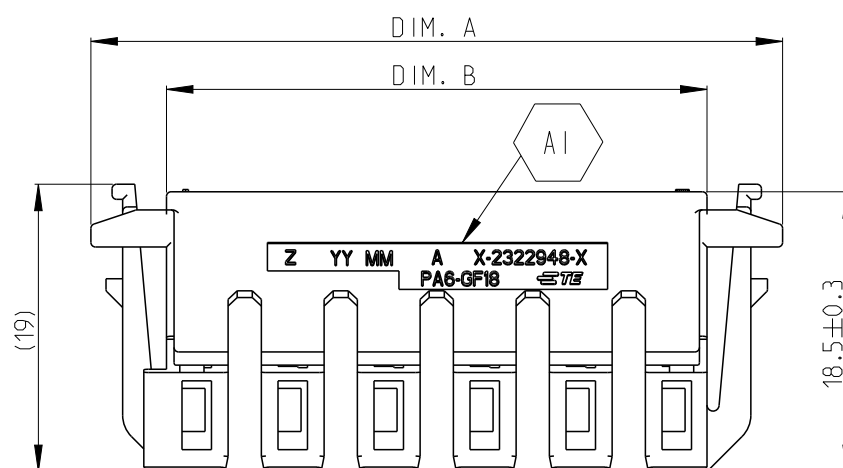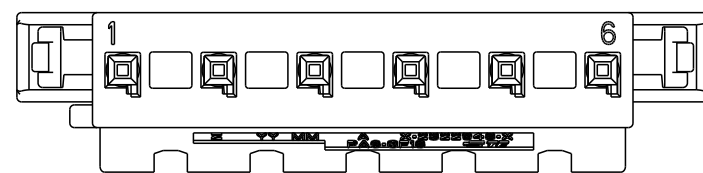

6 POS. CODING AS SHOWN

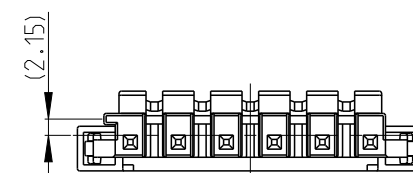


2322948-1 CODING A

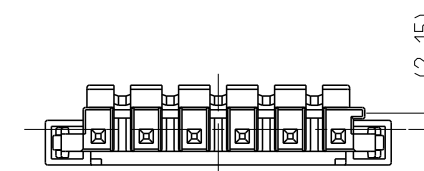


2322948-2 CODING B

2 POS. CODING AS SHOWN





2-2322948-1 CODING A



2-2322948-2 CODING B

SECOND LOCK CLOSED STATUS



SCALE 1:1

- 1 MATERIAL: PA6-GF18, ORANGE
- 2. SUITABLE TERMINAL P/N:
5-963715-1, WIRE SIZE: 0.5~0.75mm²
5-928999-1, WIRE SIZE: 0.25~0.35mm²
- 3. MATING HEADER P/N:
6P: 2322946-1/2322946-2, 2322949-1/2322949-2
2P: 2-2322946-1/2-2322946-2, 2-2322949-1/2-2322949-2
- 4. OPERATION TEMPERATURE: -40°C~+125°C
- 5. RATED OPERATION VOLTAGE: 1000V DC
- 6. 2322948-1 AS SHOWN

10.35±0.3	(20.35)	ORANGE	PA6-GF18	B	2	2-2322948-2
				A		2-2322948-1
35.75±0.3	(45.75)	COLOR	MATERIAL	B	6	2322948-2
				A		2322948-1
DIM. B	DIM. A			CODING	POS NO.	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN X.LI 20JUL2017	<p>TE Connectivity</p> <p>NAME HV DETECTING CONNECTOR</p>													
DIMENSIONS: mm		CHK W.WU 07AUG2017														
TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2		APVD L.YIN 10AUG2017														
<table border="1"> <tr><td>0 PLC</td><td>±</td></tr> <tr><td>1 PLC</td><td>±</td></tr> <tr><td>2 PLC</td><td>±</td></tr> <tr><td>3 PLC</td><td>±</td></tr> <tr><td>4 PLC</td><td>±</td></tr> <tr><td>ANGLES</td><td>±</td></tr> <tr><td>FINISH</td><td>-</td></tr> </table>		0 PLC					±	1 PLC	±	2 PLC	±	3 PLC	±	4 PLC	±	ANGLES
0 PLC	±															
1 PLC	±															
2 PLC	±															
3 PLC	±															
4 PLC	±															
ANGLES	±															
FINISH	-															
MATERIAL	1	APPLICATION SPEC -	SIZE A3	CAGE CODE 00779	DRAWING NO C-2322948	RESTRICTED TO -										
CUSTOMER DRAWING			SCALE 2:1	SHEET 1 OF 1	REV A1											