




5 4 3 2 1

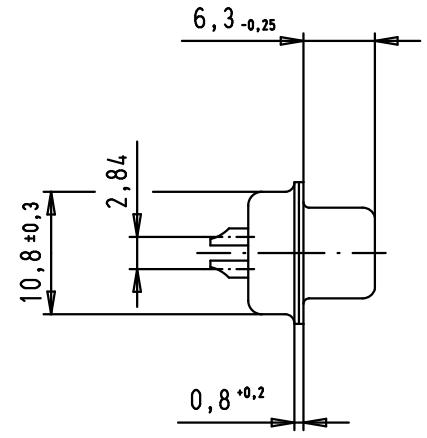

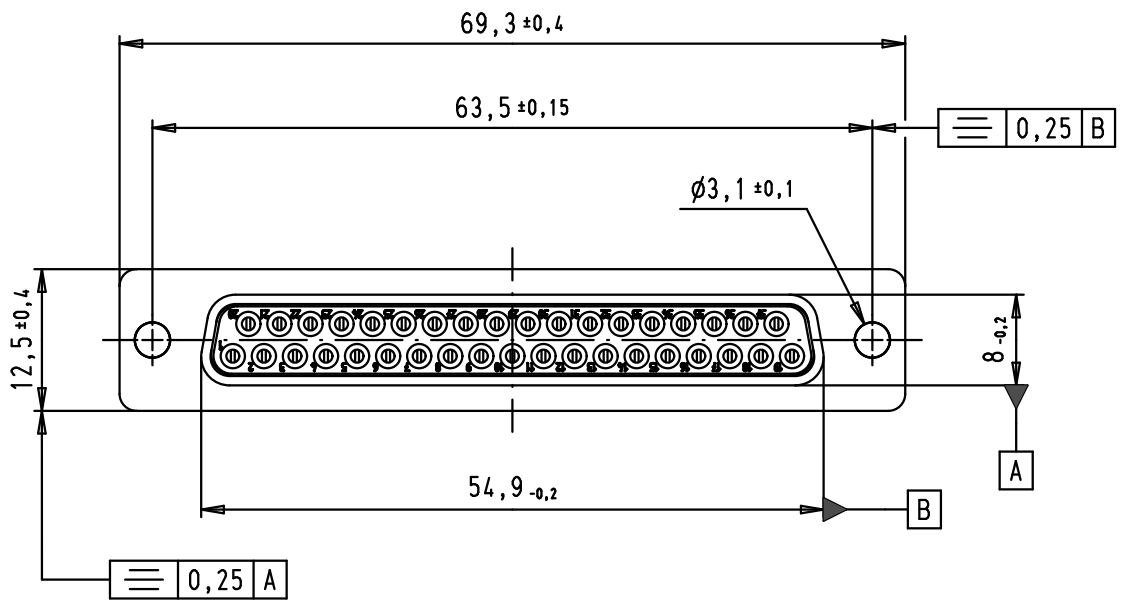

SPECIFICATIONS

| | |
|-----------------------|-----------|
| Performance level | PL2 |
| Filter type | C |
| Capacitance | 47 pF±20% |
| Working voltage | 100 V |
| Current rating | 7,5 A |
| Insulation resistance | >1 GΩ |
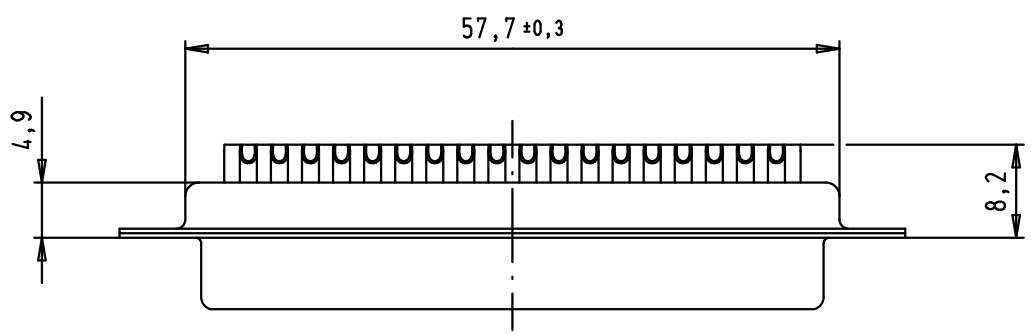
| FREQUENCY (MHz) | ATTENUATION (dB) |
|-----------------|------------------|
| 5 | - |
| 10 | - |
| 50 | - |
| 100 | - |
| 500 | 30 |
| 1000 | 35 |



Solder buckets for AWG 20

| | | | | | | | | | | | | | |
|--|--|--|-------|-------|----------|----------|--------|-------------------------------|----------|----|---|--|----------------------------|
| | | | | Mod. | 36283 | 12/01/12 | SD | Detail. | 08/07/02 | CV |  All Dim. in mm Orig. Size DIN A 4 | D-Sub, female, straight, 37 poles, turned solder buckets | Maßstab/ Scale 1,5:1 |
| | | | Insp. | 35300 | 01/12/08 | PK | Stand. | 12/01/12 | JB | | | | |
| | | | | 33800 | 18/08/06 | PK | | | | | | | |
| | | | | 31058 | 08/07/02 | CV | | | | | | | |
| | | | | | | | | HARTING EURL F-95972 Paris | | |  | TB 09 64 411 7210 | Blatt/ Page 1 / 1 |
| | | | | | | | | | | | | | |

D
C
B
A