




RoHS Compliant

- TEST CONDITIONS:  
 1. 100% OPEN & SHORT & MISS-WIRING & INTERMITTENCE TEST.  
 2. CONDUCTIVE RESISTANCE: 30 MAX.  
 3. INSULATION RESISTANCE: 10 MQ  
 4. HI-POT TEST: 300VDC FOR 10ms.  
 5. THIS PRODUCT MEETS PCIe 3.0

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	Internal Release	9/17/2021	Lemon

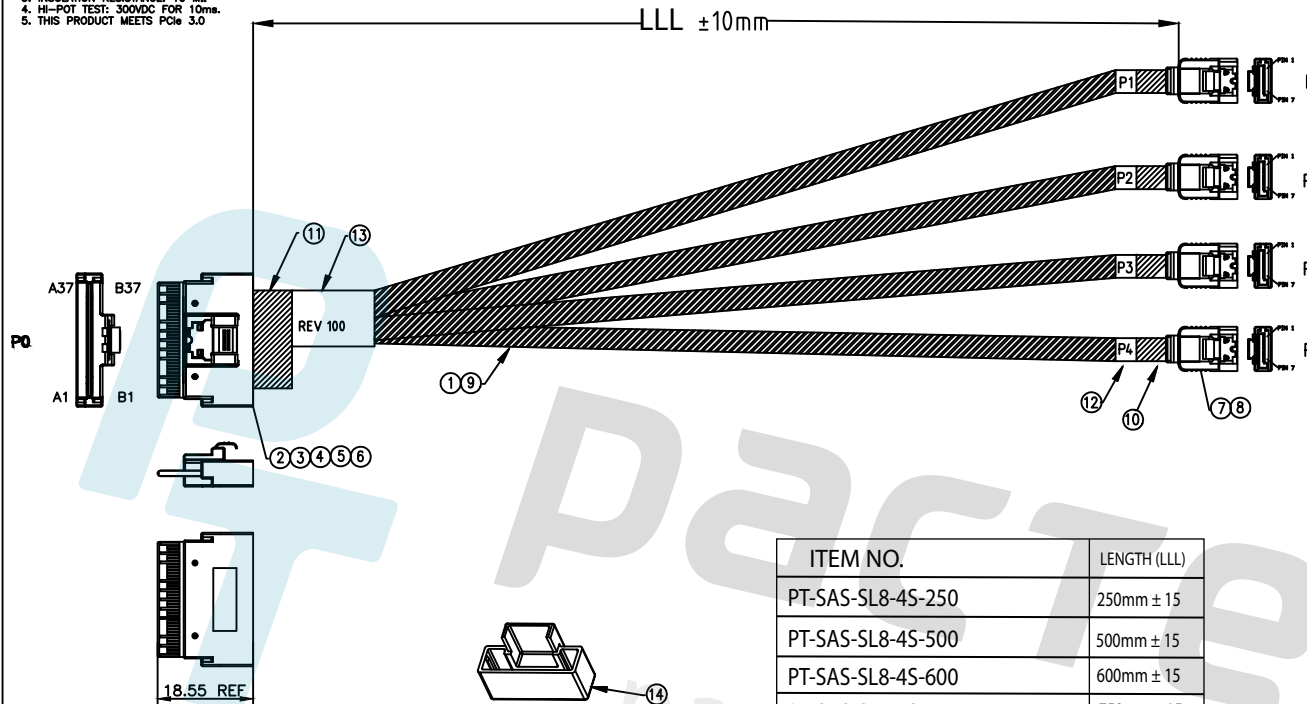

ITEM NO.	LENGTH (LLL)
PT-SAS-SL8-4S-250	250mm ± 15
PT-SAS-SL8-4S-500	500mm ± 15
PT-SAS-SL8-4S-600	600mm ± 15
PT-SAS-SL8-4S-750	750mm ± 15
PT-SAS-SL8-4S-1000	1000mm ± 15

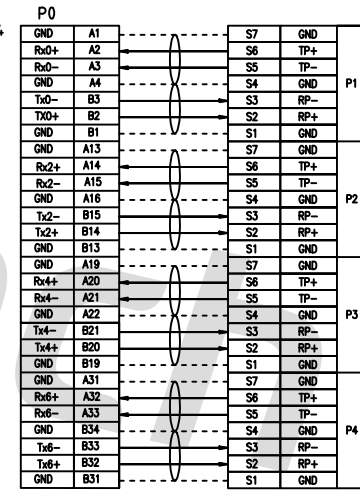

A1, A4, A7, A13, A16, A19, A22, A25, A31, A34, A37, B1, B4, B7, B13, B16, B19, B22, B25, B31, B34, B37 Ground on PCB

ITEM	NAME	QTY	DESCRIPTION	NOTE
14	DUST CAP	1	DUST CAP, SFF-8654 8i, PE, NATURAL	
13	LABEL	1	WHITE LABEL, 60X30MM(REF)	
12	LABEL	8	WHITE LABEL, 40X10MM(REF)	
11	ACETATE TAPE	A/R	ACETATE TAPE, WIDTH: 25MM, BLACK	
10	ACETATE TAPE	A/R	ACETATE TAPE, WIDTH: 10MM, BLACK	
9	BRAND	A/R	BRAIDED SLEEVE, PET, BLACK	
8	OVERMOLD	A/R	OVERMOLD, PVC, 4SP, BLACK	
7	CONNECTOR	8	SATA CONN, 7P, F, STR, AU15u	
6	RIVET	2	RIVET, SFF-8654	
5	LATCH	1	LATCH, SFF-8654	
4	HOUSING	1	HOUSING, SFF-8654, 8i STR, BLACK	
3	INNER MOLD	A/R	INNER MOLDING FOR SFF-8654 8i STR, BLACK	
2	8654 PCB	1	PCB, SLIMSAS 8i STR, AU30u	
1	SAS CABLE	A/R	SAS CABLE, 85 OHM, 30 AWG, BLUE	

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH SHALL NOT BE REPRODUCED, TRANSFERRED, TO OTHER DOCUMENTS, DISCLOSED OR USED FOR ANY OTHER PURPOSE WITHOUT PRIOR WRITTEN PERMISSION OF PACTECH



CUSTOMER PART NUMBER	
DRAWN BY Man Hin Wong	CHECKED BY Damon Choi
APPROVED BY Aaron Chui	UNIT Millimeter

DESCRIPTION SlimSAS 8i to 4 SATA connectors PCIe Gen 3	
SIZE A	PART NUMBER PT-SAS-SL8-4S-LLL
SCALE 1:1	REV 100
SHEET Page 1/1	