



WSW P/N	Length	⑥ PE BAG	⑦ PE BAG
AK-CHMM-2	2000±50	130*230*0.05mm	280*330*0.05mm
AK-CHMM-015	1500±30	130*230*0.05mm	280*330*0.05mm
AK-CHMM-025	2500±50	130*230*0.05mm	280*330*0.05mm
AK-CHMM-050	5000±50	180*280*0.05mm	330*380*0.05mm
AK-CHMM-076	7600±50	180*280*0.05mm	330*380*0.05mm

Electrical test:
 1. 100% short, open, miss wire test
 2. Conduct resistance: 5 Ohm(max)
 3. Insulation resistance: 5Mohm(min)
 4. dielectric test: DC 300V

PIN ASSIGNMENT:



⑧	TIE	2	BLACK
①	PE BAG	1/10	CLEAR PRINT BLACK"MADE IN CHINA+"10PCS"
②	PE BAG	1	CLEAR PRINT BLACK"MADE IN CHINA+"1PC"
③	S/R	3.0g	BLACK PVC 40P (Mould NO.:SR-048)
④	IN JACKET	1.6g	CLEAR LD-PE (Mould NO.:NW-006)
⑤	OUT JACKET	6.6g	CLEAR LD-PE (Mould NO.:NW-009)
⑥	IN JACKET	1.6g	CLEAR LD-PE (Mould NO.:NM-006)
⑦	OUT JACKET	6.6g	PVC-40P WHITE(W-100)(Mould NO. WM-006)
⑧	CABLE	1	NOUL 28#(10/0.10+28/0.10)*2F JACKET BLACK OD2.8*5.6mm
⑨	CONN	4	RCA PLUG MALE 梅花型 TYPE NI-PLATED INSULATOR COLOR:BROWN

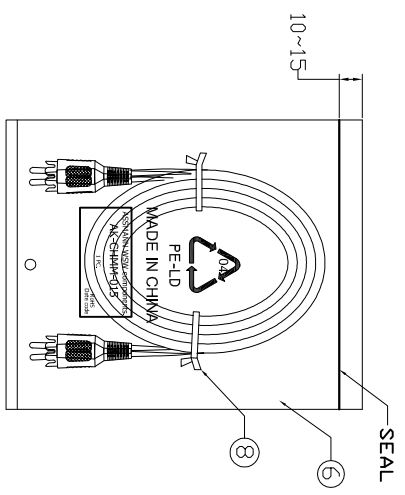

RoHS compliant
 Unit: mm

Scale	Free
TOLERANCE	
DIM	
TOL	
Angle	
TOL	

①	Add new length version	15.03.2018	Amy
② <td>Drawn <td>20.02.2017 <td>Amy </td></td></td>	Drawn <td>20.02.2017 <td>Amy </td></td>	20.02.2017 <td>Amy </td>	Amy

Id.	Modification	Date	Name
①			

ASSMANN
 wsw components

Customer-No.	Date	Name
ASSMANN WSW-No.	20.02.2017	Amy
AK-CHMM-XX	15.03.2018	Amy

Drawing-No.	Replace
ASS 7867 CA	

1	2	3	4	5	6	7
A						
B						
C						
D						
E						
F						
G						
H						