

Ratings

Temperature: -25~80°C
 Flammability: FT2

Twisted Pair (1PR)

Voltage: 30 V
 Gauge: 28 AWG 0.09 mm²
 Color: green/white
 Conductor: tinned copper strands, $\phi 0.127 \times 7$
 Conductor resistance at 20 °C: 239 Ω /km max
 Insulation
 Material: foamed PE
 Diameter: $\phi 0.85 \pm 0.1$
 Thickness: 0.23 mm nominal
 Resistance at 20 °C: 10 M Ω /km min
 Twisted pair characteristic impedance: 100 Ω

Power Wire (2C)

Voltage: 300 V
 Gauge: 22 AWG 0.35 mm²
 Color: red (power), black (ground)
 Conductor: tinned copper strands, $\phi 0.127 \times 26$
 Conductor resistance at 20 °C: 59.4 Ω /km max
 Insulation
 Material: SR-PVC, 90A
 Diameter: $\phi 1.35 \pm 0.1$
 Thickness: 0.3 mm nominal
 Resistance at 20 °C: 10 M Ω /km min

Power marking: E339579 UL AWM STYLE 1061 80°C 300V --- cUL AWM I A 80°C 300V FT2 TENSILITY

Shield

Type: aluminium mylar + tinned copper braid
 Stranding: $\phi 0.08$
 Coverage: 65% min braid, 100% foil



Drain

Stranding: $\phi 0.08 \times 19$
 Material: tinned copper strands

Outer jacket

Material: PVC, 79A
 Color: black
 Style: round
 Diameter: $\phi 5.2 \pm 0.3$
 Nominal thickness: 0.9 mm

Jacket marking: E339579 UL AWM STYLE 2725 28AWG/1P+22AWG/2C 80°C 30V --- cUL AWM I/II A 80°C 30V FT2 TENSILITY

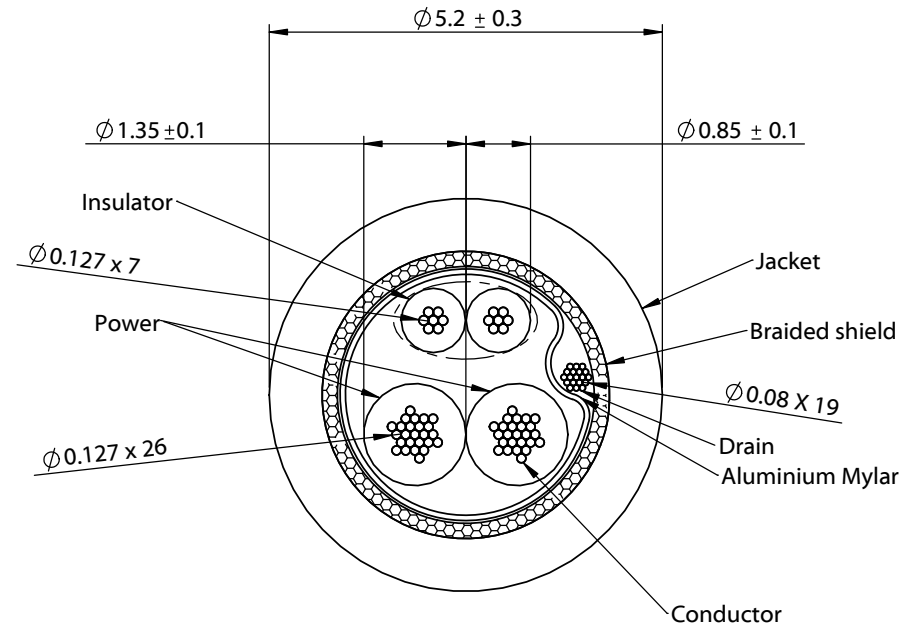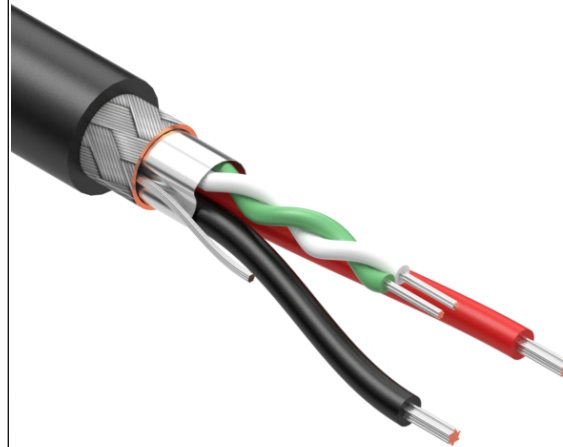

Revision:	Date:	Description:
A	2/28/22	Initial release

Prepared: **JD**
Digitally signed by JD
 Date: 2023.04.25
 10:51:15 -07'00'

Verified: **PB**
Digitally signed by PB
 Date: 2023.04.25
 12:23:44 -07'00'

Dimensions are in millimeters.
 Tolerances:
 X: ± 0.5 mm
 X.X: ± 0.3 mm
 X.XX: ± 0.05 mm

Notes:
 RoHS compliant

Function test: no open, no short circuit, no intermittent

Description:
 Wire, 1PR TS 28 AWG, 2C TS 22 AWG, UL2725, 30V, 80C, 5.2 mm, shielded, FT2, PVC

TENSILITY

tel 1.541.323.3228 800 877.670.7118
 fax 1.541.323.4202 web tensility.com

Size: A Part number: 30-02482

Scale: 10:1 Sheet 1 of 1