

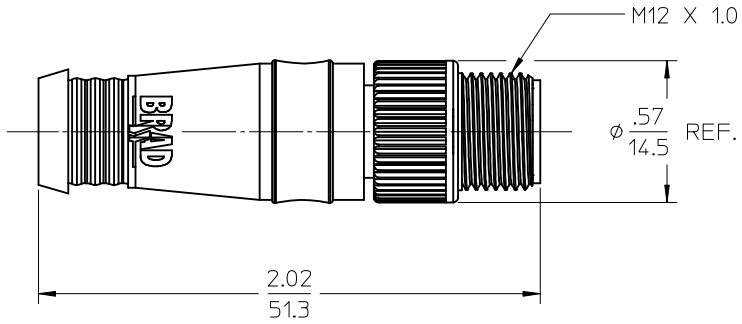





| | | | |
|--------------|-----------------|--|---|
| 10 | 9 | 8 | 7 |
| MATERIAL NO. | ENGINEERING NO. | DESCRIPTION | |
| 1300390382 | DND100 | MALE STANDARD TERMINATOR WITH RESISTOR | |
| 1300390125 | DND101 | MALE TERMINATOR WITH JUMPERS | |

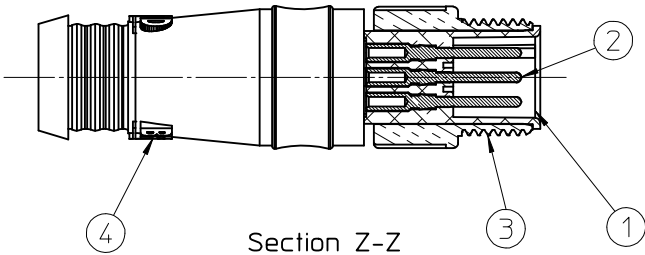

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. MATES WITH: FEMALE MICRO-CHANGE 5 POLE RECEPTACLE
 4. ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING: 30V
CURRENT RATING: 4.0 AMPS
 5. ASSEMBLY IS RoHS COMPLIANT

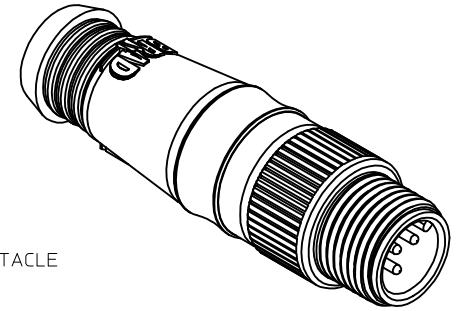

WIRING DIAGRAM
(1300390382)



WIRING DIAGRAM
(1300390125)

| | | | | |
|------|------|----------------------------------|----------------------|--------|
| 6 | 2 | JUMPER WIRE, 22 AWG | PVC INSULATION | |
| 5 | 1 | RESISTOR, 121 OHM, 1/4 WATT, ±1% | CARBON OR METAL FILM | |
| 4 | 1 | OVERMOLD | GRAY | PVC |
| 3 | 1 | COUPLING NUT, MALE THREAD | ZINC | BLACK |
| 2 | 5 | CONTACT PIN | Cu ALLOY | GOLD |
| 1 | 1 | INSERT, 5 POLE | NYLON | BLACK |
| ITEM | QTY. | DESCRIPTION | MATERIAL | FINISH |

RELEASED
EC NO: WNA2010-0141
DR: W. R. STONE 2009/08/28
CHK: B. WOODMAN 2009/08/28
APPR: J. MURPHY 2009/08/31

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

| | | |
|---------------|--------|---------|
| | mm | INCH |
| 4 PLACES | ± .005 | ± .0005 |
| 3 PLACES | ± .008 | ± .0008 |
| 2 PLACES | ± .015 | ± .0015 |
| 1 PLACE | ± 0.3 | ± .012 |
| ANGULAR ±1/2° | | |

DRAFT WHERE APPLICABLE
MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE
IN/MM

| | |
|-------------|------------|
| DRAWN BY | DATE |
| R. STONE | 2009/08/27 |
| CHECKED BY | DATE |
| B. WOODMAN | 2009/08/28 |
| APPROVED BY | DATE |
| J. MURPHY | 2009/08/28 |

MATERIAL NO.

SCALE 2:1
DESIGN UNITS INCH
THIRD ANGLE PROJECTION

TITLE
MICRO-CHANGE TERMINATOR
MALE, 5 POLE
DEVICE NET

MOLEX INCORPORATED

DOCUMENT NO. SD-130039-011
SHEET NO. 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION