

–			_	
	<u>دی</u>	 	0	0





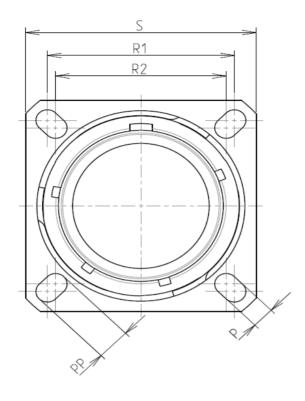

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

ł	-Shell Material	: Stainless Steel		
	-Shell Plating	: Passivated		
	-Insulator	: Thermoplastic		
	-Contacts	: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
	-Durability	: 500 Mating cycles		
	-Delivered with Souriau contacts and Accessories			
	-Temperature Range	: -65°C to +200°C		

: 500 hours

: 28.9 g ± 10%

8D 0

G

11

К

22

Ρ


F


В

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g

CONTACT TYPE : PIN(500 Matings)

Е



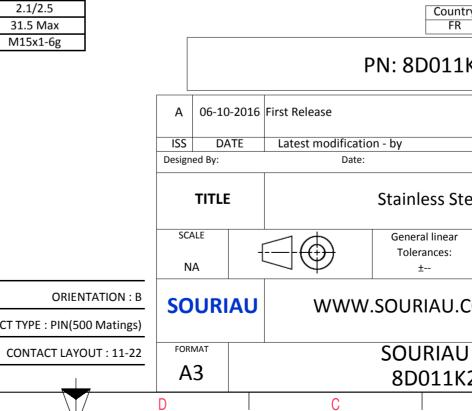

	Φ		A		
					4
AS EXA	AMPLE				3
s whic er of t ndatio untry FR	non-conformit th does not co he Parties or to n, technical no Jurisd	mply with by a third part			2
	Ι			MOD N°	
Stee					
			59		1
	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	DRG N°			SHEET	
.K2	2PB-C			1/2	
	В		А		

		Contact Layout						Panel Cuto
		22*				SQUI	ARE FLANGE RECEPTACLE (TYPE REAR MOUNTING	
4	(0 0 0						-
	Ctc A B	4#22D 11-22 X Y 1.905 1.905 1.905						ØT_
	C D	-1.905 -1.905						Dim ØA
ယ		-1.905 1.905]				Ø	AA R1
								ØT
							SOURIAU shall not b due to a use of th the Specifications issue (professional	e Products w ed by either
N								Coun
							PN:	8D011
					A	06-10-2016 I DATE ned By:	First Release Latest modification - b Date:	P y
					Desig	TITLE		ainless St
<u> </u>						CALE -		General linear Tolerances: ±
					so	DURIAU	WWW.SO	URIAU.
		1			A	RMAT \3	8	OURIAU 8D011k
	Н	G	F	E	D		С	

Т

ш

0

т

G

