


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER	MARKER PER CARDS	STYLE	LEGEND	STD. PKG. QTY.
PCV-110CY	18	C	110 Volts	5
PCV-115CY	18	C	115 Volts	5
PCV-120/208CY	18	C	120/208 Volts	5
PCV-120CY	18	C	120 VOLTS	5
PCV-12470CY	18	C	12470 VOLTS	5
PCV-13800CY	18	C	13200 VOLTS	5
PCV-1PHCY	18	C	Single Phase	5
PCV-208CY	18	C	208 VOLTS	5
PCV-220CY	18	C	220 VOLTS	5
PCV-2300CY	18	C	2300 VOLTS	5
PCV-230CY	18	C	230 VOLTS	5
PCV-2400CY	18	C	2400 VOLTS	5
PCV-240CY	18	C	240 VOLTS	5
PCV-277/480CY	18	C	277/480 VOLTS	5
PCV-277CY	18	C	277 VOLTS	5
PCV-380CY	18	C	380 VOLTS	5
PCV-3PHCY	18	C	Three Phase	5
PCV-415CY	18	C	415 VOLTS	5
PCV-4160CY	18	C	4160 VOLTS	5
PCV-440CY	18	C	440 VOLTS	5
PCV-460CY	18	C	460 VOLTS	5
PCV-480CY	18	C	480 VOLTS	5
PCV-600CY	18	C	600 VOLTS	5
PCV-BLANKCY	18	C	Blank- No Legend	5
PCV-ESCY	18	C	Emergency Service	5
PCV-FACY	18	C	Fire Alarm	5
PCV-FOCY	18	C	Fiber Optic	5
PCV-FOCCY	18	C	Fiber Optic Cable	5
PCV-MA1NCY	18	C	Main	5
PCV-TELECY	18	C	Telephone	5

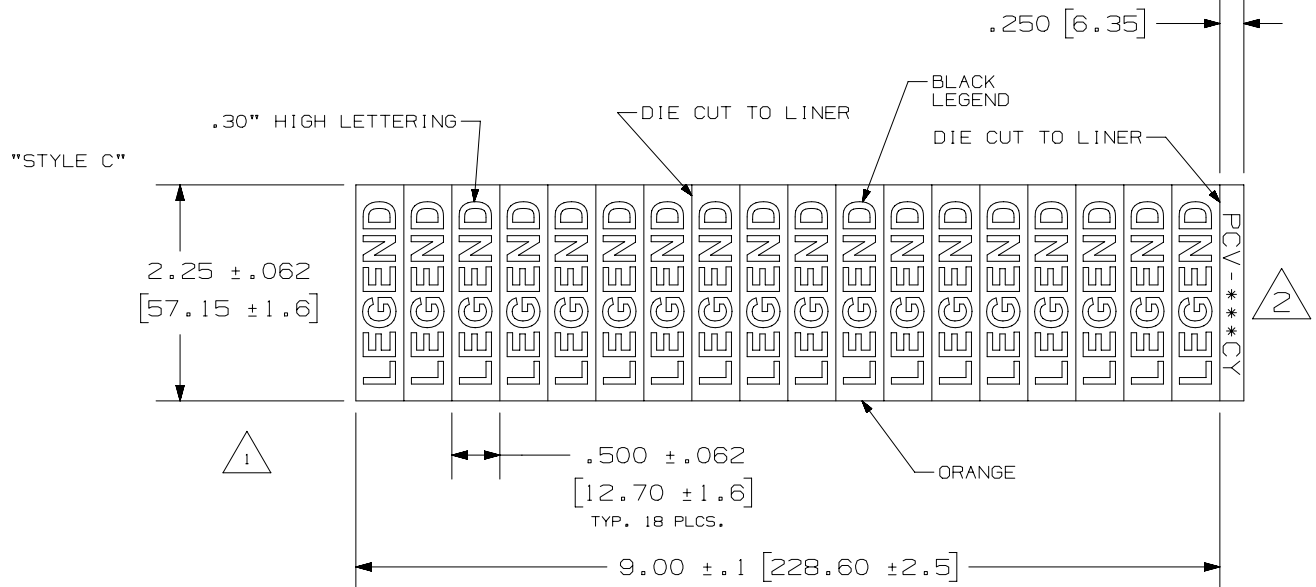

NOTE:

- CARDS TO BE PACKAGED 5 CARDS PER BAG.
- MILLIMETER ARE IN [].
- SEE CUSTOMER DRAWING C10360 FOR 1.125" AND 2.25" PCV MARKERS.

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE	ITEM REVISION NAME	DATASET FILE NAME	MATERIAL:	DRAWING NUMBER:	
							PCV - ***CY VOLTAGE AND FIBER OPTIC MARKERS CUSTOMER DRAWING	100318JS/04	100318JS_DC_C10360,C10829/04C	SEE TABLE	C10829	
2	9/10/15	RVU	SEWH	JHAC	CHANGE HEADER PN FROM PCV-***AY TO PCV-***-CY.	GAECN03159						
1	3/25/10	RVU			COMBINE ALL P/N WITH CUSTOMER DRAWINGS: C10358, AND C10359.	5996						
0	8/1/05	RVU			DRAWING RELEASED.	4101						
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm) .x ± .12 (3.05) .xxx ± .025 (.635) .xx ± .062 (1.57) ANGLES ±					
							THIRD ANGLE PROJECTION					
							DRAWN BY RVU	DATE 8/1/05	CHK JHAC	SCALE NTS	SHT 1 OF 1	SIZE A

D10100DA/16