


LUMAWISE

TE Internal #: 2154640-3 PCB Mount Hermaphroditic Connector, Right Angle, Board-to-Board, 6 Position, 4 mm Centerline, Tin, Surface Mount, Power & Signal, Natural

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles

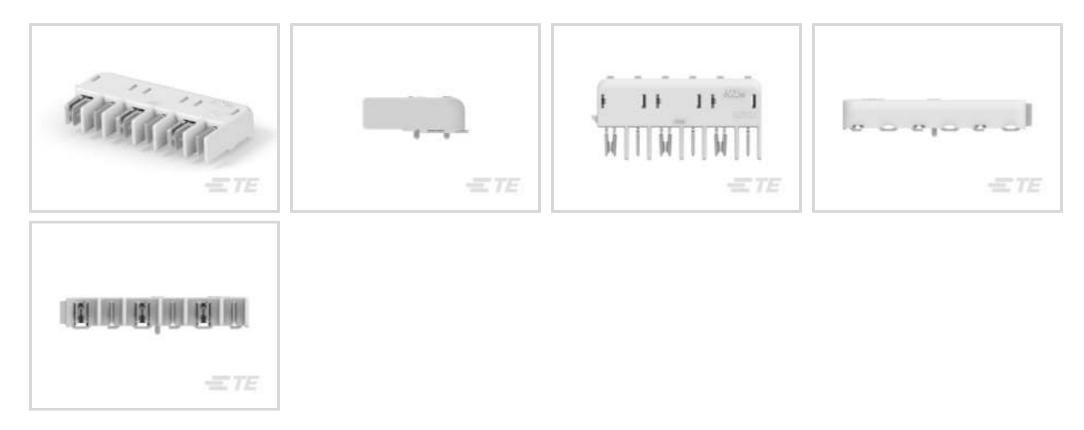

PCB Connector Assembly Type: PCB Mount Hermaphroditic Connector

PCB Mount Orientation: Right Angle

Connector System: Board-to-Board

Number of Positions: 6

Number of Rows: 1

Features

connectivity

Product Type Features

PCB Connector Assembly Type	PCB Mount Hermaphroditic Connector
Connector System	Board-to-Board
Sealable	No
Configuration Features	
PCB Mount Orientation	Right Angle
Number of Positions	6
Number of Rows	1
Body Features	
Primary Product Color	Natural
Contact Features	
Mating Tab Width	3.05 mm[.12 in]
Mating Tab Thickness	.4 mm[.016 in]
Contact Mating Area Plating Material Finish	Matte
Contact Underplating Material	Nickel

PCB Mount Hermaphroditic Connector, Right Angle, Board-to-Board, 6 Position, 4 mm Centerline, Tin, Surface Mount, Power & Signal, Natural



Contact Mating Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	3.81 – 8.89 µm
Contact Type	Hermaphroditic
Contact Current Rating (Max)	6 A
Termination Features	
Rectangular Termination Post & Tail Thickness	.4 mm[.016 in]
Rectangular Termination Post & Tail Width	1 mm[.039 in]
Termination Method to Printed Circuit Board	Surface Mount
Mechanical Attachment	
PCB Mount Alignment Type	Peg
Mating Retention	With
PCB Mount Retention Type	Solder Peg
PCB Mount Retention	Without
PCB Mount Alignment	With
Connector Mounting Type	Board Mount
Housing Features	
Centerline (Pitch)	4 mm
Housing Material	LCP
Jsage Conditions	
Operating Temperature Range	-40 – 105 °C
Operation/Application	
Circuit Application	Power & Signal
ndustry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Type	Tape & Reel
Product Compliance	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant

C For support call+1 800 522 6752

PCB Mount Hermaphroditic Connector, Right Angle, Board-to-Board, 6 Position, 4 mm Centerline, Tin, Surface Mount, Power & Signal, Natural



No Restricted Materials Above Threshold China RoHS 2 Directive MIIT Order No 32, 2016 Current ECHA Candidate List: JUNE 2023 EU REACH Regulation (EC) No. 1907/2006 (235) Candidate List Declared Against: JUN 2018 (191) SVHC > Threshold: Not Yet Reviewed Halogen Content Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.


Compatible Parts



Customers Also Bought

PCB Mount Hermaphroditic Connector, Right Angle, Board-to-Board, 6 Position, 4 mm Centerline, Tin, Surface Mount, Power & Signal, Natural



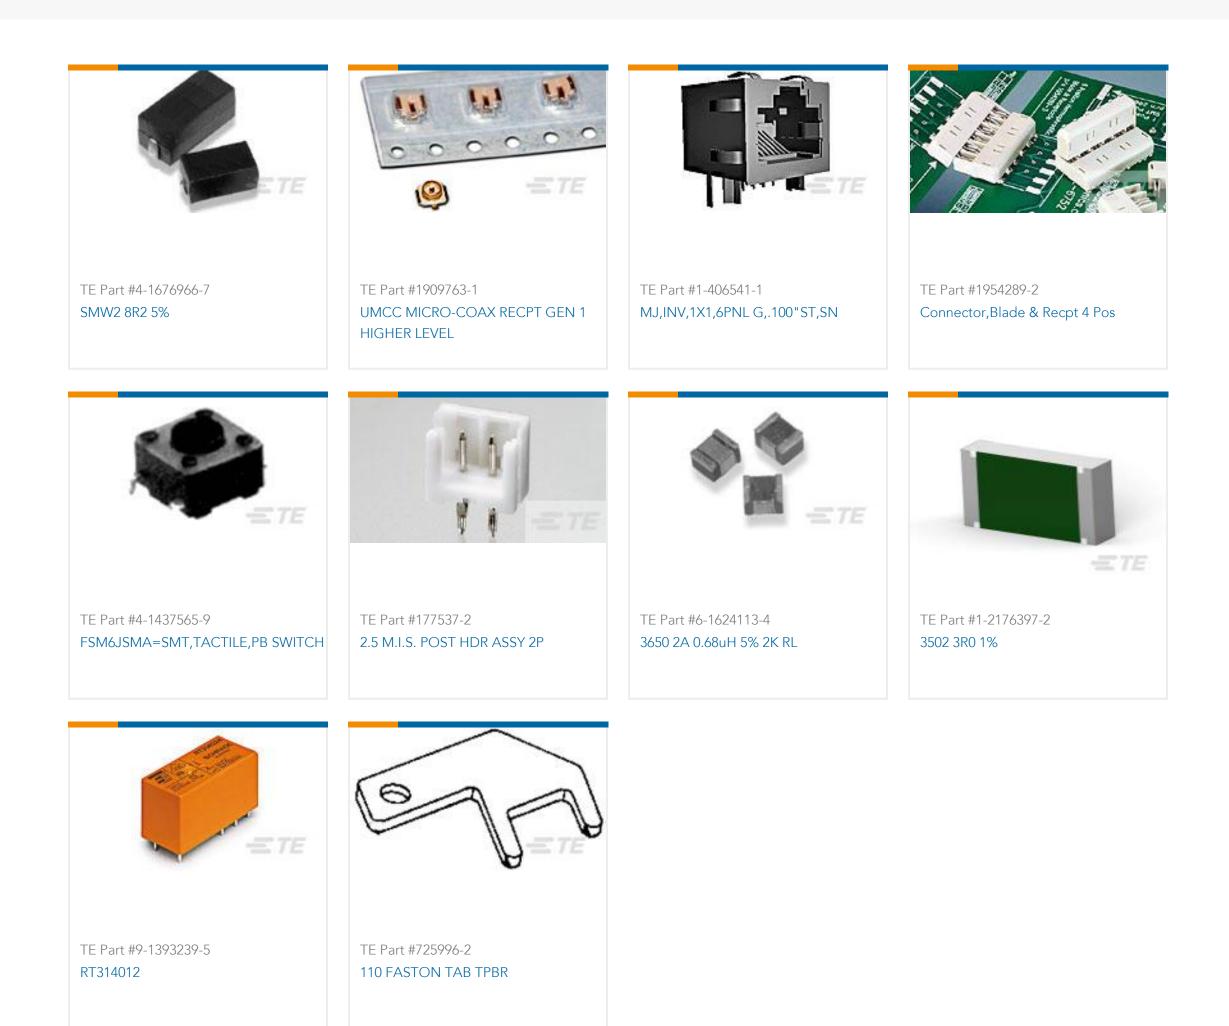

Documents

Product Drawings

Herm Blade & Recept assy w/latch & posts

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2154640-3_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2154640-3_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2154640-3_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

C For support call+1 800 522 6752

PCB Mount Hermaphroditic Connector, Right Angle, Board-to-Board, 6 Position, 4 mm Centerline, Tin, Surface Mount, Power & Signal, Natural



Application Specification

English

Agency Approvals

UL Report

English