

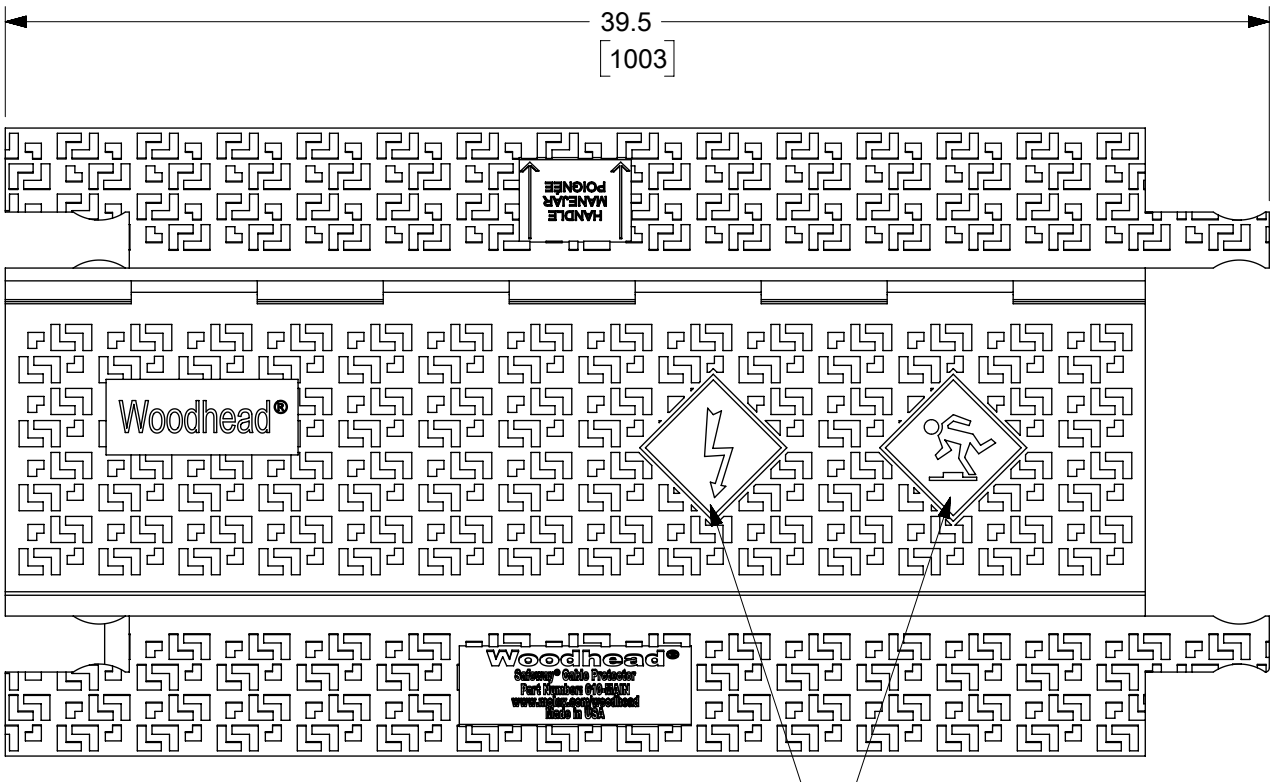



PART NUMBER	MINIMUM ORDER QUANTITY (MOQ)	Woodhead® ENGINEERING NUMBER	LID COLOR
1301380116	1	610-MAIN	SAFETY ORANGE (PER ANSI Z535.1-2006)
1301380185	25	610-MAIN-BP	SAFETY ORANGE (PER ANSI Z535.1-2006)
1301380187	1	610-MAIN-BLK	BLACK
1301380190	25	610-MAIN-BLK-BP	BLACK

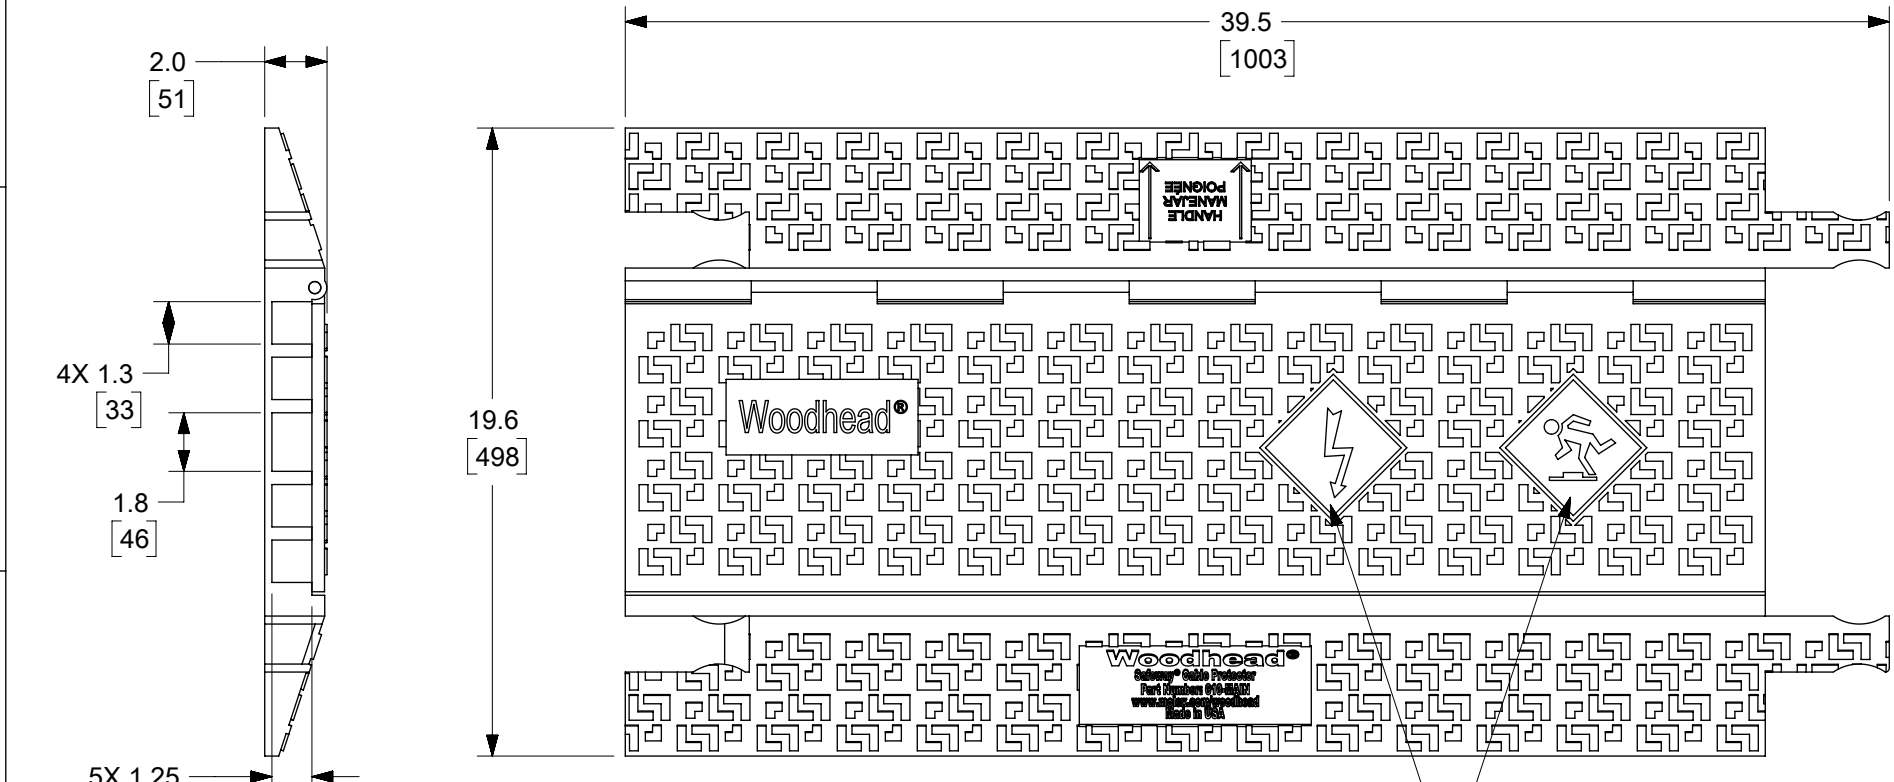

SAFETY WARNING SYMBOLS
(PER ANSI Z535.3-2011)

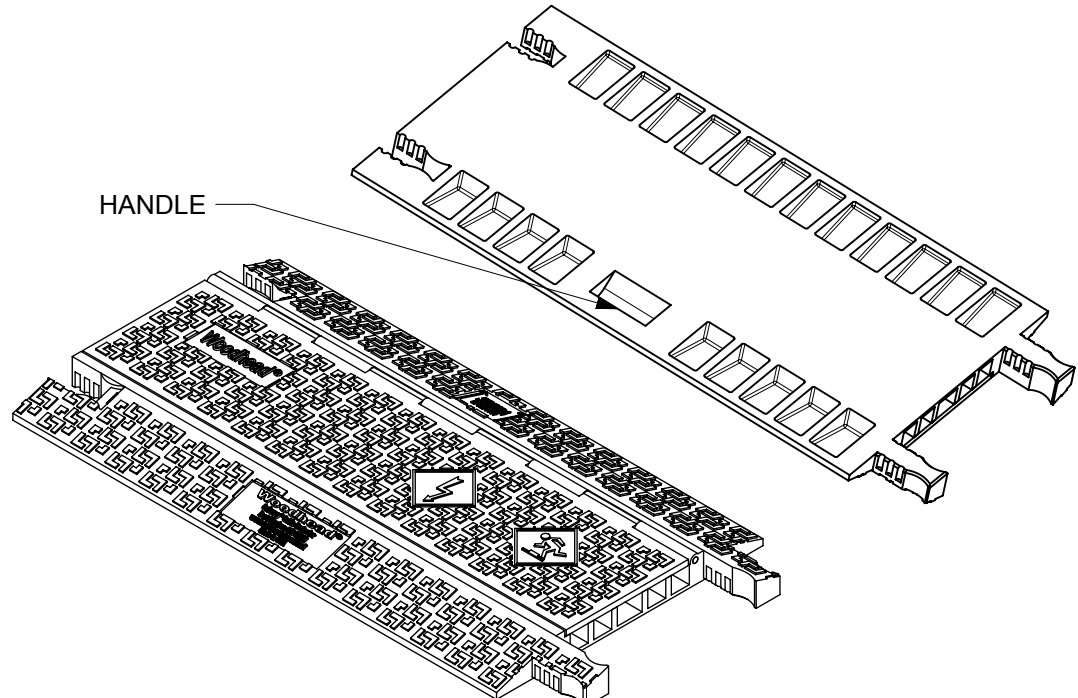

ISOMETRIC VIEWS
SCALE 1:10

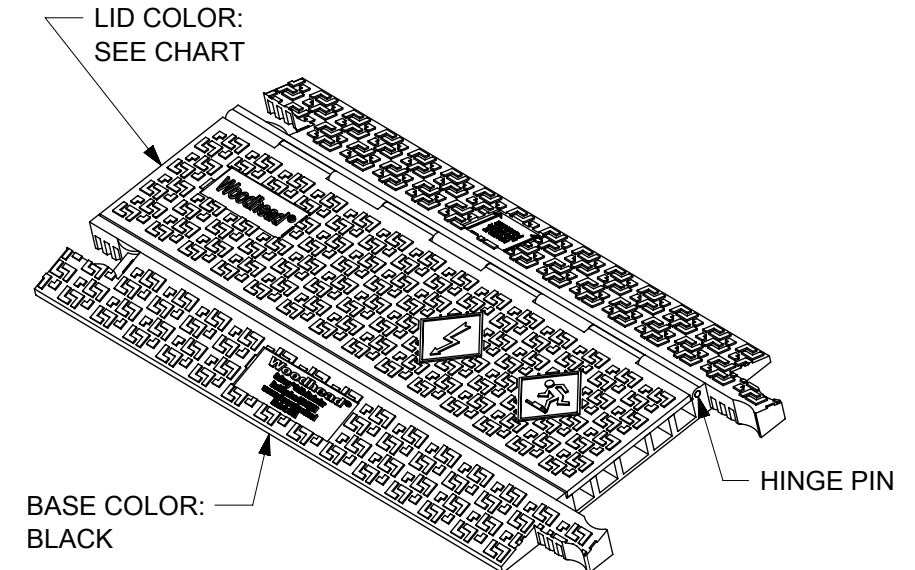

- NOTES:
- MATERIAL:
BASE/LID: HEAVY-DUTY, NON-CONDUCTIVE POLYURETHANE, UV STABILIZED
HINGE PIN: REINFORCED FIBERGLASS
 - WEIGHT: 27 LBS/ 12.2 KG ±10%
 - LOAD CAPACITY PER TIRE/AXLE: 16,300 LBS PER TIRE/32,600 LBS PER AXLE AT 70°F
 - OPERATING TEMPERATURE: -40°F TO 120°F (-40°C TO 48°C)
 - ENGINEERING NO.: SEE CHART
 - ROHS COMPLIANT
 - LID COLOR: SEE CHART

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS	SCALE	CURRENT REV DESC: UPDATE HANDLE POS.							
INCH	1:5	<p>5-CHANNEL CROSSOVER W/FLIP LID 36" SAFEMATE® CABLE PROTECTOR</p> <p>PRODUCT CUSTOMER DRAWING</p>							
GENERAL TOLERANCES (UNLESS SPECIFIED)									
ANGULAR TOL	± 3.0°								
4 PLACES	± 0.25								
3 PLACES	± 0.25								
2 PLACES	± 0.25	EC NO: 602591	2018/07/05	DOCUMENT NUMBER					
1 PLACE	± 0.25	DRWN: WLEUNG	2018/08/10	1301380116					
0 PLACES	± 0.25	CHK'D: WLEUNG	2018/08/16	PSD 000 F					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		INITIAL REVISION:		REVISION					
THIRD ANGLE PROJECTION		DRWN: WLEUNG	2016/04/18	MATERIAL NUMBER					
DRAWING		APPR: HKNEELAND	2016/04/28	CUSTOMER					
SERIES		B-SIZE 130138		SHEET NUMBER					
SEE CHART		1 OF 1							