

# 3M™ TWIN AXIAL CABLE CUSTOM CUTS

**SL8803/04-10DN5-00**


**Typical Application**

SATA cable. Slittable to single pair.  
High speed 100 ohm twin axial applications.

**Construction**


DPDDPD      D = drain wire  
                  P = pair

**PART NUMBERING SYSTEM**


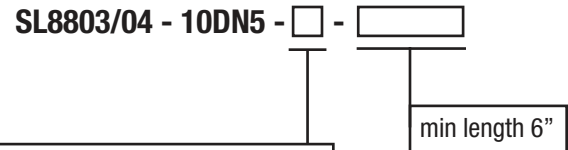


- S - Straight
- O - Opposite (Straight and Formed)
- D - Formed Down
- R - Formed Reversed (one up/one down)

**Top Dimensions**

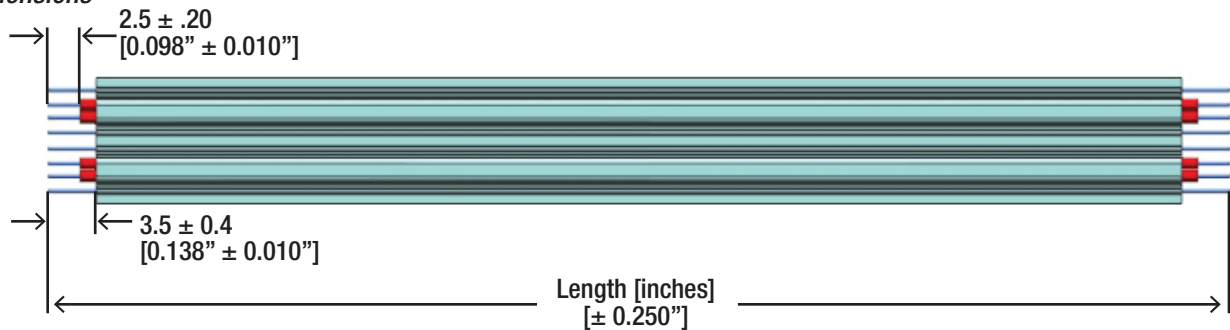

**Side Dimensions**

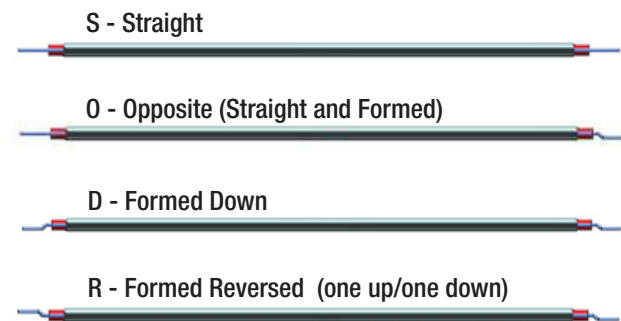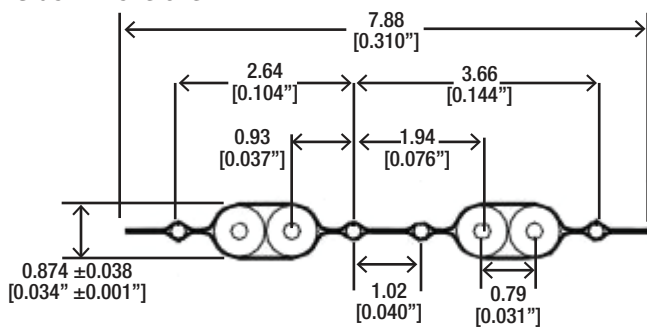

*Length is in inches all other dimensions are in mm [inches]*

*Conductor length is determined before lead forming*

Digi-Key can offer you a quote on your secondary services. For more information on 3M available options or if you need assistance, contact [CustomCut.3MProducts@digikey.com](mailto:CustomCut.3MProducts@digikey.com). Please send dimensional drawings to the aforementioned e-mail address.