


**Model 2970  
Triple Banana Plug**



**Model 2970  
Triple Banana Plug**

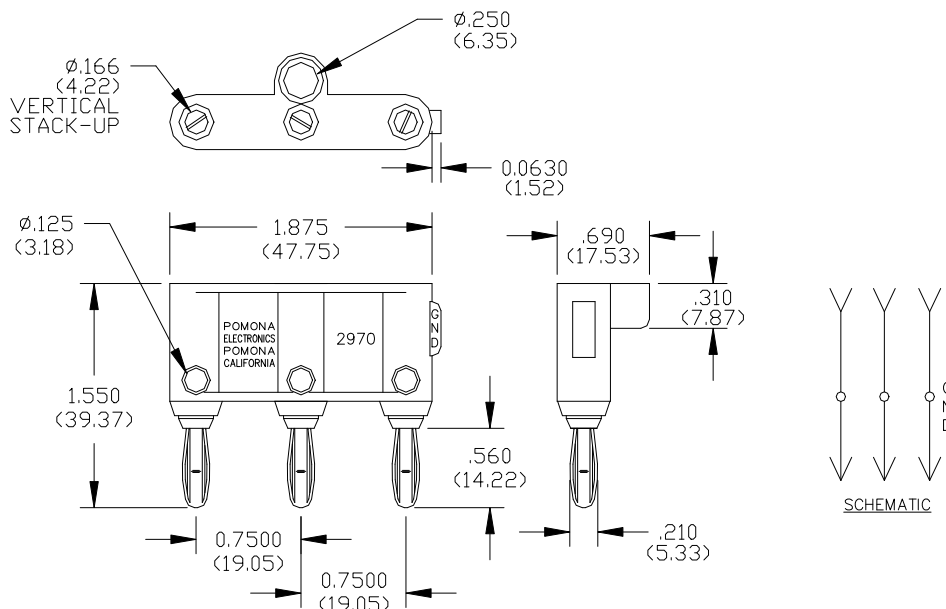

**Features**

- Set screws secure leads.
- Ideal for balanced line 2 conductor shielded cable assemblies.

**Materials**

**Banana Jacks:**

Material: Brass per QQ-B-626, Alloy 360, 1/2 Hard.  
Finish: Nickel plate per QQ-N-290, Class 2, (.0002/.0003).

**Banana Plugs:**

Body: Brass per QQ-B-626, Alloy 360, 1/2 Hard.  
Spring: Beryllium Copper per QQ-C-533, Alloy 172, Cond. H.T.  
Finish: Nickel plate per QQ-N-290, Class 2, (.0002/.0003).

**Insulation:**

Material: Polypropylene molded to Banana Jack and Banana Plug bodies.

Marking: "POMONA ELECTRONICS, POMONA CALIF., 2970"

**Cross holes:** 3.18mm (.125") dia. With #8-32 slotted set screw to secure lead wires.

**Specifications**

**Operating Voltage:**

Hands free usage in controlled voltage environments: 5000 Vrms maximum.

*For CE compliance:* not intended for hand-held use at voltages above 33 Vrms/70 Vdc.

**Operating Temperature:** +50°C (+122°F) Max.

**Current:** 15 Amperes

**Ordering Information**

Model: 2970-\*

\*=Color, -0 (Black), -2 (Red)

**Ordering Example:** 2970-2 (Triple Banana Plug with Red insulation)

**USA:** Sales: 800-490-2361  
Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
Fax: 425-446-5844

**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500

**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.