
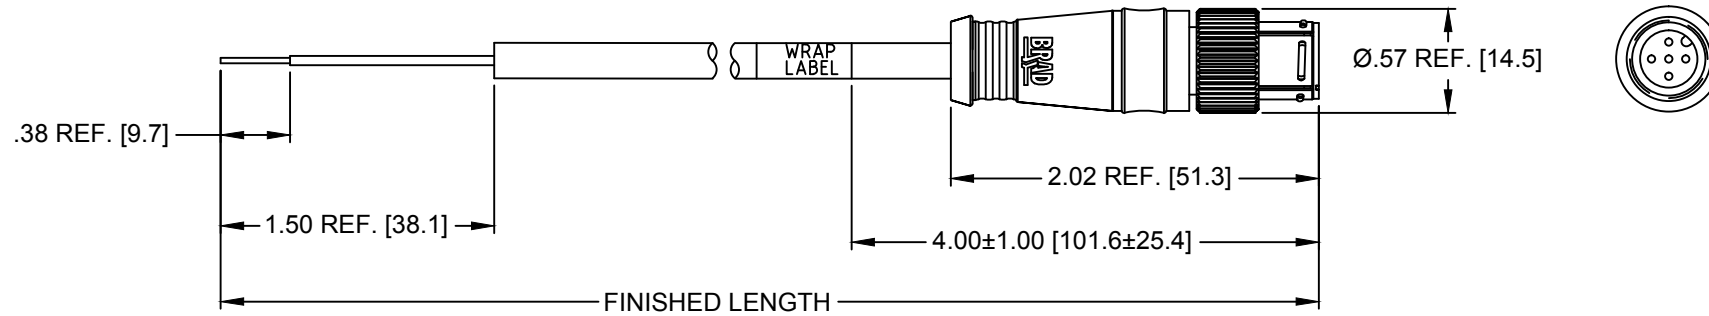


MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
1211930001	T04006B30M003	0.3 M +1.9 CM/-0 [1.0' +0.75"/-0]
1211930002	T04006B30M010	1.0 M +5.6 CM/-0 [3.3' +2.19"/-0]

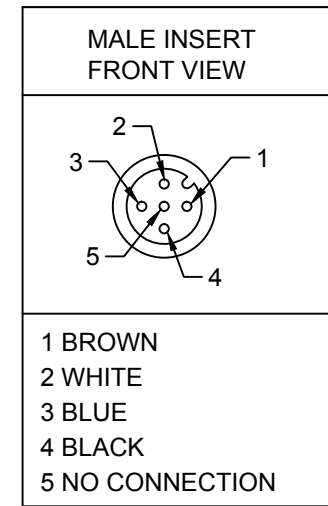

**T04006B30M020**

WIRE TYPE  
0.34mm<sup>2</sup> [22 AWG] BLACK

CABLE LENGTH  
M003----0.3 METER  
M020----2 METER  
M100----10 METER

MECHANICAL  
CONTACT : GOLD/NICKEL OVER COPPER ALLOY  
INSERT : BLACK NYLON  
COUPLING NUT: NICKEL PLATED COPPER ALLOY  
MOLDED BODY: BLACK TPE  
CABLE: 0.34mm<sup>2</sup> [22 AWG] 4 CONDUCTORS BLACK JACKET  
WRAP LABEL: MYLAR YELLOW WITH BLACK LETTERS

ELECTRICAL  
VOLTAGE RATING: 250V AC/DC  
AMPERAGE: 4A

ENVIRONMENTAL  
PROTECTION: IP67

OPERATION TEMP: -20°C~80°C

THE RECOMMENDED FEMALE CONNECTOR SHOULD HAVE  
NICKEL PLATING ON THE FEMALE THREADS

INITIAL RELEASE EC NO: IPG2015-1880 DRWN: KJOZWIK 2015/04/28 CHKD: VOU 2015/04/28 APPR: BWOODMAN 2015/05/12 REV A	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE INCH [MM]	SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
	▽=0	4 PLACES	mm INCH	DRAWN BY DATE	TITLE	
	∇=0	3 PLACES	±--- ±---	KJOZWIK 2014/02/13	MIC 4P MALE PUSHLOCK STRAIGHT BLACK TPU	
		2 PLACES	±--- ±---	CHECKED BY DATE	MOLEX INCORPORATED	
		1 PLACE	±--- ±---	APPROVED BY DATE	MATERIAL NO. DOCUMENT NO. SHEET NO.	
		ANGULAR ±.5°		BWOODMAN 2015/05/12	SD-121193-003 1 OF 1	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		